

2nd. FLOOR LIFE SAFETY PLAN

SCALE: 1/4" = 1'-0"

AREA CALCULATION: A	
1st FLOOR - A/C	1,099 S.F.
2nd FLOOR - A/C	1,094 S.F.
3rd FLOOR - A/C	588 S.F.
TOTAL - A/C:	2,781 S.F.
GARAGE	
ENTRY	219 S.F.
PATIO	43 S.F.
BALCONY 1	65 S.F.
BALCONY 2	155 S.F.
BALCONY 3	64 S.F.
UPPER DECK	18 S.F.
ROOF	835 S.F.
SUB-TOTAL:	588 S.F.
GRAND TOTAL:	1,987 S.F.

AREA CALCULATION: B	
1st FLOOR - A/C	1,040 S.F.
2nd FLOOR - A/C	1,146 S.F.
3rd FLOOR - A/C	584 S.F.
TOTAL - A/C:	2,770 S.F.
GARAGE	
ENTRY	216 S.F.
PATIO	40 S.F.
BALCONY 1	64 S.F.
BALCONY 2	41 S.F.
BALCONY 3	64 S.F.
UPPER DECK	777 S.F.
ROOF	584 S.F.
SUB-TOTAL:	1,786 S.F.
GRAND TOTAL:	4,456 S.F.

AREA CALCULATION: C	
1st FLOOR - A/C	1,092 S.F.
2nd FLOOR - A/C	1,086 S.F.
3rd FLOOR - A/C	588 S.F.
TOTAL - A/C:	2,766 S.F.
GARAGE	
ENTRY	216 S.F.
PATIO	43 S.F.
BALCONY 1	66 S.F.
BALCONY 2	154 S.F.
BALCONY 3	66 S.F.
UPPER DECK	18 S.F.
ROOF	828 S.F.
SUB-TOTAL:	588 S.F.
GRAND TOTAL:	1,979 S.F.

WALL + PARTITION SCHEDULE	
W1	ONE LAYER OF 1/2" GYPSUM BD. ON 1X2 FT. WOOD FURRING @ 16" O.C. W/ R41 INSULATION ON INTERIOR AND 5/8" STUCCO ON EXTERIOR OF 8" CONCRETE BLOCK. PER U.L. ASSEMBLIES U302.
W2	ONE LAYER OF 1/2" GYPSUM BD. ON 1X2 FT. WOOD FURRING @ 16" O.C. W/ R41 INSULATION ON CONC. BLOCK SEE ADJACENT UNIT FOR FINISH ON OTHER SIDE-2HR TENANT SEP. WALL. PER U.L. ASSEMBLIES U302.
W3	ONE LAYER OF 1/2" GYPSUM BD. ON 1X2 FT. WOOD FURRING @ 16" O.C. W/ R41 INSULATION ON CONC. BLOCK SEE ADJACENT UNIT FOR FINISH ON OTHER SIDE-2HR TENANT SEP. WALL. PER U.L. ASSEMBLIES U302.
W4	7/8" STUCCO ON 13/32" CDX FLYWD. SHEATH ON EXTERIOR. 1 1/2" GYPSUM BOARD ON INTERIOR OF 2X8 WOOD STUDS @ 16" O.C. W/ R-11 BATT INSULATION.
W5	ONE LAYER OF 5/8" TYPE 'X' GYPSUM BD. ON BOTH SIDES OF 2X6 STUDS @ 16" O.C./W/ R-11 BATT. INSUL. AT GARAGE ONLY? 1 HR GARAGE SEPARATION PER U.L. ASSEMBLY # L1-302 SEE SHEET A-15.

(CONFIDENTIAL)

AREA CALCULATION: BUILDING	
A - A/C	2,781 S.F.
B - A/C	2,770 S.F.
C - A/C	2,766 S.F.
TOTAL - A/C:	8,317 S.F.
A	
B	1,987 S.F.
C	1,786 S.F.
SUB-TOTAL:	5,752 S.F.
GRAND TOTAL:	14,069 S.F.



CAG
ARCHITECTS, LLC.


FLORIDA CERTIFICATE #AR 0017819
406 S. NEPTUNE DRIVE,
SAFELITE BEACH, FLORIDA 32937
PHONE (321) 389-8787

© 2019
All reports, plans, specifications, computer files, field data, notes and other documents are instruments of service prepared by CAG Architects, LLC (C.A.G.) as instruments of service remain the property of C.A.G. C.A.G. shall retain all common law, statutory and other reserved rights, including the copyright therein. Any use or reproduction of this document without written permission from C.A.G. is a violation of Federal copyright laws.

Archila
Design
GROUP
ARCHITECTURE

923 San Rafael Rd. SW
Palm Bay, FL 32909
PHONE: (561) 504-4240

1602 N. RIVERSIDE DR.
TRIPLEX
POMPANO BEACH, FL.
BROWARD COUNTY, FLORIDA

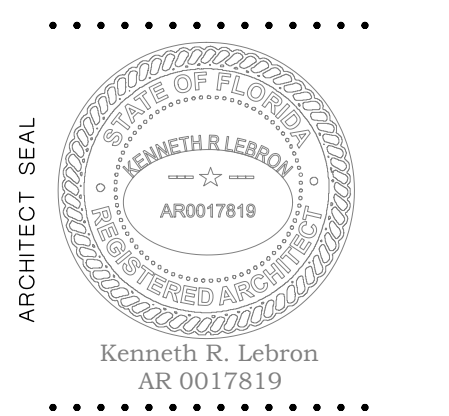

BUILDING
2nd. FLOOR
LIFE SAFETY

Project Manager:
OSCAR
Drawn by: G.R.
Project No.: 24-925

10/03/2024
BLDG COMMENTS 4/8/25

A-2

DRC

PZ25-12000003

05.21.2025