

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

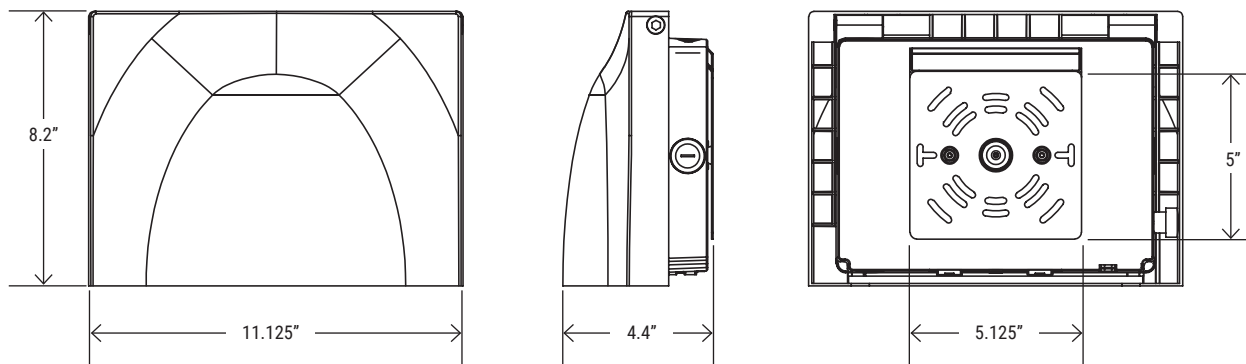
KEY FEATURES

- Compact and slim profile IP65/IK10 rated housing
- Full cut-off with adjustable directional illumination
- Comes with 12W integrated cold weather (-20C) self-diagnostic emergency driver
- Optional On/off integrated photocell sensor

TECHNICAL SUMMARY

WATTAGE:	25W AC power / 12W Emergency Power
LUMEN/EFFICACY	3200LM normal lumen / 1500LW Emergency lumen, 125LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	3000/4000/5000K CCT changeable / 70+ CRI
CONTROL	Optional On/off photocell sensor, 0-10V dimming driver
VALIDATIONS	UL Wet location listed, IP65, IK10, FCC, RoHS
LIFETIME	L90 > 46,000 hours, 5 year warranty
SURGE PROTECTION	3Kv SPU
OPERATION TEMP.	-13°F ~ 104°F / With EM -4°F ~ 104°F
FINISH	Dark Bronze, Black, White, Silver, custom

*Delivered lumen may vary, refer to photometric for full performance data

**DIMENSIONS**

Weight: 28 lbs

DRC

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

	-		-		-		-	
Series	Lumen Package	Voltage	CCT	Control	Finish			
EWA	32L - (3200LM/1500LM EM)	U - (120-277V)	CC - (30K/40K/50K selectable)	C1 - (on/off with 0-10V dimming driver) C2 - (on/off photocell with 0-10V dimming driver)	BK - (Black) DB - (Dark Bronze) WH - (White) *SL - (Silver)			
					*Made to order			

SPECIFICATIONS

CONSTRUCTION

Slim profiled cast aluminum housing with stainless steel screws, luminaire angle is adjustable from 0 to 90 degree.

FINISH

Powder coated finish in white, black, dark bronze or aluminum.

OPTICS

Impact proof and UV resist polycarbonate frosted lens.

ELECTRICAL

Long life LED system, 30/40/50K CCT and changeable with a Class 2, constant current 120V-277Vac, 50-60 HZ driver and LiFePO4 battery backup emergency driver. Battery is 24 hours charge and with minimum 90 mins discharge, battery is rated for -20°C to +50°C operational ambient temperature.

VALIDATIONS

UL Wet location listed, IP65, IK10, FCC, RoHS

MOUNTING

Wall mount

DRC