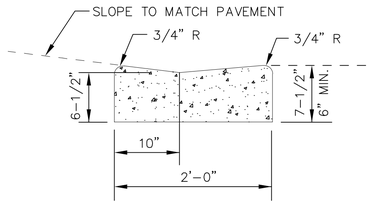

DROP CURB



TYPE "F" CURB & GUTTER

CONCRETE CURB AND GUTTER DETAIL

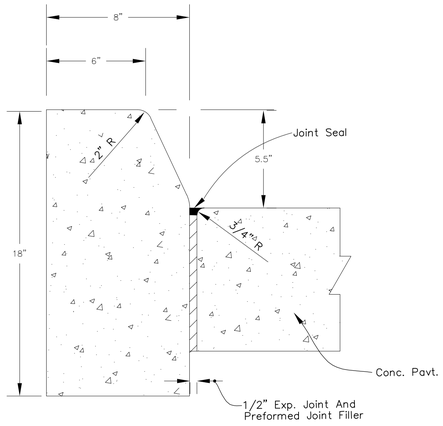

TYPE "D" CURB

NOTE

FOR USE ADJACENT TO CONCRETE OR FLEXIBLE PAVEMENT, CONCRETE SHOWN. EXPANSION JOINT, PREFORMED JOINT FILLER AND JOINT SEAL ARE REQUIRED BETWEEN CURBS AND CONCRETE PAVEMENT ONLY.

CONCRETE CURB DETAIL

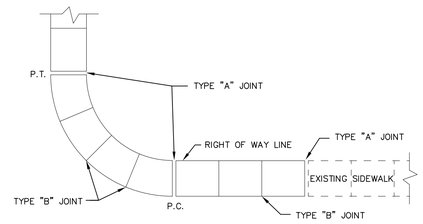

PLAN

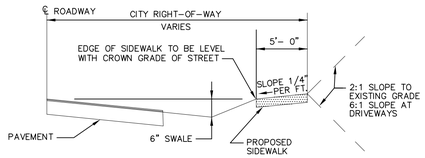

TYPICAL SIDEWALK SECTION

SIDEWALK DETAILS

TABLE OF SIDEWALK JOINTS	
TYPE	LOCATION
"A"	JOINT SHALL BE PLACED AT P.C. AND P.T. OF CURVES, JUNCTION OF EXISTING SIDEWALKS, EVERY 60' ON NEW SIDEWALKS AND WHERE SIDEWALKS ABUT CONCRETE CURBS, DRIVEWAYS AND SIMILAR STRUCTURES.
"B"	JOINT SHALL BE PLACED 5'-0" CENTER
"C"	JOINT SHALL BE PLACED AT 20' INTERVALS



TYPE "A" JOINT



TYPE "B" JOINT



TYPE "C" JOINT

NOTE: SIDEWALK SHALL BE 4" THICK EXCEPT IN DRIVEWAYS WHERE THE THICKNESS SHALL BE 6".

SIDEWALK DETAILS

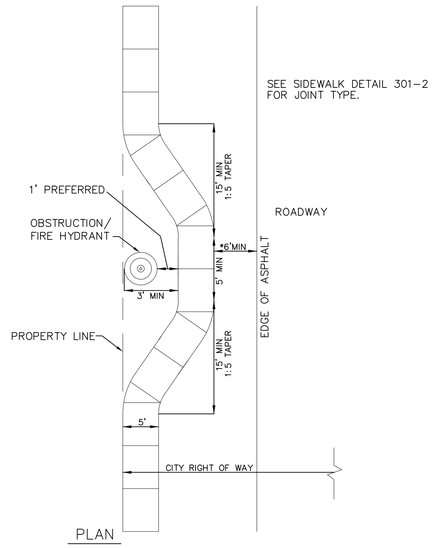

PLAN

SIDEWALK OBSTRUCTION

* IF 6' DISTANCE CANNOT BE OBTAINED PROVIDE CURBING.

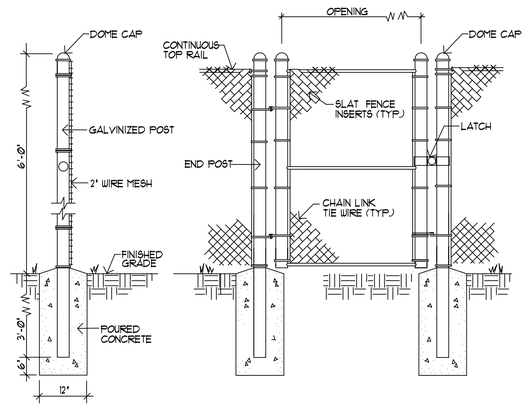

TYPICAL FENCE POST SINGLE LEAF GATE

CHAIN LINK FENCE INSTALLATION DETAILS (Without Barbed Wire)

NOTE:
ALL FENCE POST INSTALATIONS MUST MEET ALL FLORIDA BUILDING CODES

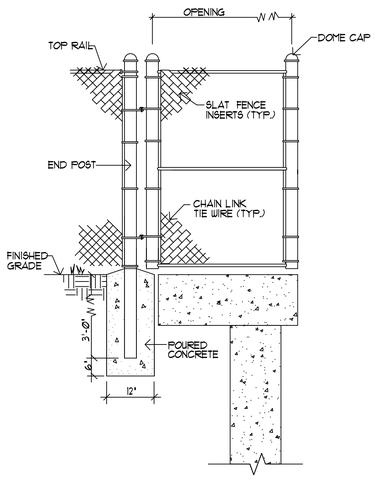

CHAIN LINK FENCE

NOTE:
ALL FENCE POST INSTALATIONS MUST MEET ALL FLORIDA BUILDING CODES

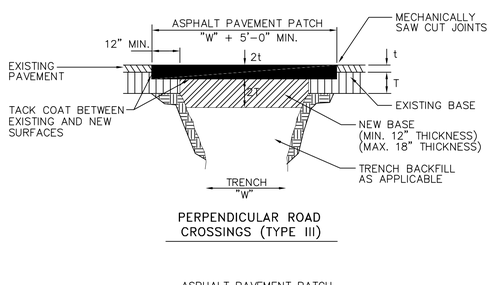

PERPENDICULAR ROAD CROSSINGS (TYPE III)

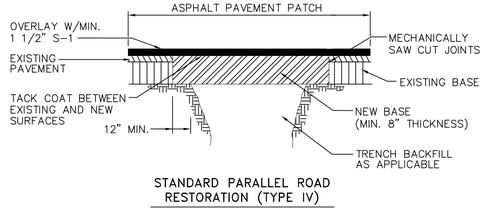

STANDARD PARALLEL ROAD RESTORATION (TYPE IV)

SURFACE RESTORATION

KEITH
301 East Atlantic Blvd.
Pompano Beach, FL 33060
PH: (954) 788-3400
Florida Engineering Business License: CA7928
Florida Surveyor and Mapper Business License: LB6860
Florida Landscape Architecture Business License: LC26000457

REVISIONS

NO.	DESCRIPTION	DATE

PRELIMINARY PLAN NOT FOR CONSTRUCTION

THESE PLANS ARE NOT FULLY PERMITTED AND ARE SUBJECT TO REVISIONS MADE DURING THE PERMITTING PROCESS.

RESPONSIBILITY FOR THE USE OF THESE PLANS PRIOR TO OBTAINING PERMITS FROM ALL AGENCIES HAVING JURISDICTION OVER THE PROJECT WILL FALL SOLELY UPON THE USER.

ISSUE DATE:	10/11/2023
DESIGNED BY:	NW
DRAWN BY:	JL
CHECKED BY:	NW
BID-CONTRACT:	

This item has been digitally signed and sealed by **NILES T. WARRICK, P.E.** on the date adjacent to the seal.

NILES T. WARRICK LICENSE No. 94320 STATE OF FLORIDA PROFESSIONAL ENGINEER

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

2023.10.11 10:27:28-04'00'

NILES T. WARRICK, P.E.
FLORIDA REG. NO. 94320
(FOR THE FIRM)

CLIENT

YURI GURFEL

PROJECT

911 E. ATLANTIC BLVD.
MULTIFAMILY
Pompano Beach, FL

SHEET TITLE

PAVING, GRADING, AND DRAINAGE DETAILS

SHEET NUMBER CP-501

PROJECT NUMBER 1337.01

STATUS: PRELIMINARY

P&Z
PZ23-12000043
05/22/2024

Plotted by: dillingworth On 10/11/2023 9:05 AM

Drawing name: K:\13376.01 - 911 East Atlantic Blvd. Multifamily - Yuri Gurfel\Engineering\Cadd\13376.01-CP-5XX.dwg

ENGINEERING STANDARDS 2022

REVISIONS BY	DATE	ENGINEERING DIVISION CITY OF POMPANO BEACH	CONCRETE CURB AND GUTTER	DATE: MAY 2022 DWG. NO. 300-1
S.S.	07-2016	SCALE: N.T.S.		

ENGINEERING STANDARDS 2022

REVISIONS BY	DATE	ENGINEERING DIVISION CITY OF POMPANO BEACH	CONCRETE CURB	DATE: MAY 2022 DWG. NO. 300-2
S.S.	01-2014			
S.S.	08-2015			
S.S.	07-2016	SCALE: N.T.S.		

ENGINEERING STANDARDS 2022

REVISIONS BY	DATE	ENGINEERING DIVISION CITY OF POMPANO BEACH	SIDEWALK DETAILS	DATE: JUNE 2022 DWG. NO. 301-1
		SCALE: N.T.S.		

ENGINEERING STANDARDS 2022

REVISIONS BY	DATE	ENGINEERING DIVISION CITY OF POMPANO BEACH	SIDEWALK DETAILS	DATE: JUNE 2022 DWG. NO. 301-2
		SCALE: N.T.S.		

ENGINEERING STANDARDS 2022

REVISIONS BY	DATE	ENGINEERING DIVISION CITY OF POMPANO BEACH	SIDEWALK OBSTRUCTION	DATE: JUNE 2022 DWG. NO. 301-3
T.W.	1-2008	SCALE: N.T.S.		

ENGINEERING STANDARDS 2022

REVISIONS BY	DATE	ENGINEERING DIVISION CITY OF POMPANO BEACH	CHAIN LINK FENCE	DATE: MAY 2022 DWG. NO. 303-3
		SCALE: N.T.S.		

ENGINEERING STANDARDS 2022

REVISIONS BY	DATE	ENGINEERING DIVISION CITY OF POMPANO BEACH	CHAIN LINK FENCE	DATE: MAY 2022 DWG. NO. 303-4
		SCALE: N.T.S.		

ENGINEERING STANDARDS 2022

REVISIONS BY	DATE	ENGINEERING DIVISION CITY OF POMPANO BEACH	SURFACE RESTORATION	DATE: MAY 2022 DWG. NO. 306-2
		SCALE: N.T.S.		