


| PLANTS & MATERIALS LIST | | | | | | |
|--|---------|------------------------------------|--------------------------|-----------------------------|----------|------------|
| *NOTE: DRAWING SUPERSEDES MATERIALS LIST AND TAKE OFFS. IT'S THE CONTRACTOR'S RESPONSIBILITY TO CONFIRM ALL QUANTITIES AND TAKE OFFS PER DRAWING. SHOULD YOU FIND A DISCREPANCY NOTIFY DESIGNER. | | | | | | |
| SYM | QTY | BOTANICAL NAME | COMMON NAME | SPECIFICATIONS | SPACING | REMARKS |
| TREES | | | | | | |
| CDI | 6 | COCCOLOBA DIVERSIFOLIA | PIGEON PLUM | 14' OA., 2" CAL. DBH. | A.S. | FLORIDA #1 |
| CERI | 5 | CONOCARPUS ERECTUS | GREEN BUTTONWOOD | 12' OA. HT., 2" CAL. DBH. | A.S. | FLORIDA #1 |
| CER2 | 5 | CONOCARPUS ERECTUS | GREEN BUTTONWOOD | 14' OA. HT., 2.5" CAL. DBH. | A.S. | FLORIDA #1 |
| CES | 5 | CONOCARPUS ERECTUS SERICEUS | SILVER BUTTONWOOD | 14' OA. HT., 2" CAL. DBH. | A.S. | FLORIDA #1 |
| PRIVACY HEDGE | | | | | | |
| CIR | 79 | CHRYSOBALANUS ICACO 'RED TIP' | COCOPLUM | 2' HT. | 24" O.C. | FLORIDA #1 |
| ACCENTS, SHRUBS, GROUNDCOVERS AND VINES | | | | | | |
| FMG | 55 | FICUS MICROCARPA 'GREEN ISLAND' | FICUS 'GREEN ISLAND' | 7 GAL | 18" O.C. | FLORIDA #1 |
| ICN | 20 | IXORA COCCINEA 'NORA GRANT' | FLAME OF THE WOODS | 3 GAL., 2' O.A. HT. | 24" O.C. | FLORIDA #1 |
| SOD & ARTIFICIAL TURF | | | | | | |
| (SF) | (UNITS) | | | | | |
| 7,487 | 1 | STENOTAPHRUM SECUNDATUS 'FLORATAM' | ST. AUGUSTINE 'FLORATAM' | | | |
| MULCH | | | | | | |
| 1,860 | 233 | BROWN MULCH | 2 CU FT BAG | 8 SF @ 3" | | |
| EDGING | | | | | | |
| 308 | 19.25 | PERMALOCK ALUMINUM EDGING | 4" X 16 LF / STICK | | | |

| TREE DISPOSITION TABLE | | | | | | |
|------------------------|-----|----------------|--------------|-------------------------------|---------------------------------|-----------------------------|
| SYM | QTY | BOTANICAL NAME | COMMON NAME | DIMENSIONS (HT X SPR, DBH) | CONDITION (GOOD, FAIR, POOR) | REMAIN, REMOVE, RELOCATE |
| PALMS | | | | | | |
| ISP | 1 | SABAL PALMETTO | CABBAGE PALM | 18' OA X 10' SPR. | FAIR | REMOVE |
| TREES | | | | | | |
| IF | 1 | FICUS SP. | FICUS SP. | 21' OA X 20' SPR. X 18" DBH. | FAIR | REMOVE |

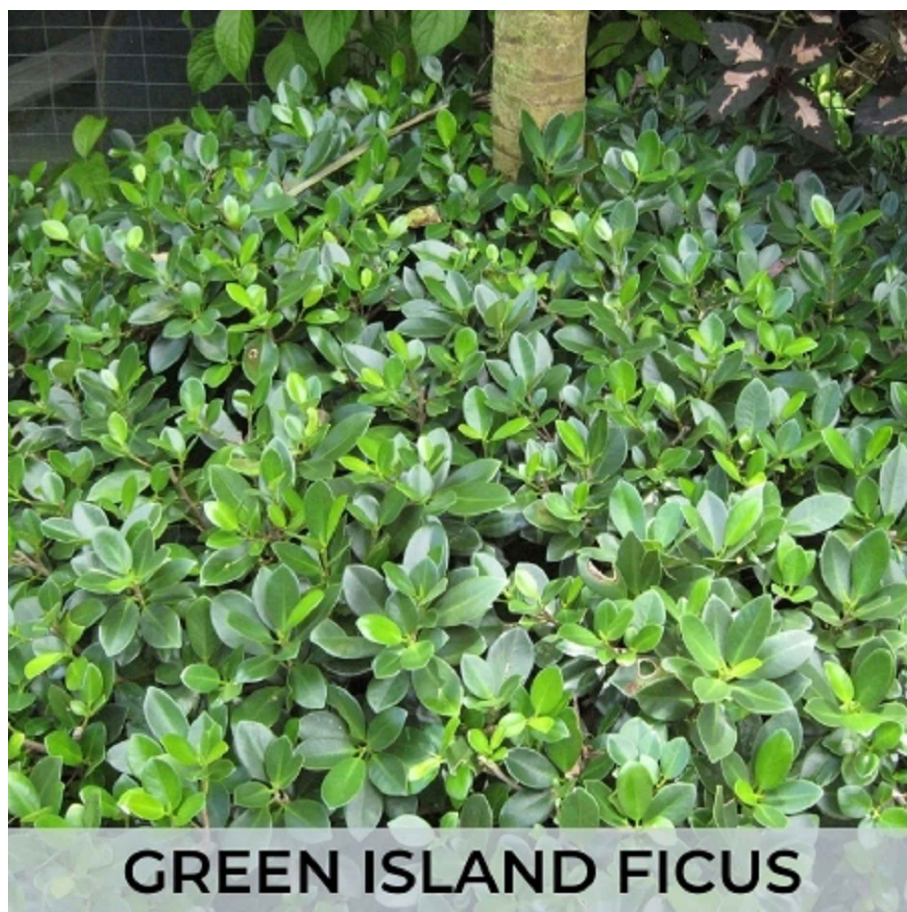

| | |
|-----------|----------|
| DATE: | 5/23/23 |
| DESIGNER: | MK |
| CAD: | LC/AJ/DF |

| | |
|--------------|--------|
| PROJECT NO.: | 22-026 |
|--------------|--------|

| | |
|-----------|----|
| REVISION: | R5 |
|-----------|----|

| |
|--|
| |
|--|

| |
|---------------|
| SCALE: N.T.S. |
|---------------|

| | |
|---------------|----|
| DRAWING CODE: | L2 |
|---------------|----|

| | |
|------------|----------|
| SHEET NO.: | 02 OF 03 |
|------------|----------|