

August 10, 2023

## Drainage Calculations for 12 Houses Pompano Beach NW 10th Street Pompano Beach, FL 33060


### PEAK STAGES

STORM EVENT	PRE-DEVELOPMENT	POST-DEVELOPMENT
5 Year - 1 Hour	N/A	6.50' NAVD88
25 YEAR - 3 DAY	9.85' NAVD88	9.50' NAVD88
100 YEAR - 3 DAY	10.11' NAVD88	9.75' NAVD88

Prepared by:

**WILFORD  
ZEPHYR**

Digitally signed by  
WILFORD ZEPHYR  
Date: 2023.08.15  
17:03:04 -04'00'

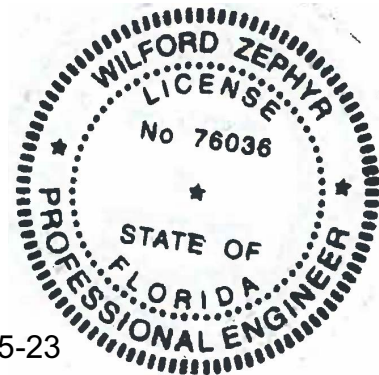

8-15-23

Wilford Zephyr, P.E., LEED AP, CFM

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY WILFORD ZEPHYR ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Project Name:

12 Houses Pompano Beach

Date:

08/10/23

Project Address:

NW 10th Street

Designed by:

Wilford Zephyr, P.E.

ZE Project #: 23-34

Pompano Beach, FL 33060

Pre Development

All Elevations are referenced to NAVD88 vertical datum

## Site Data

Project Area:	1.9 AC	
Pavement Area:	0.19 AC	
Building Area:	0.46 AC	
Grass Area (Pervious):	1.25 AC	
Lake Area:	0 AC	
Total Pervious Area:	1.25 AC	65.79%
Total Impervious Area:	0.65 AC	34.21%

## Design Parameters

Water Table Elevation:	3.50 ft
Exist. Crown of Road Elev.:	10.26 ft
Average Finished Grades:	8.70 ft
Prop. Finished Floor Elev.:	12.50 ft

## C Factor

Pervious:	0.6
Impervious:	0.9

$$\text{C Factor (weighted)} = \frac{1.25 (0.60) + 0.19 (.90)}{1.44} = 0.64$$

## Storm Event Information

3 year, 1 hour event:	2.5 inches (for retention/detention)
25 year, 24 hour event:	10.50 inches
25 year, 72 hour event:	14.27 inches (Finished Floor Elevation)
100 year, 24 hour event:	13 inches
100 year, 72 hour event:	17.67 inches (Finished Floor Elevation)

**Soil Storage (S) & Curve Number (CN)**

All Elevations are referenced to NAVD88

**Cumulative Water Storage (CWS)**

Design Water Table (WT) = 3.50 ft

Average Finished Grade = 8.70 ft

Average Depth to Water Table (DWT) = 5.20 ft

Cumulative Water Storage (CWS) = 6.75 IN

(from table below)

**Cumulative Soil Moisture Storage (flatwoods soil)**

DWT	NAS	DAS
1.0 '	0.60 "	0.45 "
2.0 '	2.50 "	1.88 "
3.0 '	5.40 "	4.05 "
4.0 '	9.00 "	6.75 "

DWT=Depth to Water Table

NAS=Natural Available Storage

DAS=Developed Available Storage

**Soil Storage (S in inches)**

$S = CWS \times (\text{percentage of total pervious area}) =$

4.44

**Curve Number (CN)**

$CN = 1000 / (S + 10) =$  69.25

**Water Quality Retention/Detention Calculations**

- A. For a wet detention system, size system for highes ot first inch of runoff over the entire site or 2.5" times the % impervious area  
B. For a dry detention system, size system for 75% of the volume required for a wet detention system.  
C. For a retention system, size system for 50% of the volume required for a wet detention system.

**1 IN Over Entire Site**

1 IN X 1 ft /12 IN X      =      First 1" of runoff

1" X 1.90 acres = 1.90 acre-inches (0.158 acre-ft)

**2.5 INCHES Times Percent Impervious**

Total project area - roof area = 1.90 acres - 0.46 acres = 1.44 acres

1.44 acres - 1.25 acres (pervious area) = 0.19 acres

0.19 acres / 1.44 acres X 100% = 13.19% impervious

2.5" X 0.1319 = 0.33" to be treated

0.33" X 1.90 acres = 0.63 acre-inches (0.053 acre-feet)

**0.158 acre-ft of storage required for water quality.**

**(1.90 AC-IN storage provided in Ret. Areas)**

**Water quality storage provided in proposed  
exfiltration trench system.**

**Water Quality Vol. Provided:**

RET. AREA #1 = 0.162 AC-IN  
RET. AREA #2 = 0.158 AC-IN  
RET. AREA #3 = 0.158 AC-IN  
RET. AREA #4 = 0.158 AC-IN  
RET. AREA #5 = 0.158 AC-IN  
RET. AREA #6 = 0.158 AC-IN  
RET. AREA #7 = 0.162 AC-IN  
RET. AREA #8 = 0.158 AC-IN  
RET. AREA #9 = 0.158 AC-IN  
RET. AREA #10 = 0.158 AC-IN  
RET. AREA #11 = 0.158 AC-IN  
RET. AREA #12 = 0.158 AC-IN

**Runoff (Q) & Runoff Volume (V) Calculations**

PZ23-12000051

05/15/2024

**All Elevations are referenced to NAVD88**

$$Q = (P - 0.2S)^2 / (P + 0.8S)$$

$$V = Q \times A \text{ (ft/ 12 in)}$$

Q = direct runoff (inches)

P = rainfall (inches)

S = soil storage (inches)

A = site area (acre)

V = Runoff Volume (ac-ft)

**Finished Floor Elevation** $P_{1 \text{ day}} =$  100 year, 24 hour event: 13 (inches) $P_{3 \text{ day}} =$  100 year, 72 hour event: 17.67 (inches)

S = 4.44 (inches)

A = 1.9 (acre)

Q = 13.27 (inches)

V = 2.10 (ac-ft)

Corresponding Stage = 9.75 ft

**Set minimum finished floor elevation at 12.50' NAVD88.****Perimeter Control Elevation** $P_{1 \text{ day}} =$  25 year, 24 hour event: 10.5 (inches) $P_{3 \text{ day}} =$  25 year, 72 hour event: 14.27 (inches)

S = 4.44 (inches) (see "Soil Storage" sheet

A = 1.9 (acre) for calculating "S")

Q = 10.05 (inches)

V = 1.59 (ac-ft)

**Corresponding Stage = 9.50 ft**

**Runoff (Q) & Runoff Volume (V) Calculations**

PZ23-12000051

05/15/2024

All Elevations are referenced to NAVD88

$$Q = (P - 0.2S)^2 / (P + 0.8S)$$

$$V = Q \times A \text{ (ft/ 12 in)}$$

Q = direct runoff (inches)

P = rainfall (inches)

S = soil storage (inches)

A = site area (acre)

V = Runoff Volume (ac-ft)

**5 Year - 1 Hour (Lowest Catch Basin Elevation)** $P_{3 \text{ day}} =$  100 year, 72 hour event: 3.28 (inches)

S= 4.44 (inches)

A= 1.9 (acre)

Q = 0.84 (inches)

V = 0.13 (ac-ft)

Corresponding Stage = 6.50 ft

## Stage Storage

PZ23-12000051

05/15/2024

All Elevations are referenced to NAVD88

Total Surface Storage Area = 1.44 AC

	(1.14 AC) (Lin. 8.25-9.50')	(0.19 AC) (Lin. from 9'-9.55')	(0.11 AC) (From 6.50')		
	<b>Surface Storage</b>	<b>Surface Storage</b>	<b>Surface Storage</b>	<b>Trench Storage</b>	<b>Total</b>
<b>Stage</b>	<b>(Landscape)</b>	<b>(Pavement)</b>	<b>Retention Areas</b>		
8.50 '	0.143 AC-FT	0.000 AC-FT	0.22 AC-FT	0.000 AC-FT	0.36 AC-FT
9.00 '	0.428 AC-FT	0.000 AC-FT	0.50 AC-FT	0.000 AC-FT	0.92 AC-FT
9.50 '	0.713 AC-FT	0.048 AC-FT	0.83 AC-FT	0.000 AC-FT	1.59 AC-FT
10.00 '	1.283 AC-FT	0.138 AC-FT	1.21 AC-FT	0.000 AC-FT	2.63 AC-FT

Project Name:

12 Houses Pompano Beach

Date:

08/10/23

Project Address:

NW 10th Street

Designed by:

Wilford Zephyr, P.E.

ZE Project #: 23-34

Pompano Beach, FL 33060

Pre Development

All Elevations are referenced to NAVD88 vertical datum

## Site Data

Project Area:	1.9 AC	
Pavement Area:	0 AC	
Building Area:	0 AC	
Grass Area (Pervious):	1.9 AC	
Lake Area:	0 AC	
Total Pervious Area:	1.9 AC	100.00%
Total Impervious Area:	0 AC	0.00%

## Design Parameters

Water Table Elevation:	3.50 ft
Exist. Crown of Road Elev.:	10.26 ft
Average Finished Grades:	9.50 ft
Prop. Finished Floor Elev.:	N/A

## C Factor

Pervious:	0.6
Impervious:	0.9

$$\text{C Factor (weighted)} = \frac{1.9 (0.60) + 0 (.90)}{1.9} = 0.6$$

## Storm Event Information

3 year, 1 hour event:	2.5 inches (for retention/detention)
25 year, 24 hour event:	10.50 inches
25 year, 72 hour event:	14.27 inches (Finished Floor Elevation)
100 year, 24 hour event:	13 inches
100 year, 72 hour event:	17.67 inches (Finished Floor Elevation)



**Soil Storage (S) & Curve Number (CN)**

All Elevations are referenced to NAVD88

**Cumulative Water Storage (CWS)**

Design Water Table (WT) = 3.50 ft

Average Finished Grade = 9.50 ft

Average Depth to Water Table (DWT) = 6.00 ft

Cumulative Water Storage (CWS) = 6.75 IN

(from table below)

**Cumulative Soil Moisture Storage (flatwoods soil)**

DWT	NAS	DAS
1.0 '	0.60 "	0.45 "
2.0 '	2.50 "	1.88 "
3.0 '	5.40 "	4.05 "
4.0 '	9.00 "	6.75 "

DWT=Depth to Water Table

NAS=Natural Available Storage

DAS=Developed Available Storage

**Soil Storage (S in inches)**

$S = CWS \times (\text{percentage of total pervious area}) =$

6.75

**Curve Number (CN)**

$CN = 1000 / (S + 10) =$  59.70

**Runoff (Q) & Runoff Volume (V) Calculations**

PZ23-12000051

05/15/2024

All Elevations are referenced to NAVD88

$$Q = (P - 0.2S)^2 / (P + 0.8S)$$

$$V = Q \times A \text{ (ft/ 12 in)}$$

Q = direct runoff (inches)

P = rainfall (inches)

S = soil storage (inches)

A = site area (acre)

V = Runoff Volume (ac-ft)

**Finished Floor Elevation**P<sub>1 day</sub>= 100 year, 24 hour event: 13 (inches)P<sub>3 day</sub>= 100 year, 72 hour event: 17.67 (inches)

S= 6.75 (inches)

A= 1.9 (acre)

Q = 11.54 (inches)

V = 1.83 (ac-ft)

Corresponding Stage = 10.11 ft

**Perimeter Control Elevation**P<sub>1 day</sub>= 25 year, 24 hour event: 10.5 (inches)P<sub>3 day</sub>= 25 year, 72 hour event: 14.27 (inches)

S= 6.75 (inches) (see "Soil Storage" sheet

A= 1.9 (acre) for calculating "S")

Q = 8.49 (inches)

V = 1.34 (ac-ft)

Corresponding Stage = 9.85 ft

## Stage Storage

All Elevations are referenced to NAVD88

Total Surface Storage Area = 1.90 AC

(1.90 AC)

(0.00 AC)

(Lin. 8.80'-9.50')

(Lin. from 0.00'-0.00')

<b>Stage</b>	<b>Surface Storage (Landscape)</b>	<b>Surface Storage (Pavement)</b>	<b>Trench Storage</b>	<b>Total</b>
9.00 '	0.190 AC-FT	0.000 AC-FT	0.000 AC-FT	0.23 AC-FT
9.50 '	0.665 AC-FT	0.000 AC-FT	0.000 AC-FT	0.66 AC-FT
10.00 '	1.615 AC-FT	0.000 AC-FT	0.000 AC-FT	1.62 AC-FT
10.50 '	2.565 AC-FT	0.000 AC-FT	0.000 AC-FT	2.57 AC-FT