COPYRIGHT 2024 GALLO HERBERT ARCHITECTS

"IT IS A VIOLATION OF THE LAW FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF A LICENSED ARCHITECT TO ALTER THESE PLANS AND SPECIFICATIONS." THIS DOCUMENT CONTAINS PROPERTY INFORMATION AND SHALL NOT BE USED OR REPRODUCED, OR ITS CONTENTS DISCLOSED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF GALLO HERBERT ARCHITECTS
CONTRACTOR(S) SHALL VERIFY EXISTING CONDITIONS AND CORRELATE DIMENSIONS PRIOR TO PROVIDING THE WORK DETAILED IN THESE DRAWINGS, AND SHALL PROMPTLY NOTIFY THE DESIGNER OF ANY DISCREPANCIES.

E D C B A
1 2 3 4 5 6

Utilities Structures, Inc.
PO Box 9303
2700 Evans Ave.
Fort Myers, FL. 33901

"Your concrete pole producer since 1988"

usipolea@aol.com
www.utilitiesstructures.com

USI40TIII-11686

Prestressed Concrete Pole

- Pole Weight= 3,280lbs
- Wind speed= 180mph Vult
- Exposure = "C"
- Risk Category II
- Wind Gust = 3 seconds
- 8th Edition 2023 FBC 1620 HVHZ, 1609, 1806
- ASCE 7-22
- Concrete= 7,500lbs @ 28 days
- Grd. Wire= #6 Copper
- Strand= (4) .500" @ 70% Ultimate + (4) .500"
- Tenon= 2.375" x 5" Galv Tenon

MP STRUCTURES
RUTH POWELL, P.E., S.E.

PROJECT:

This pole embedded 10' in to soils with an allowable passive pressure of 300pcf is structurally adequate to resist the local wind speeds Broward Co. with the 3.0sqft epa

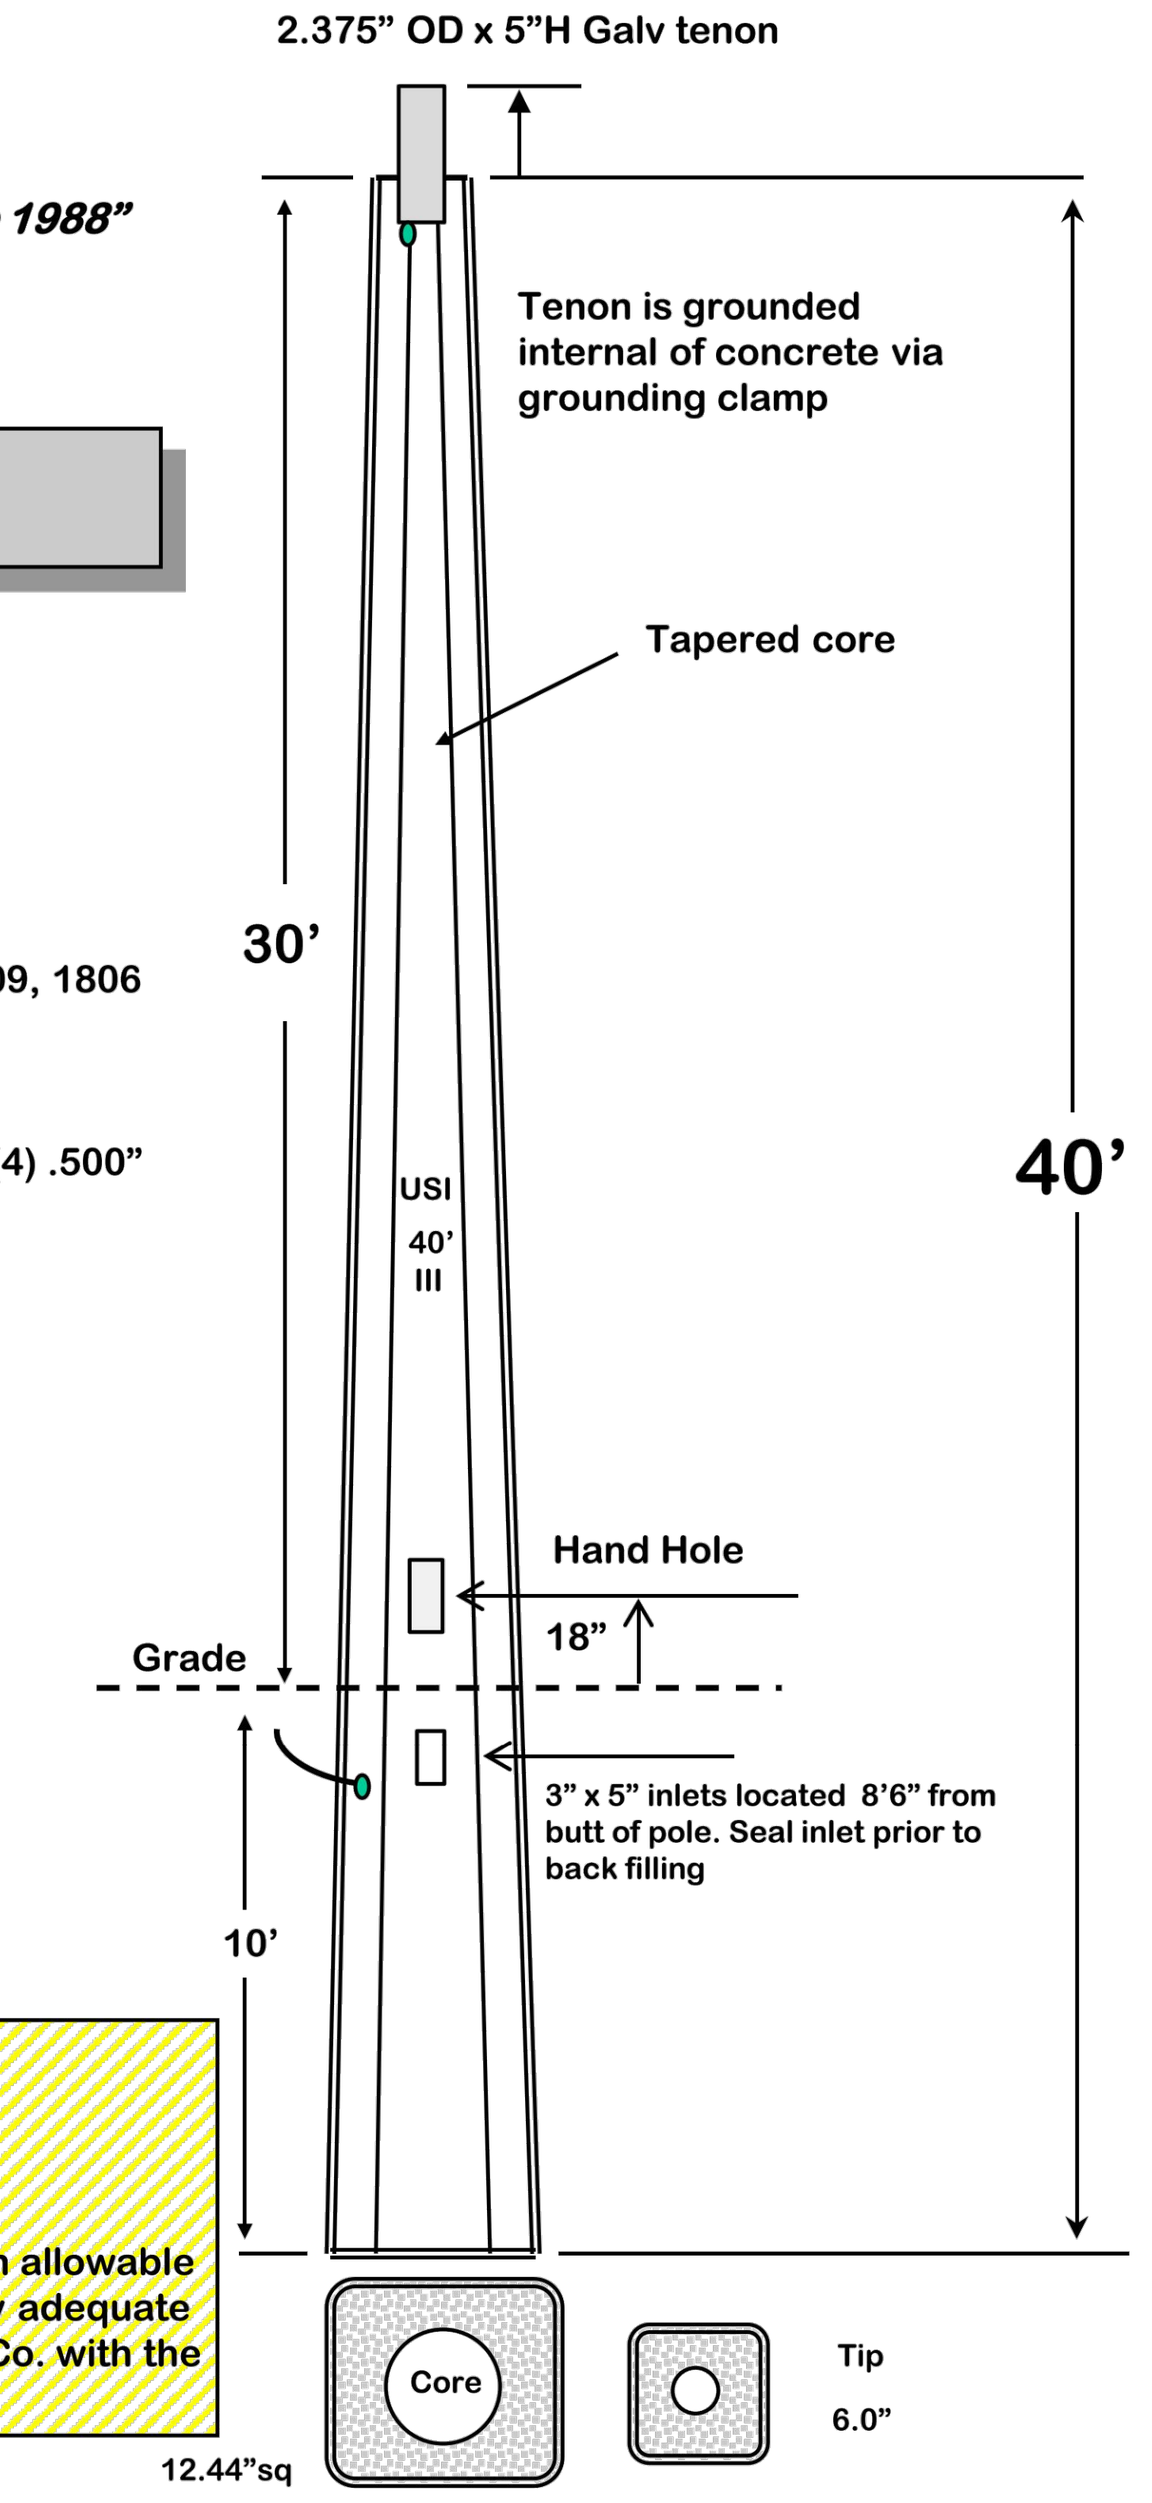

LIGHT POLE LIGHT TYPES SA, SB & SC, SD, SE. SF.

GARDCO

Site and Area
EcoForm
ECF-L large area luminaire

Gardco EcoForm Gen-2 combines economy with performance in an LED area luminaire. Capable of delivering up to 52,500 lumens or more in a compact, low profile LED luminaire, EcoForm offers a new level of customer value. EcoForm features an innovative retrofit arm kit, simplifying site conversions to LED by eliminating the need to drill additional holes in most existing poles. Integral control systems available for further energy savings. Includes Service Tag, our innovative way to provide assistance throughout the life of the product.

Project:
Location:
Cat.No:
Type:
Lamps: Qty:
Notes:

Ordering guide

Example: ECF-L-96L-1A-CW-AR-AFR-90-120-DD-PCB-F1-SP1-TB-RPA-HIS-BK

Prefix	Number of LEDs	Drive Current	LED Color - Generation	Mounting	Distribution	Voltage
ECF-L						
ECF-L EcoForm site and area, large	80L 80 LEDs (5 modules)	900 900mA; 1A 1050mA; 1.2A 1200mA	WW-G2 Warm White 3000K, 70CRI Generation 2	AR[2] Arm Mount (standard)	Type 2: 2 Type 2; 2-90 Rotated left 90°; 2-270 Rotated right 270°	120 120V; 208 208V; 240 240V; 277 277V; 347 347V; 480 480V; UNV 120-277V (50/60Hz); HVU 347-480V (50/60Hz)
	96 96 LEDs (6 modules)	800 800mA; 1A 1050mA; 1.2A 1200mA; 1.4A[19] 1400mA	NW-G2 Neutral White 4000K, 70CRI Generation 2; CW-G2 Cool White 5000K, 70CRI Generation 2	The following mounting kits must be ordered separately (See accessories); SF[3] Slip Fitter Mount (fits to 2 3/8" O.D. tenon); WS Wall mount with surface conduit rear entry permitted; RAM[2] Retrofit arm mount kit	Type 3: 3 Type 3; 3-90 Rotated left 90°; 3-270 Rotated right 270°; Type 4: 4 Type 4; 4-90 Rotated left 90°; 4-270 Rotated right 270°; Type 5: 5 Type 5; 5W Type 5W; AFR Auto Front Row; AFR-90 Auto Front Row, Rotated left 90°; AFR-270 Auto Front Row, Rotated right 270°; BLC Back Light Control; BLC-90 Back Light Control rotated at 90°; BLC-270 Back Light Control rotated at 270°; LCL[19] LEED Corner Optic Left; RCL[19] LEED Corner Optic Right	

Options

Dimming controls	Motion sensing lens	Photo-sensing	Options	Luminaire	Finish
DD[4,18] 0-10V External dimming (for controls by others); DCC[4,5,6,18] Dual Circuit Control; FAWS[4,5,18] Field Adjustable Wattage Selector; SRDR[4,5,6,8,17] SR driver connected to Zhaga socket; DynaDimmer: Automatic Profile Dimming: CS50[4,8] Safety 50% Dimming, 7 hours; CM50[4,8] Median 50% Dimming, 8 hours; CS30[4,8] Safety 30% Dimming, 7 hours; CM30[4,8] Median 30% Dimming, 8 hours		PCB[8,9] Photocontrol Button; TLRD5[10,17] Twist Lock Receptacle 5 Pin; TLRD7[10,17] Twist Lock Receptacle 7 Pin; TLRPC[9,10,11,17] Twist Lock Receptacle w/Photocell	Fusing: F1[9] Single (120, 277, 347VAC); F2[9] Double (208, 240, 480VAC); Pole Mount Fusing: FP1[9] Single (120, 277, 347VAC); FP2[9] Double (208, 240, 480VAC); FP3[9] Canadian Double Pull (208, 240, 480VAC); Surge Protection (10kA standard): SP2 Increased 20kA; BAC[20,21] Meets the requirements of the Buy American Act of 1933 (BAA)	Square Pole Adapter included in standard product; TB[12] Terminal Block; RPA[13] Round Pole Adapter (fits to 3"- 3.9" O.D. pole); HIS[14] Internal House Side Shield	Textured: BK Black; WH White; BZ Bronze; DGY Dark Gray; MGY Medium Gray; Customer specified: RAL Specify optional color or RAL (ex: RAL7024); CC Custom color (Must supply color chip for required factory quote)
BL[1,4,7,18] Bi-level functionality	IMRI3[15] Integral with #3 lens; IMRI7[15] Integral with #7 lens				
WIAP[4,6,16] Wireless Interact (includes SR driver and SR receptacle - do NOT select SRDR)	LB Low (7'-15' mounting height) sensor, Black color housing Wireless Interact, integral; LW Low (7'-15' mounting height) sensor, White color housing; HB High (15'-40' mounting height) sensor, Black color housing; HW High (15'-40' mounting height) sensor, White color housing				

1. BL-IMRI3/7 equipped with out-boarded sensor housing when voltage is HVU (347-480V).
2. Mounts to a 4" round pole with adapter included for square poles.
3. Limited to a maximum of 45 degrees aiming above horizontal.
4. Not available with other dimming control options.
5. Not available with motion sensor.
6. Not available with photocontrol.
7. BL must be combined with Motion sensing lens IMRI3 or IMRI7.
8. Not available in 347 or 480V.
9. Must specify input voltage.
10. TLRD5, TLRD7 and TLRPC receptacle pins 4 & 5 are capped off when ordered with any of the Dimming controls DD or FAWS or LLC.
11. Not available in 480V. Order photocell separately with TLRD5/7.
12. Not available with DCC.
13. Not available with SF and WS. RPAs provided with black finish standard.
14. HIS not available with Type 5, 5W, BLC, BLC-90, BLC-270, LCL or RCL optics.
15. Not available with DD, DCC, FAWS, SRDR, or WIAP dimming control options.
16. WIAP must be combined with Motion sensing lens LB or LW or HB or HW.
17. When ordering SRDR, controller (by others) to be used on socket must be SR compatible (See specifications for more details). Consult factory for lead time. All 7 pins in NEMA receptacle are connected to SR driver. SRDR not available with TLRD5 or TLRPC.
18. 0-10V dimming driver standard.
19. 120V or 277V only, not available with SRDR or any DynaDimmer options or WIAP (due to driver limitations).
20. Extended lead times apply. Contact factory for details.
21. Failure to properly select the "BAC" suffix could result in you receiving product that is not BAA compliant product with no recourse for an RMA or refund. This BAC designation hereunder does not address (i) the applicability of, or availability of a waiver under, the Trade Agreements Act, or (ii) the "Buy America" domestic content requirements imposed on states, localities, and other non-federal entities as a condition of receiving funds administered by the Department of Transportation or other federal agencies.

DARKSKY APPROVED Reduces light pollution Certified by DarkSky.org · DLC LISTED PREMIUM · DLC LISTED · c UL us

DRC
interact
PZ23-12000032
07/01/2026

LIGHT CUT SHEETS

GARDCO

Wall Mount
GeoForm
GWM LED wall sconce

Gardco GeoForm wedge medium LED wall sconce features a geometric wedge shape that will complement a range of architectural styles. GeoForm wedge medium features specialized, highly efficient precision plus optics which balance low glare with excellent performance. Type 2, 3 and 4 optical distributions are available. Emergency battery backup option provides path-of-egress illumination. Multiple control options, including wireless Interact Pro outdoor, further enhance energy savings. Multiple control options, including wireless Interact Pro outdoor, further enhance energy savings.

Project:
Location:
Cat.No:
Type:
Lamps: Qty:
Notes:

Ordering guide

example: GWM-A07-840-T3M-UNV-FAWS-DG

Luminaire	Configuration (nom. lumens)	Color Temperature	Distribution	Voltage	Dimming Controls[2]	Electrical	Options	Finish
GWM								
GWM GeoForm Wedge Medium	A06 2,500 lumens; A07 4,000 lumens; A08 5,000 lumens; A09 6,000 lumens; A10[1] 7,500 lumens; A11[1] 8,500 lumens; A12[1] 9,500 lumens; A13[1] 11,000 lumens; A14[1] 12,500 lumens	830 80CRI 3000K; 840 80CRI 4000K; 740 70CRI 4000K; 750 70CRI 5000K	T2M Type 2; T3M Type 3; T4M Type 4	120 120V; 208 208V; 240 240V; 277 277V; UNV 120-277V (50/60Hz); 347 347V; 480 480V; HVU 347-480V (50/60Hz)	none Leave blank (10kV kA dimming driver standard); DLEA[2] Dimming Leads Externally Accessible (controls by others); DUCC[1,2] Dual Circuit Control (Only available with A06-A09); FAWS[2] Field Adjustable Wattage Selector; MW30[1,2,3] Microwave motion sensor factory set at 30% dimming; DynaDimmer: Automatic Profile Dimming Only offered with A08-A13: CS50[1,2,4] Safety 50% dimming, 7 hours; CM50[1,2,4] Median 50% dimming, 8 hours; CS30[1,2,4] Safety 30% dimming, 7 hours; CM30[1,2,4] Median 30% dimming, 8 hours	none Leave blank (10kV/kA standard); SP2 Surge protector 20kV/10kA (option); FS1 Single fuse (120, 277, or 347VAC); FS2 Double fuse (208V, 240V, or 480V); FS3 Double fuse Canadian double pull (208V, 240V, or 480V); PCB[5] Photocontrol Button	none Leave blank; EC Emergency battery pack, cold rated (-20°C to 40°C). 120 or 277V only.; BAC[6] Meets the requirements of the Buy American Act of 1933 (BAA)	Textured: BK Black; WH White; BZ Bronze; DG Dark Gray; MG Medium Gray; Customer specified: RAL Specify optional color or RAL, (ex: OC-LGP or OC-RAL7024); CC Custom Color (must supply color chip, requires factory quote)

1. Emergency Battery Pack not available.
2. Only one option can be selected from Dimming Controls column.
3. Not available in 480V.
4. Only available from 120- 277V, or in UNV.
5. Only available from 120-277V, must specify voltage.
6. Failure to properly select the "BAC" suffix could result in you receiving product that is not BAA compliant product with no recourse for an RMA or refund. This BAC designation hereunder does not address (i) the applicability of, or availability of a waiver under, the Trade Agreements Act, or (ii) the "Buy America" domestic content requirements imposed on states, localities, and other non-federal entities as a condition of receiving funds administered by the Department of Transportation or other federal agencies.
7. Consult Signify to confirm whether specific accessories are BAA-compliant.

Luminaire Accessories (order separately)[7]

GF-WS-BK	Wall Mounted Box for surface conduit, painted black
GF-INV	Inversion Mounting kit (required with inverted mounting)

DARKSKY APPROVED Reduces light pollution Certified by DarkSky.org · DLC LISTED PREMIUM · c UL us

GHA
GALLO HERBERT ARCHITECTS
1311 W NEWPORT CENTER DRIVE DEERFIELD BEACH, FLORIDA 33442 PH. 954.794.0300 FX. 954.794.0301

AA26001731

SEAL

☐ WILLIAM J. GALLO FL AR0008440

Brian Herbert Digitally signed by Brian Herbert Date: 2026.05.21 17:21:56 -04'00'

☐ BRIAN P. HERBERT FL AR0015474

PROJECT

BONSAL TURN LANE
1200 NW 18TH ST
POMPANO BEACH FL 33069

OWNER

OLDCASTLE APG

REVISIONS

No.	Description	Date
	MINOR SITE SBMTL	07-19-2023
	MINOR SITE SBMTL	06-25-2024
	MINOR SITE SBMTL	09-30-2024
	DRC RESUBMIT	05-21-2026

PROJECT STATUS
MINOR SITE PLAN SUBMITTAL

DATE

PROJECT NUMBER
2123

SCALE
AS SHOWN

DRAWN BY / CHECKED BY
JET

DRAWING TITLE
SITE LIGHTING PHOTOMETRIC PLAN

DRAWING NUMBER
SL-1