


DRC

PZ24-12000019  
02/05/2025

PZ24-12000019  
02/05/2025

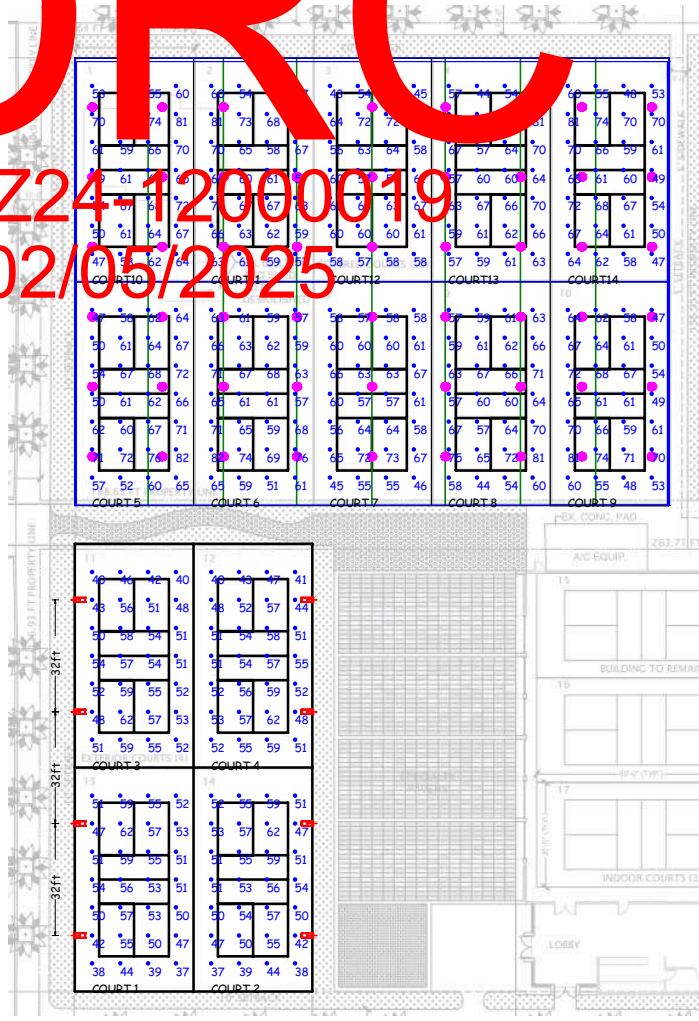

Luminaire Schedule								
Project: POMPANO PICKLE								
Symbol	Qty	Label	Arrangement	Description	LLF	Luminaire Lumens	Luminaire Watts	Total Watts
	8	A	Single	ZNL-78L-CT-50 (ZONE LARGE) @ 22' MTG. HT.	0.940	77488	648	5184
	54	B	Single	ARB-1-L5-30L-840-R16AW @ 2' SUSPENSION	0.940	28363	239.5	12933

Calculation Summary					
Project: POMPANO PICKLE					
Label	CalcType	Avg	Max	Min	Max/Min
COURT 1	Illuminance	51.00	62	37	1.68
COURT 2	Illuminance	51.04	62	37	1.68
COURT 3	Illuminance	51.79	62	40	1.55
COURT 4	Illuminance	52.11	62	40	1.55
COURT 5	Illuminance	63.14	82	47	1.74
COURT 6	Illuminance	64.39	82	51	1.61
COURT 7	Illuminance	60.21	73	45	1.62
COURT 8	Illuminance	62.96	81	44	1.84
COURT 9	Illuminance	62.07	81	47	1.72
COURT10	Illuminance	62.07	81	47	1.72
COURT11	Illuminance	63.36	81	46	1.76
COURT12	Illuminance	29.96	72	43	1.67
COURT13	Illuminance	62.86	81	44	1.84
COURT14	Illuminance	62.00	81	47	1.72

The light levels shown are maintained using a .94 light loss factor (LLF). Light loss factors are used to adjust the light output of a luminaire operating in a controlled laboratory environment to the output obtained under actual field conditions. The LLF used in these calculations includes both recoverable and non-recoverable factors. Recoverable factors include luminaire dirt depreciation (LDD). Non-recoverable factors include optical system variations, and depreciation in initial luminaire lumen output. The use of the light loss factor shown requires making certain assumptions about the lighting system, the specific application, and the maintenance of the system over time. Therefore, actual light levels measured in the field may vary from the calculated values, especially in regards to individual location measurements.

Calculations use a LED Maintained Lamp Lumen factor based upon 50,000 hours of life, derived from IES TM21-11, and based upon an In-situ case temperature of 55°C.

Based on the information provided, all dimensions and luminaire locations shown represent recommended positions. The engineer and / or architect must determine applicability of the layout to existing or future field conditions.

Filename: POMPANO PICKLE2.AGI  
Date:9/5/2024



ZONE Large - Sport/Court Light (ZNL)



Advantage Round High Bay (ARB)

Project: Pompano Pickle  
Location: Pompano Beach, FL

Frasure Reps  
3343 Lookout Drive  
Cincinnati, OH 45208  
Phone: 513-666-4242  
Email: patrick@frasurereps.com

