
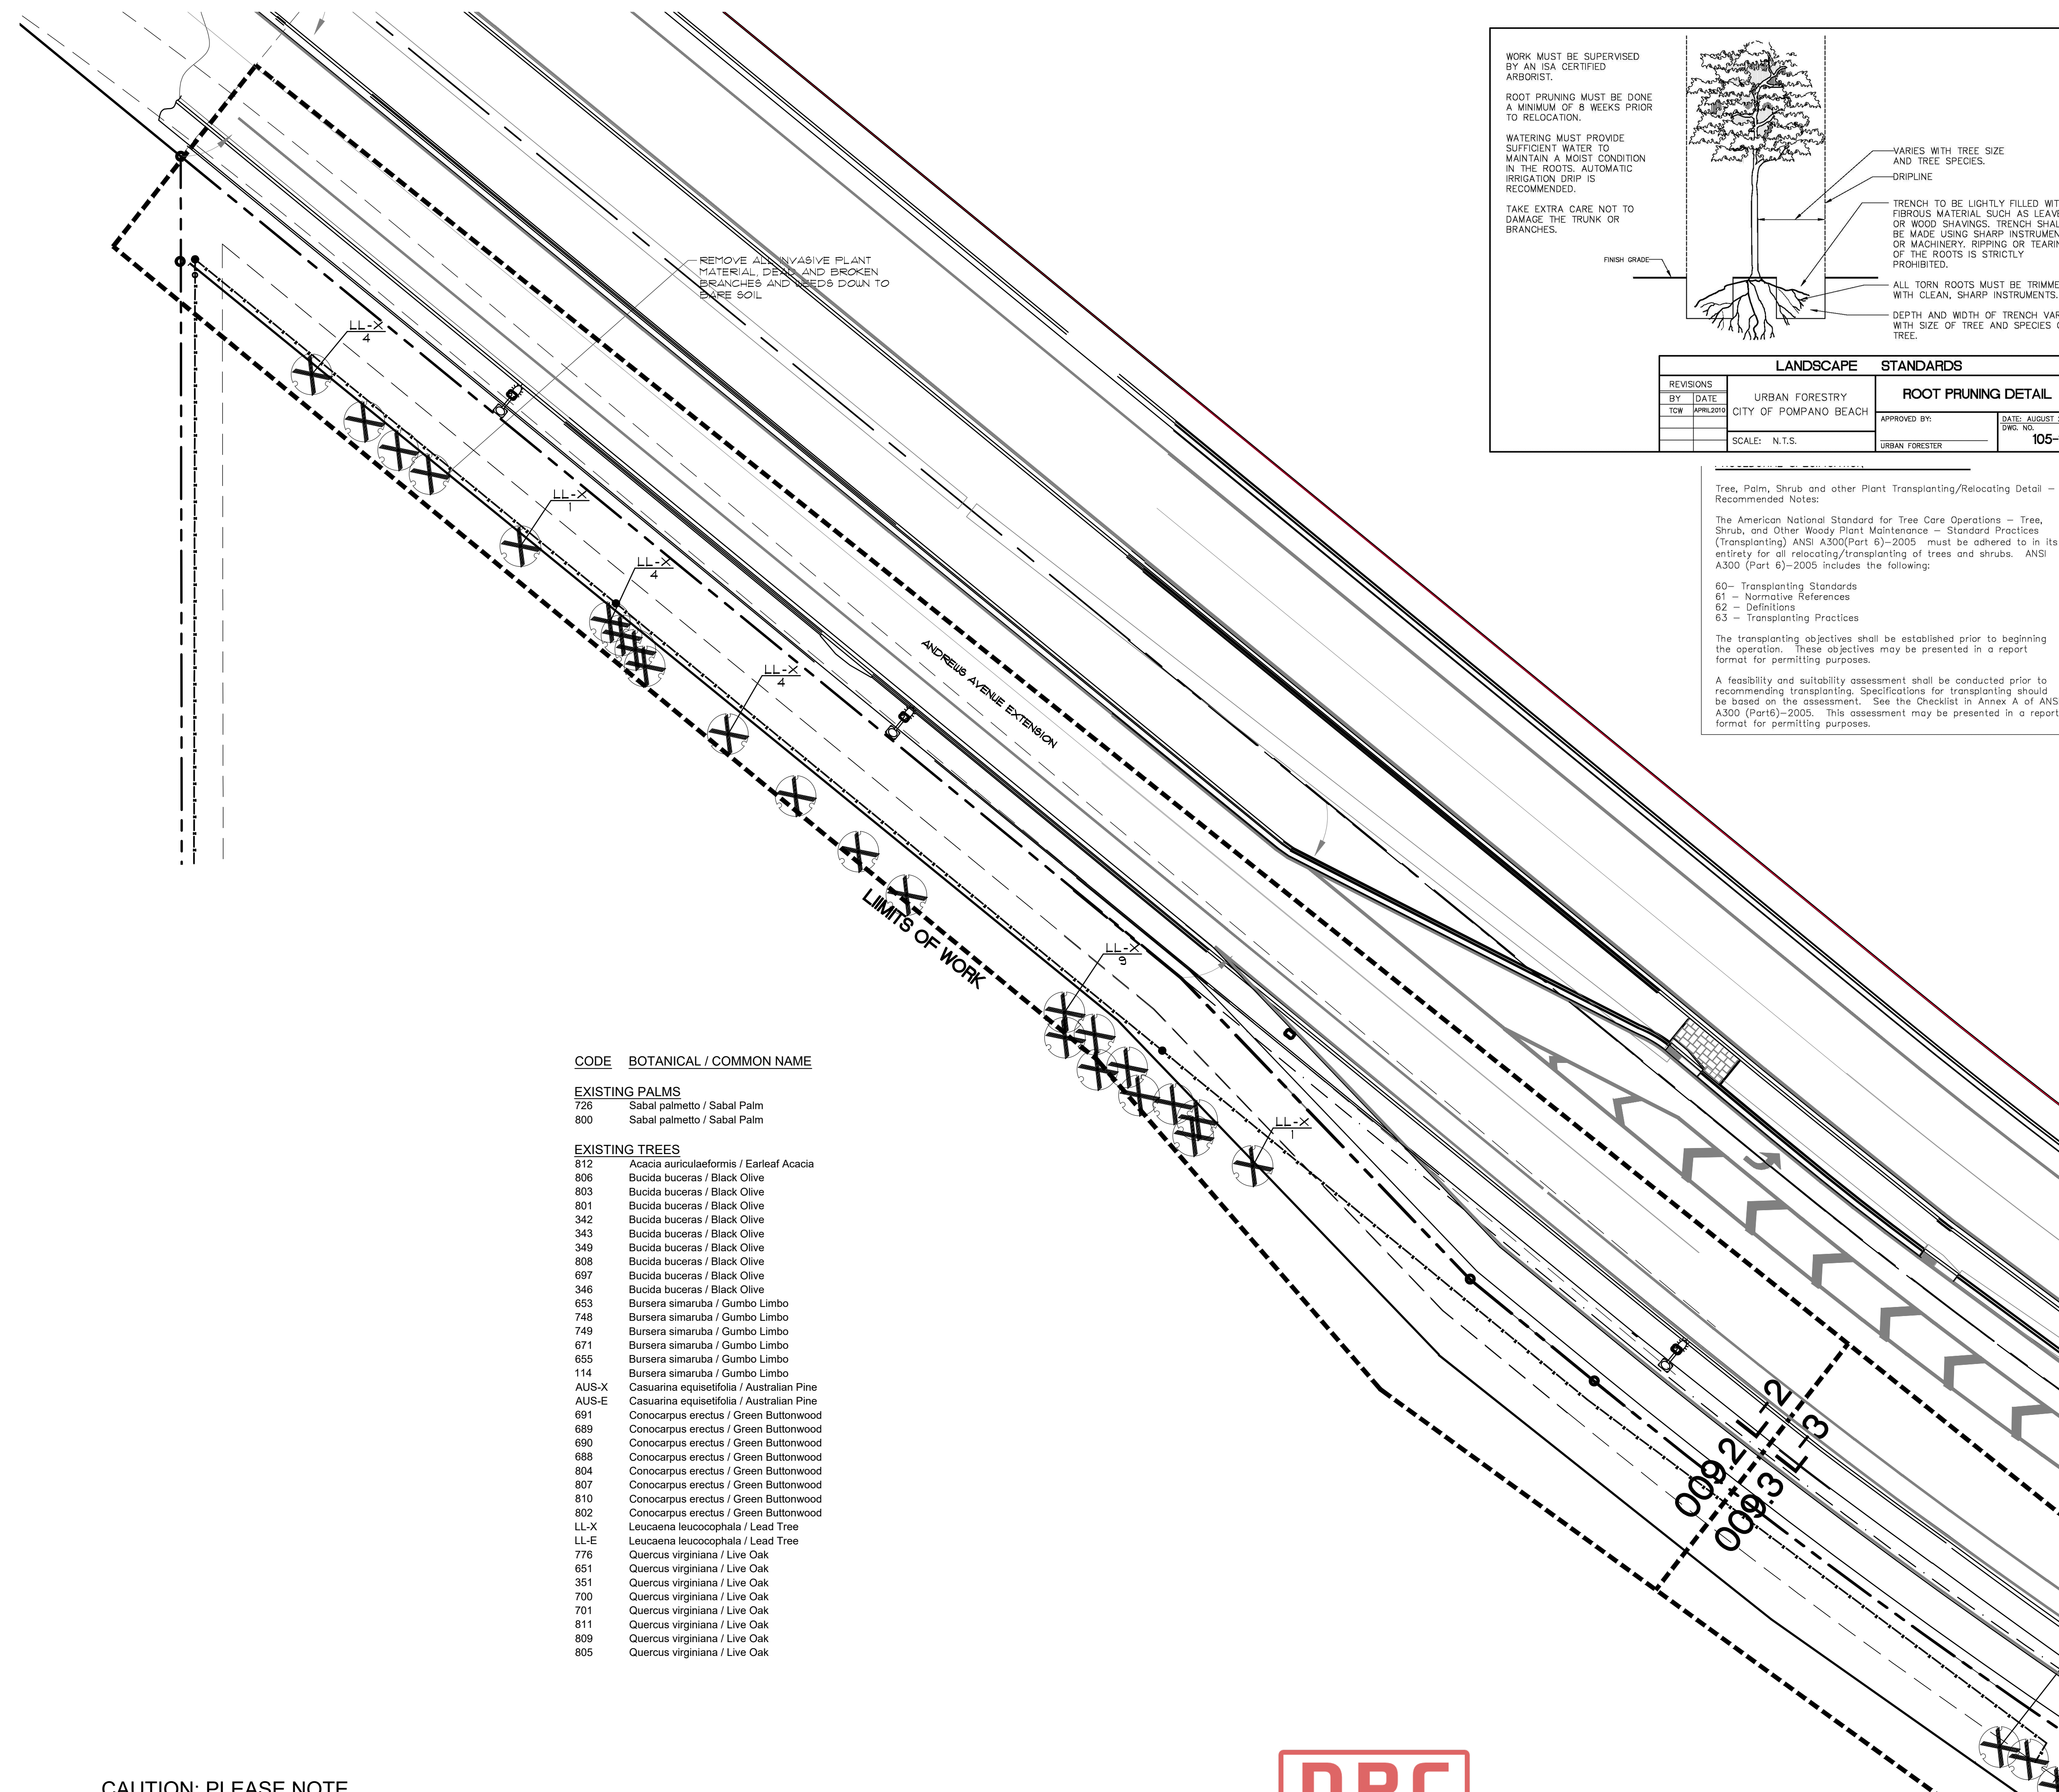


Tree, Palm, Shrub and other Plant Transplanting/Relocating Detail - Recommended Notes:
The American National Standard for Tree Care Operations - Tree, Shrub, and Other Woody Plant Maintenance - Standard Practices (Transplanting) ANSI A300(Part 6)-2005 must be adhered to in its entirety for all relocating/transplanting of trees and shrubs. ANSI A300 (Part 6)-2005 includes the following:
60 - Transplanting Standards
61 - Normative References
62 - Definitions
63 - Transplanting Practices
The transplanting objectives shall be established prior to beginning the operation. These objectives may be presented in a report format for permitting purposes.
A feasibility and suitability assessment shall be conducted prior to recommending transplanting. Specifications for transplanting should be based on the assessment. See the Checklist in Annex A of ANSI A300 (Part 6)-2005. This assessment may be presented in a report format for permitting purposes.

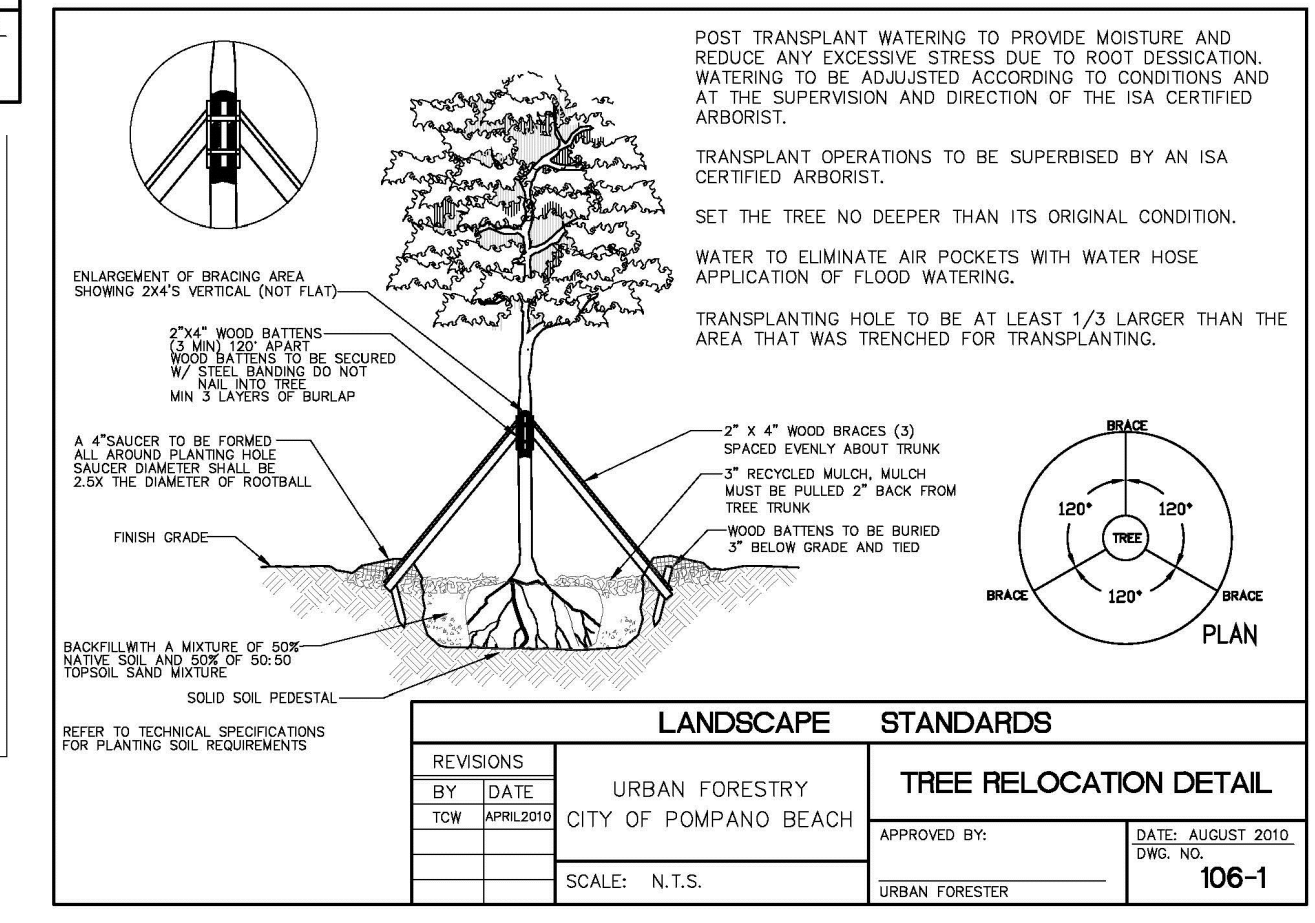

CODE BOTANICAL / COMMON NAME

EXISTING PALMS
726 Sabal palmetto / Sabal Palm
800 Sabal palmetto / Sabal Palm

EXISTING TREES
812 Acacia auriculaeformis / Earleaf Acacia
806 Bucida buceras / Black Olive
803 Bucida buceras / Black Olive
801 Bucida buceras / Black Olive
342 Bucida buceras / Black Olive
343 Bucida buceras / Black Olive
349 Bucida buceras / Black Olive
808 Bucida buceras / Black Olive
697 Bucida buceras / Black Olive
346 Bucida buceras / Black Olive
653 Bursera simaruba / Gumbo Limbo
748 Bursera simaruba / Gumbo Limbo
749 Bursera simaruba / Gumbo Limbo
671 Bursera simaruba / Gumbo Limbo
655 Bursera simaruba / Gumbo Limbo
114 Bursera simaruba / Gumbo Limbo
AUS-X Casuarina equisetifolia / Australian Pine
AUS-E Casuarina equisetifolia / Australian Pine
691 Conocarpus erectus / Green Buttonwood
689 Conocarpus erectus / Green Buttonwood
690 Conocarpus erectus / Green Buttonwood
688 Conocarpus erectus / Green Buttonwood
804 Conocarpus erectus / Green Buttonwood
807 Conocarpus erectus / Green Buttonwood
810 Conocarpus erectus / Green Buttonwood
802 Conocarpus erectus / Green Buttonwood
LL-X Leucaena leucocophala / Lead Tree
LL-E Leucaena leucocophala / Lead Tree
776 Quercus virginiana / Live Oak
651 Quercus virginiana / Live Oak
351 Quercus virginiana / Live Oak
700 Quercus virginiana / Live Oak
701 Quercus virginiana / Live Oak
811 Quercus virginiana / Live Oak
809 Quercus virginiana / Live Oak
805 Quercus virginiana / Live Oak

- NOTES:
- PER CITY ORDINANCE(S) 50.02(A)(4) AND 100.35(E), STREET TREES SHALL NOT BE PLACED ON TOP OF OR 5'-0" ON EITHER SIDE OF ANY CITY OWNED UTILITY INFRASTRUCTURE.
 - NO TREES, SHRUBBERY OR OBSTRUCTION SHALL BE PLACED WITHIN A 3'-0" RADIUS OF A CITY OWNED SEWER LATERAL CLEANOUT OR WATER 4/OR REUSE METER.
 - A PRE-CONSTRUCTION MEETING WITH CITY OF POMPANO BEACH, URBAN FORESTRY, IS REQUIRED BEFORE ANY PLANT MATERIAL IS INSTALLED ON SITE.
 - ALL ROAD ROCK, CONCRETE, ASPHALT AND OTHER NOT NATURAL MATERIALS SHALL BE REMOVED FROM PLANTING AREAS PRIOR TO LANDSCAPE INSTALLATION.
 - ALL TREE WORK WILL REQUIRE PERMITTING BY A REGISTERED BROWARD COUNTY TREE TRIMMER.
 - ALL TREES DESIGNATED AS SINGLE TRUNK SHALL HAVE A SINGLE, RELATIVELY STRAIGHT, DOMINANT LEADER. PROPER STRUCTURAL BRANCHING AND EVEN BRANCH DISTRIBUTION. TREES WITH BARK INCLUSION TIPPED BRANCHES, AND CO-DOMINANT TRUNKS WILL NOT BE ACCEPTED. TREES WITH GIRDLING, INTACT LEADER CIRCLING AND OR PLUNGING ROOTS WILL BE REJECTED.
 - ALL EXISTING TREES WILL BE PRUNED BY AN ISA CERTIFIED ARBORIST UNDER THE DIRECTION OF A BCMA OR ASCA REGISTERED CONSULTING ARBORIST.

Bonsai Turn Lane
1200 NW 18th St.
Pompano Beach, FL 33069

02/11/26 City Comments
12/11/24 City Comments
09/26/24 City Comments
09/11/24 City Comments
ISSUE HISTORY
PROJ NO: 23034A
PROJ MGR: DC
DRAWN BY: DC
CHECKED BY: KWLD

DRAWING TITLE:
Existing Landscape Plan
SHEET:
009.2 L-2

CAUTION: PLEASE NOTE
Contractor shall secure all permits required for the work from any state or local departments, utility companies or jurisdiction affected by the work. The Contractor shall have permits "in hand" prior to starting work. The Landscape Architect and/or Owner shall bear no responsibility for work performed without permitted drawings. The Contractor shall be responsible for all changes to work, at no additional cost to Owner, as a result of unauthorized work prior to receipt of permit.

DRC
PZ23-12000032
07/01/2026

SUBMISSION
05/20/26
NOT FOR CONSTRUCTION

0 10 20 30 40 50
SCALE 1" = 20' 0"

NORTH