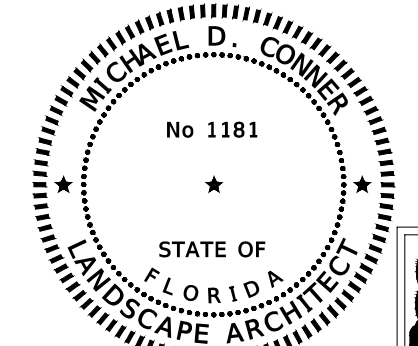


IRRIGATION SCHEDULE

SYMBOL	MANUFACTURER/MODEL	QTY	ARC	GPM	RADIUS
	Rain Bird 1806-SAM-PRS 08H	2	180	0.52	8'
	Rain Bird 1806-SAM-PRS 10H	5	180	0.79	10'
	Rain Bird 1806-SAM-PRS 10Q	1	90	0.39	10'
	Rain Bird 1806-SAM-PRS 12H	3	180	1.3	12'
	Rain Bird 1806-SAM-PRS 12T	1	120	0.87	12'
	Rain Bird 1806-SAM-PRS 15H	4	180	1.85	15'
	Rain Bird 1806-SAM-PRS 15Q	3	90	0.92	15'
	Rain Bird 1806-SAM-PRS 08V	1	Adj	≤ 2.88	8'
	Rain Bird 1806-SAM-PRS 15V	2	Adj	≤ 3.67	15'
	Rain Bird 1812-SAM-PRS SQ-2HLF	1	180	0.2	2.5x5'
	Rain Bird 1812-SAM-PRS 08Q	1	90	0.26	8'
	Rain Bird 1812-SAM-PRS 10H	3	180	0.79	10'
	Rain Bird 1812-SAM-PRS 12H	2	180	1.3	12'
	Rain Bird 1812-SAM-PRS 12Q	1	90	0.65	12'
	Rain Bird 1812-SAM-PRS 15H	3	180	1.85	15'
	Rain Bird 1800-1300AF Flood F	96	360	1.4	3'
SYMBOL	MANUFACTURER/MODEL	QTY			
	Rain Bird 5006-PL-PC-SAM-R-MPR 25	19			
	Rain Bird 5006-PL-PC-SAM-R-MPR 30	22			
	Rain Bird 5006-PL-PC-SAM-R-MPR 35	1			
	Rain Bird 5012-PL-PC-SAM-R-MPR 25	15			
	Rain Bird 5012-PL-PC-SAM-R-MPR 30	4			
	Rain Bird 5012-PL-PC-SAM-R-MPR 35	2			
SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY			
	Rain Bird P68B 1in., 1-1/2in., 2in., 3in., 3in. Plastic Industrial Remote Control Valve. Low Flow Operating Capability, Globe Configuration. With Scrubber Technology for Reliable Performance in Dirty Water Irrigation Applications.	7			
	Rain Bird 44-LRC 1in. Brass Quick-Coupling Valve, with Corrosion-Resistant Stainless Steel Spring, Locking Thermoplastic Rubber Cover, and 2-Piece Body.	2			
	Rain Bird ESP4ME3 with (1) ESP-SM3 7 Station, Hybrid Modular Outdoor Controller. For Residential or Light Commercial Use. LNK WiFi Module and Flow Sensor Ready.	1			
	Rain Bird RSD-CEX Rain Sensing Device, conduit mount. With threaded adapter, extension wire.	1			
	NEW 3 HP PUMP & WELL New Pump Station capable of providing a minimum of 45 GPM @ 48 PSI with Rust Inhibitor System.	1			
	Irrigation Lateral Line: PVC Class 200 SDR 21	2,914 lf			
	Irrigation Mainline: PVC Schedule 40	246.3 lf			
	Pipe Sleeve: PVC Schedule 40	285.3 lf			
Valve Callout		Sleeve Callout			
	Valve Number	(2) 2" SLVS (M/W/L/S)			
	Valve Flow	CASED PIPE TYPE: M = MAIN LINE W = WIRES L = LATERAL LINE S = SPARE (EMPTY)			
	Valve Size	SLEEVE ABBREVIATION: SLV = SINGLE SLEEVE SLVS = MULTIPLE SLEEVES			
		INSIDE DIAMETER OF SLEEVE PIPE			
		QUANTITY OF SLEEVES			

MINOR SITE PLAN SUBMITTAL
ELEVATIONS SHOWN ARE NAVD 88

1	NO	DATE	REVISION	BY	NO	DATE	REVISION	BY
1	10/03/25	REVISED PLANS DUE TO CHANGES IN TANK ELEV.	M.D.C.					

Calvin, Giordano & Associates, Inc.
A SAFEHILL COMPANY
580 Village Blvd., Suite 325, West Palm Beach, FL 33409
Phone: 561.694.6161 • Fax: 561.694.6160

BLOSSMAN GAS COMPANY
261 S. ANDREWS AVENUE
POMPAÑO BEACH, FL 33069

IRRIGATION PLAN & SCHEDULE

MICHAEL CONNER, STATE OF FLORIDA REGISTERED LANDSCAPE ARCHITECT,
LICENSE NO. 1181.
THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY MICHAEL CONNER, R.L.A.
ON THE DATE INDICATED HERE.
PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED
AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.
DATE: 10/02/2025

SCALE
AS SHOWN
PROJECT NO.
23-7806

SHEET
IR-2