

PUBLIC SAFETY SECURITY (CPTED) NOTES

PZ25- 12000013

12/03/2025

PRINCIPLE #1 - NATURAL SURVEILLANCE (See and Be Seen)

- Site has been arranged with numerous light poles, wall packs, task lighting at Vacuum arches and tiered landscaping so that patrons can always maintain visibility of their surroundings.
- Lighting must comply with the Illuminating Engineering Society of North America “IESNA” G-1- 2022 “Guide for Security Lighting for People, Property, and Critical Infrastructure.
- Public parking spaces are naturally surveilled by building windows of
- Public parking spaces are naturally surveilled by visitors and public activity
- 180-degree wide angle peephole door viewers are included in all doors
- Install vandal proof/ resistant motion-sensor security alert lights over all exterior unit doors and overhangs, including main and storage doors. Security lighting should be primarily concentrated at gateways, doorways & windows.
- Use carefully-focused bright soft lights with shielded fixtures
- Bottom gate clearance for dumpster must be 8 inches above the ground.
- Maintain 2- to 2.5-foot maximum height for all hedges, bushes, low plants, and ground cover.
- Designated ADA access ramps are to utilize see through fence railing for improved natural surveillance.
- All solid exterior doors must have a see-through reinforced security window, or an audible/ video intercom pager system including service doors, garage, or bay doors.

PRINCIPLE #4 -MAINTENANCE (Broken Window Theory)

- Impact glass is used for all exterior windows.
- All areas will be maintained to high standards, including entrances, signage, swales, and parking areas. Trash will be removed and landscaping will be maintained.
- Trees and shrubs will be pruned away from windows, doors, and walkways.
- Exterior lighting will be maintained in full function at all times.
- Rules will be strictly enforced regarding junk vehicles, inappropriate outdoor storage, and dumping.
- Exterior wall surfaces along the building perimeter must be treated with a graffiti resistant resin up to 8 feet to prevent vandalism.
- All publicly accessible exterior electrical power outlets have a lockable metal cover AND easily accessible secure internal cutoff switch.
- Ensure all publicly accessible exterior water outlet spigots have a nearby easily accessible secure locking cap.
- Costly equipment such as ground floor exterior air conditioning units (if any) must be clearly and permanently marked with serial numbers and images of equipment and serial numbers stored for criminal investigation.

PRINCIPLE #2 - ACCESS CONTROL

- Install hard-wired burglar security alarms and safes, and/ or wherever valuables of any kind are stored.
- Include a robust locking mechanism such as a throw bolt with a robust shielded padlock, rather than only a vulnerable chain and non-shielded padlock for dumpster enclosure.
- Perimeter estate fence is proposed along east & south property lines to direct pedestrian to single point of entry toward the west side.
- Building has been placed along northern property line to eliminate pedestrian traffic from north and promote access from west side only.
- Entrances to the site are designed to be defined with paving changes, landscape, and signage
- Low hedges and shrubs are to be maintained at a maximum height of 2.5 feet in front of buildings
- Lighting will be installed and maintained to avoid obstruction by landscaping, fencing, and other site elements.
- Maintain an 8-foot clearance for canopy trees and tall plants without any obstructive limbs or foliage hanging down below 8 feet that would in the present or future obstruct Natural &/ or Electronic Surveillance.
- Lighting locations will avoid shrub and tree shading
- Landscaping around site edges is designed to avoid conflict with natural surveillance from public streets or any buildings
- Security and Access Control System will be installed at building entrances (<https://www.eyeson.biz/site/>)
- Wayfinding & Instructional Signage must be prominently displayed & posted where necessary
- All exterior doors must have non-removable door hinge pins
- Include anti-pry robust security bar device (Charlie Bar) on any sliding glass doors
- Areas designated for employee & customer transactions such as a reception desk, should be designed with a clear boundary delineation and/or enclosure separating public from private areas.
- Any keys, key fobs, key card devices &/or similar devices that are stored on-site must be secured with access control
- Trash room is located in an area properly lit, and covered by both natural and electronic surveillance.
- Key security office / room / key storage closet door must have an alarm and robust mechanical locking system
- Areas designated for employee & customer transactions such as a reception desk, counter tops, podium, &/or bar must be designed with a clear boundary delineation &/or enclosure separating public from private areas.
- Fences should not have easily accessible horizontal bars that could be used to facilitate climbing over & breaching any security fencing. Use narrow spacing between vertical bars to prevent providing footholds.

PRINCIPLE #5 - ACTIVITY SUPPORT


- Sidewalk placement is adjacent to public parking, which increases activity along most of the project perimeters
- Open spaces and vacuuming areas are centrally-located, promoting visibility.
- Bike racks are located close to the main building access doors.

PRINCIPLE #3 - TERRITORIAL REINFORCEMENT (Sphere of Influence)

- South & East property lined shall be secured by means of an 6-foot-high picket fence to prevent through traffic and pedestrian loitering during non-operational hours.
- Main entrances to parking areas are delineated by different pavement treatment, signage and striping.
- Property will subscribe to the Broward Sherriff's No Trespass Program. Refer to CPTED Plan for signage locations · Post BSO No Trespass signs prominently with bottom edge of sign at approximately a minimum of 6' to 7' feet in height from ground level for clear unobstructed viewing throughout property and from the site perimeter lines Secure robustly using sturdy fasteners at all corners to help prevent vandalism
- Lights will be provided near unit doorways and site lighting will cover exterior door areas.
- Reinforced hurricane windows and doors are used
- 180-degree wide angle viewers are included for all exterior doors
- Property edges are defined with low landscaping
- Building entrances will be enhanced with architectural elements, walkways, lighting and signage
- Buildings will be identified using street numbers that are a minimum of 5 inches high and light during nighttime hours. Numbers will be unobstructed by landscaping or external features
- Parking spaces will be clearly and individually marked and assigned for authorized use only.
- Tow away and unauthorized signage will be provided in the parking areas.
- Property Rule signage language must be clear and prominently posted in appropriate areas listing clear policies and regulations regarding authorized legitimate activities and/ or unauthorized prohibited activities on the property.
- Use highly reflective light color paint for covered parking areas &/or multi-level parking garages to increase the overall amount of natural & artificial light
- Install convex security mirrors to increase visibility around blind corners, ramps & any points of intersection between vehicle lanes of travel & pedestrian pathways.

ELECTRONIC SURVEILLANCE:

- Any potentially vulnerable areas that cannot be observed through Natural Surveillance must be covered by electronic surveillance monitoring. Such areas can include, but are not limited to: meeting rooms, workout / exercise rooms, employee breakrooms, customer waiting rooms, interior & exterior common areas, etc.
- Cameras will be vandal-proof and bullet-style. CPTED plan shows camera locations with 100-degree horizontal field of view (see UniFi <https://ui.com/us/en/camera-security/bullet>).
- Building-mounted electronic surveillance is used to capture full coverage of parking areas parking lot, narrow alley south of the building, and dumpster area.
- Surveillance Monitors depicting real time security camera views must be strategically located for maximum overlapping active and passive observation.
- Site entrance has camera locations oriented to capture the front and rear of vehicles entering and exiting
- Cameras will be monitored by management or security personnel. Monitors to be located in lobbies or reception areas, visible to visitors.
- All cameras will be strategically placed so they will not be obstructed by the growth of existing or future landscaping, as well as light poles.
- Key security office / room / key storage closet must be covered by electronic surveillance
- If the building/property has a Wi-Fi system, it needs to be encrypted and password protected. If Wi-Fi is offered as a complimentary service by a business, then it should be disabled when the business is closed to the public.

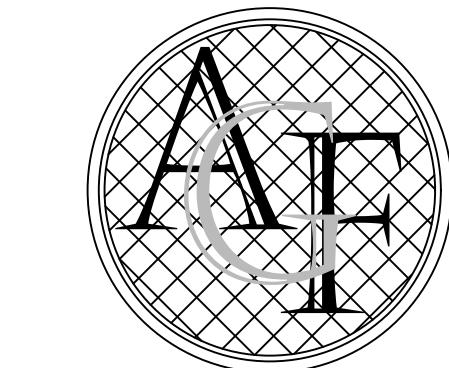

FANJUL & ASSOCIATES, LLC
ARCHITECTURE, PLANNING & INTERIOR DESIGN

AA26000725


ARTURO G. FANJUL, RA
PRESIDENT

5455 SW 8TH STREET, SUITE 240
CORAL GABLES, FLORIDA 33134

PH. 305 726.8313
FAX 305 356.3686

arturo@fanjularchitects.com

"A BETTER LIFE THROUGH DESIGN"

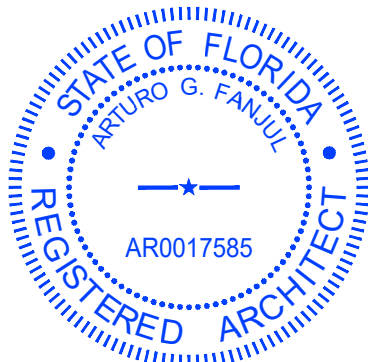

ARTURO G. FANJUL AR0017585
STATE OF FLORIDA REGISTERED ARCHITECT

This item has been electronically signed and sealed by:

Printed copies of electronically signed, dated, and sealed documents are not considered signed and sealed and the SIA authentication code must be verified on any electronic copies.

DESIGN REVIEW



WEST POMANO

2690 W SAMPLE ROAD
POMPANO BEACH, FL 33069
ID:484221070031/32/32

CPTED PRINCIPALS
AND NOTES

REVISION	NO.

DATE: 10/24/2025

SCALE:

DRAWN: AGF

CHECKED: AGF

JOB NO. 24-0704

PERMIT NO.

OWNERSHIP
OF THESE DOCUMENTS & SPECIFICATIONS AS INSTRUMENTS OF SERVICE ARE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT WHETHER THE PROJECT THEY ARE MADE FOR IS EXECUTED OR NOT. THEY SHALL NOT BE USED BY OWNER OR OTHERS ON OTHER PROJECTS OR FOR ADDITIONS TO THIS PROJECT BY OTHERS, EXCEPT BY AGREEMENT IN WRITING AND WITH APPROPRIATE COMPENSATION TO THE ARCHITECT.

PS-2