





Issue #	Issue Date / For
01	03.29.21 / Bldg. Dept. Comments
02	06.03.21 / Bldg. Dept. Comments
04	09.28.21 / Owner Revisions

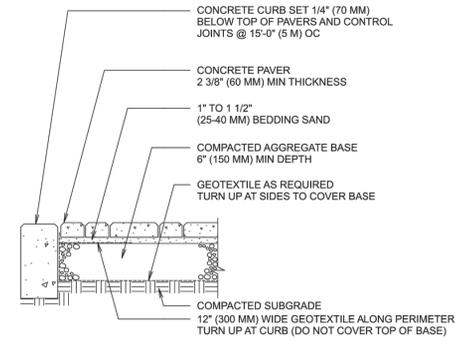

- NOTES:
- THICKNESS OF AGGREGATE BASE WILL VARY WITH SUBGRADE CONDITIONS AND CLIMATE. COLDER CLIMATES MAY REQUIRE THICKER BASES.
 - CONCRETE PAVERS SHOULD BE PLACED ON A CEMENT TREATED BASE IF SOIL IS EXTREMELY WEAK OR CONSTANTLY SATURATED. PAVERS CAN BE OVERLAID OR INLAID ON EXISTING ASPHALT OR CONCRETE DRIVEWAYS.
 - CONSULT ICP1 TECH SPEC 2 FOR GUIDELINES ON SPECIFICATIONS FOR BASE MATERIALS, SUBGRADE SOIL AND BASE COMPACTION.

2 PAVER DETAIL
 SCALE: N.T.S.

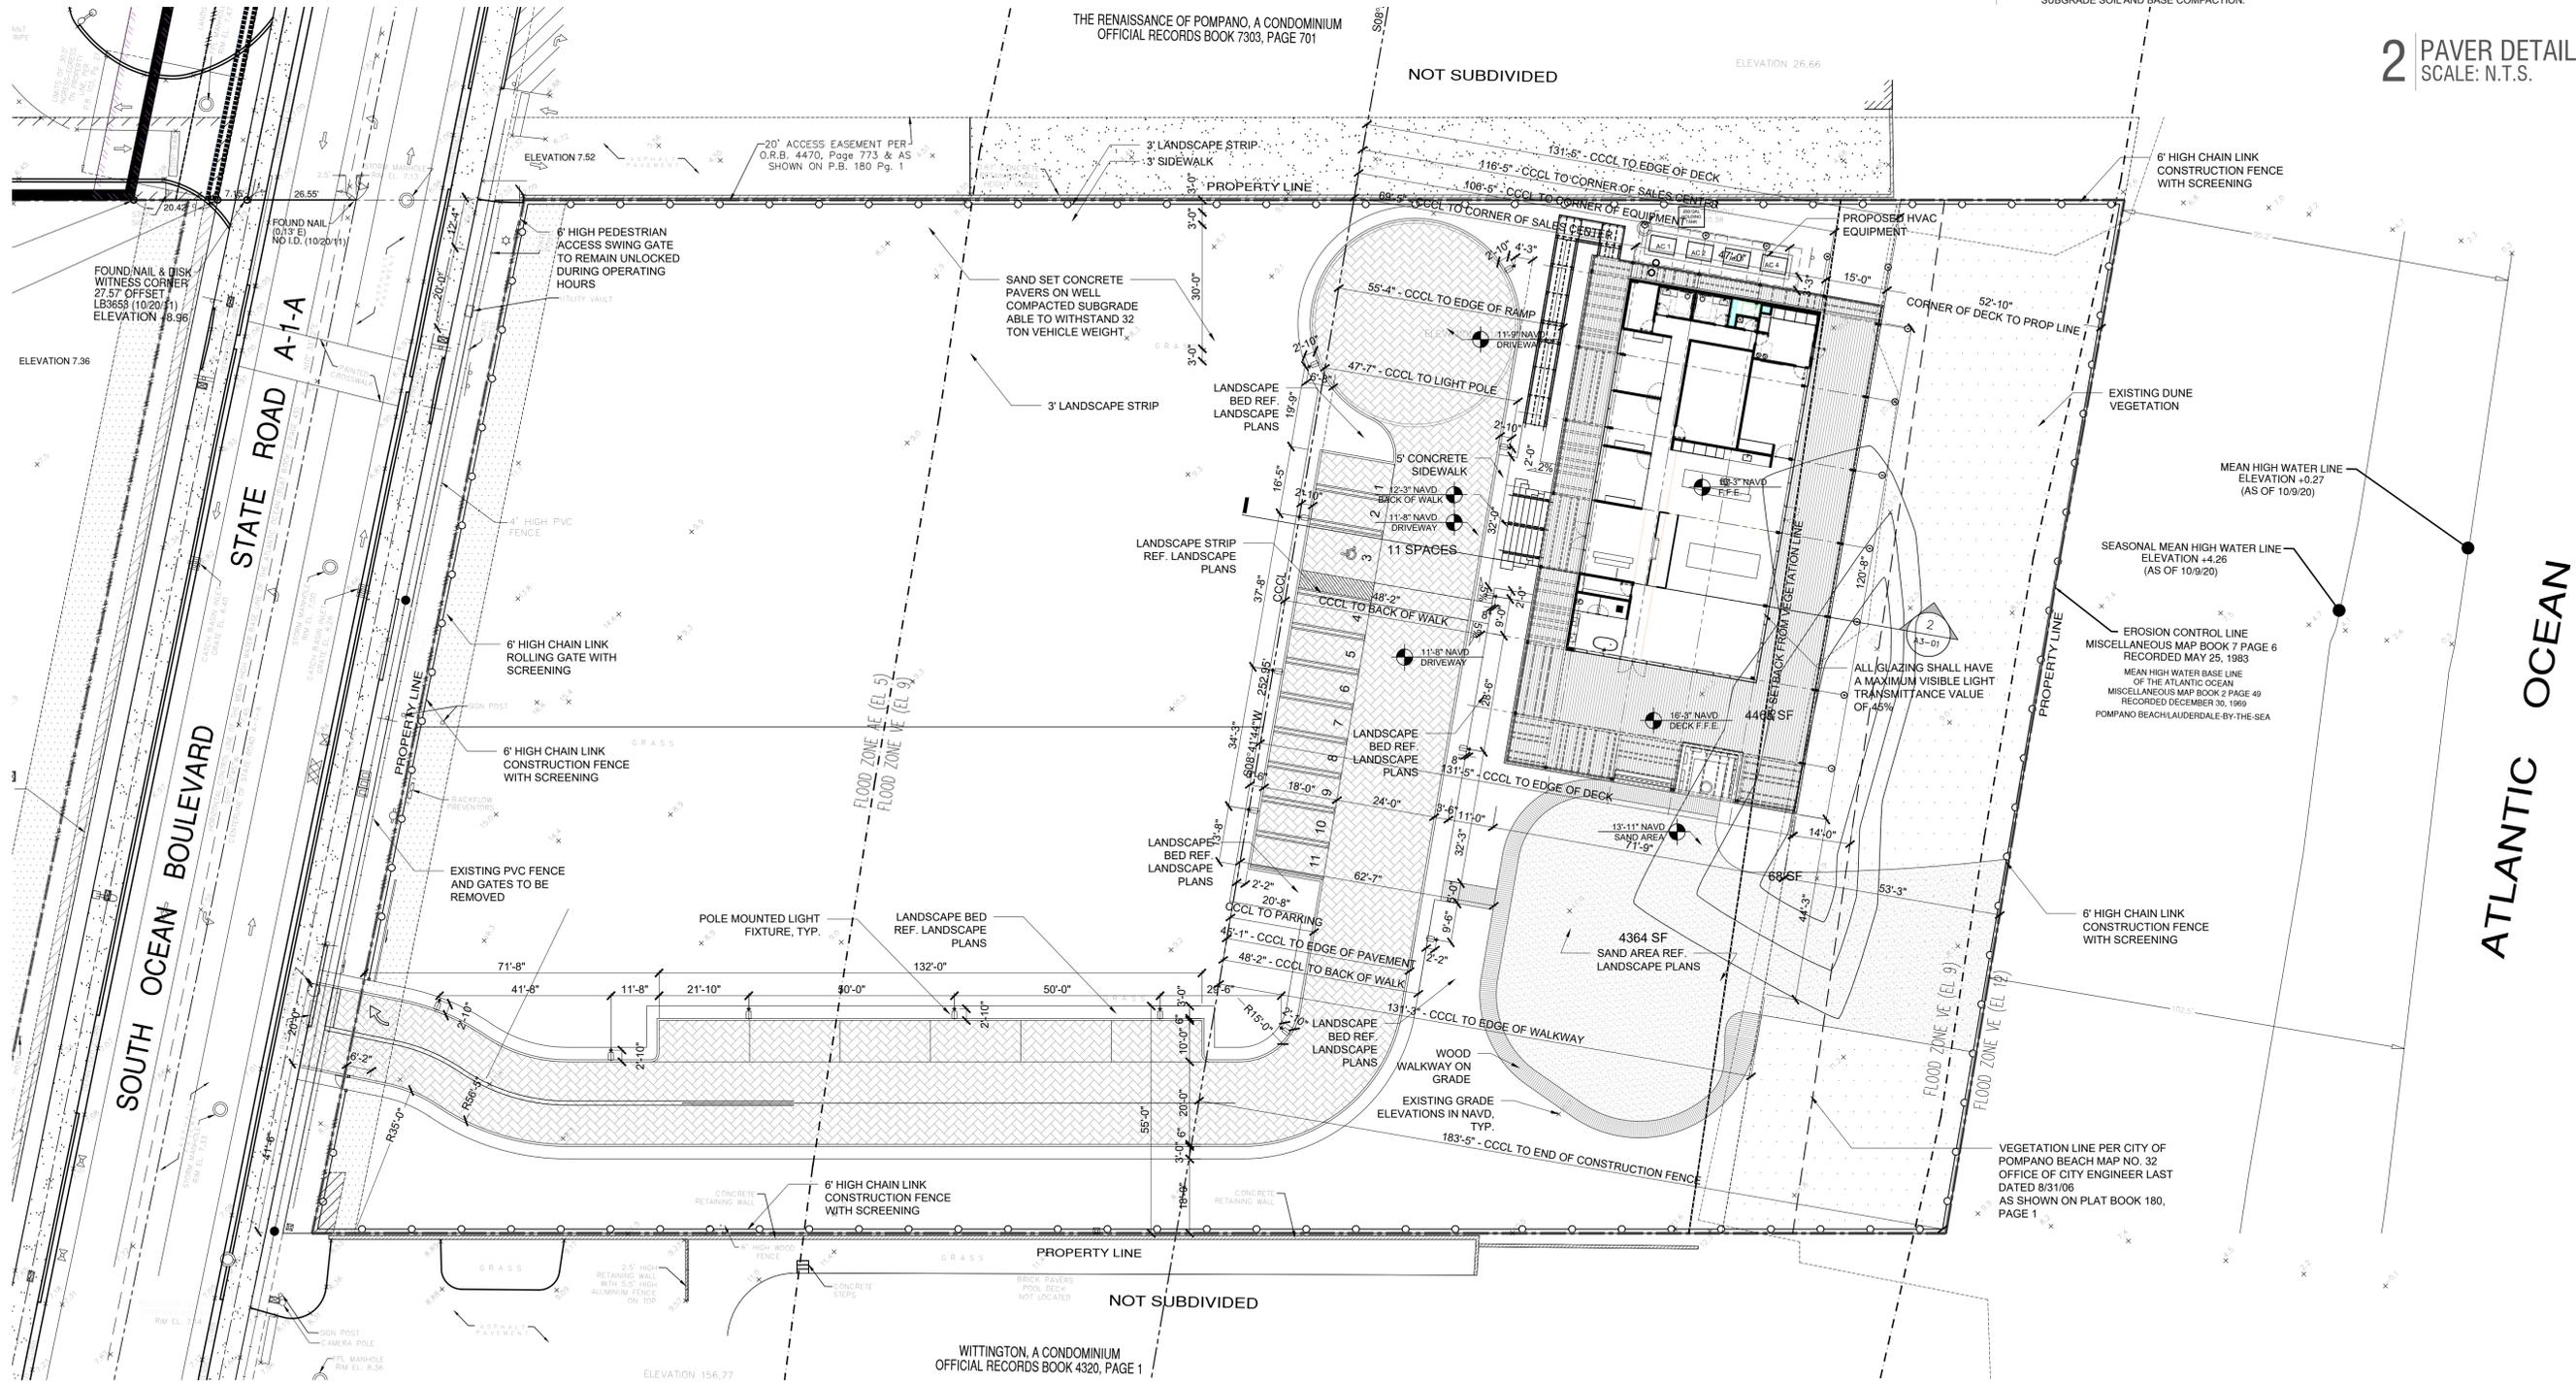

1 SITE PLAN
 SCALE: 1" = 20'