



[illegible]

COPYRIGHT © 2024 MSA ARCHITECTS, INC.
 THE ARCHITECTURAL DESIGN AND DETAIL
 DRAWINGS FOR THIS BUILDING AND/OR
 OVERALL PROJECT ARE THE LEGAL
 PROPERTY OF AND ALL RIGHTS ARE
 RESERVED BY THE ARCHITECT. THEIR USE
 FOR REPRODUCTION, CONSTRUCTION, OR
 DISTRIBUTION IS PROHIBITED UNLESS
 AUTHORIZED IN WRITING BY THE ARCHITECT.

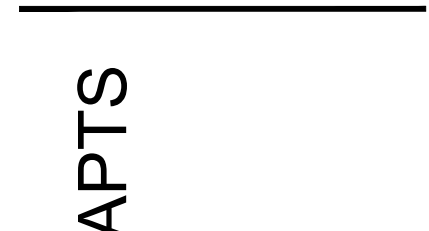

LS-0.8

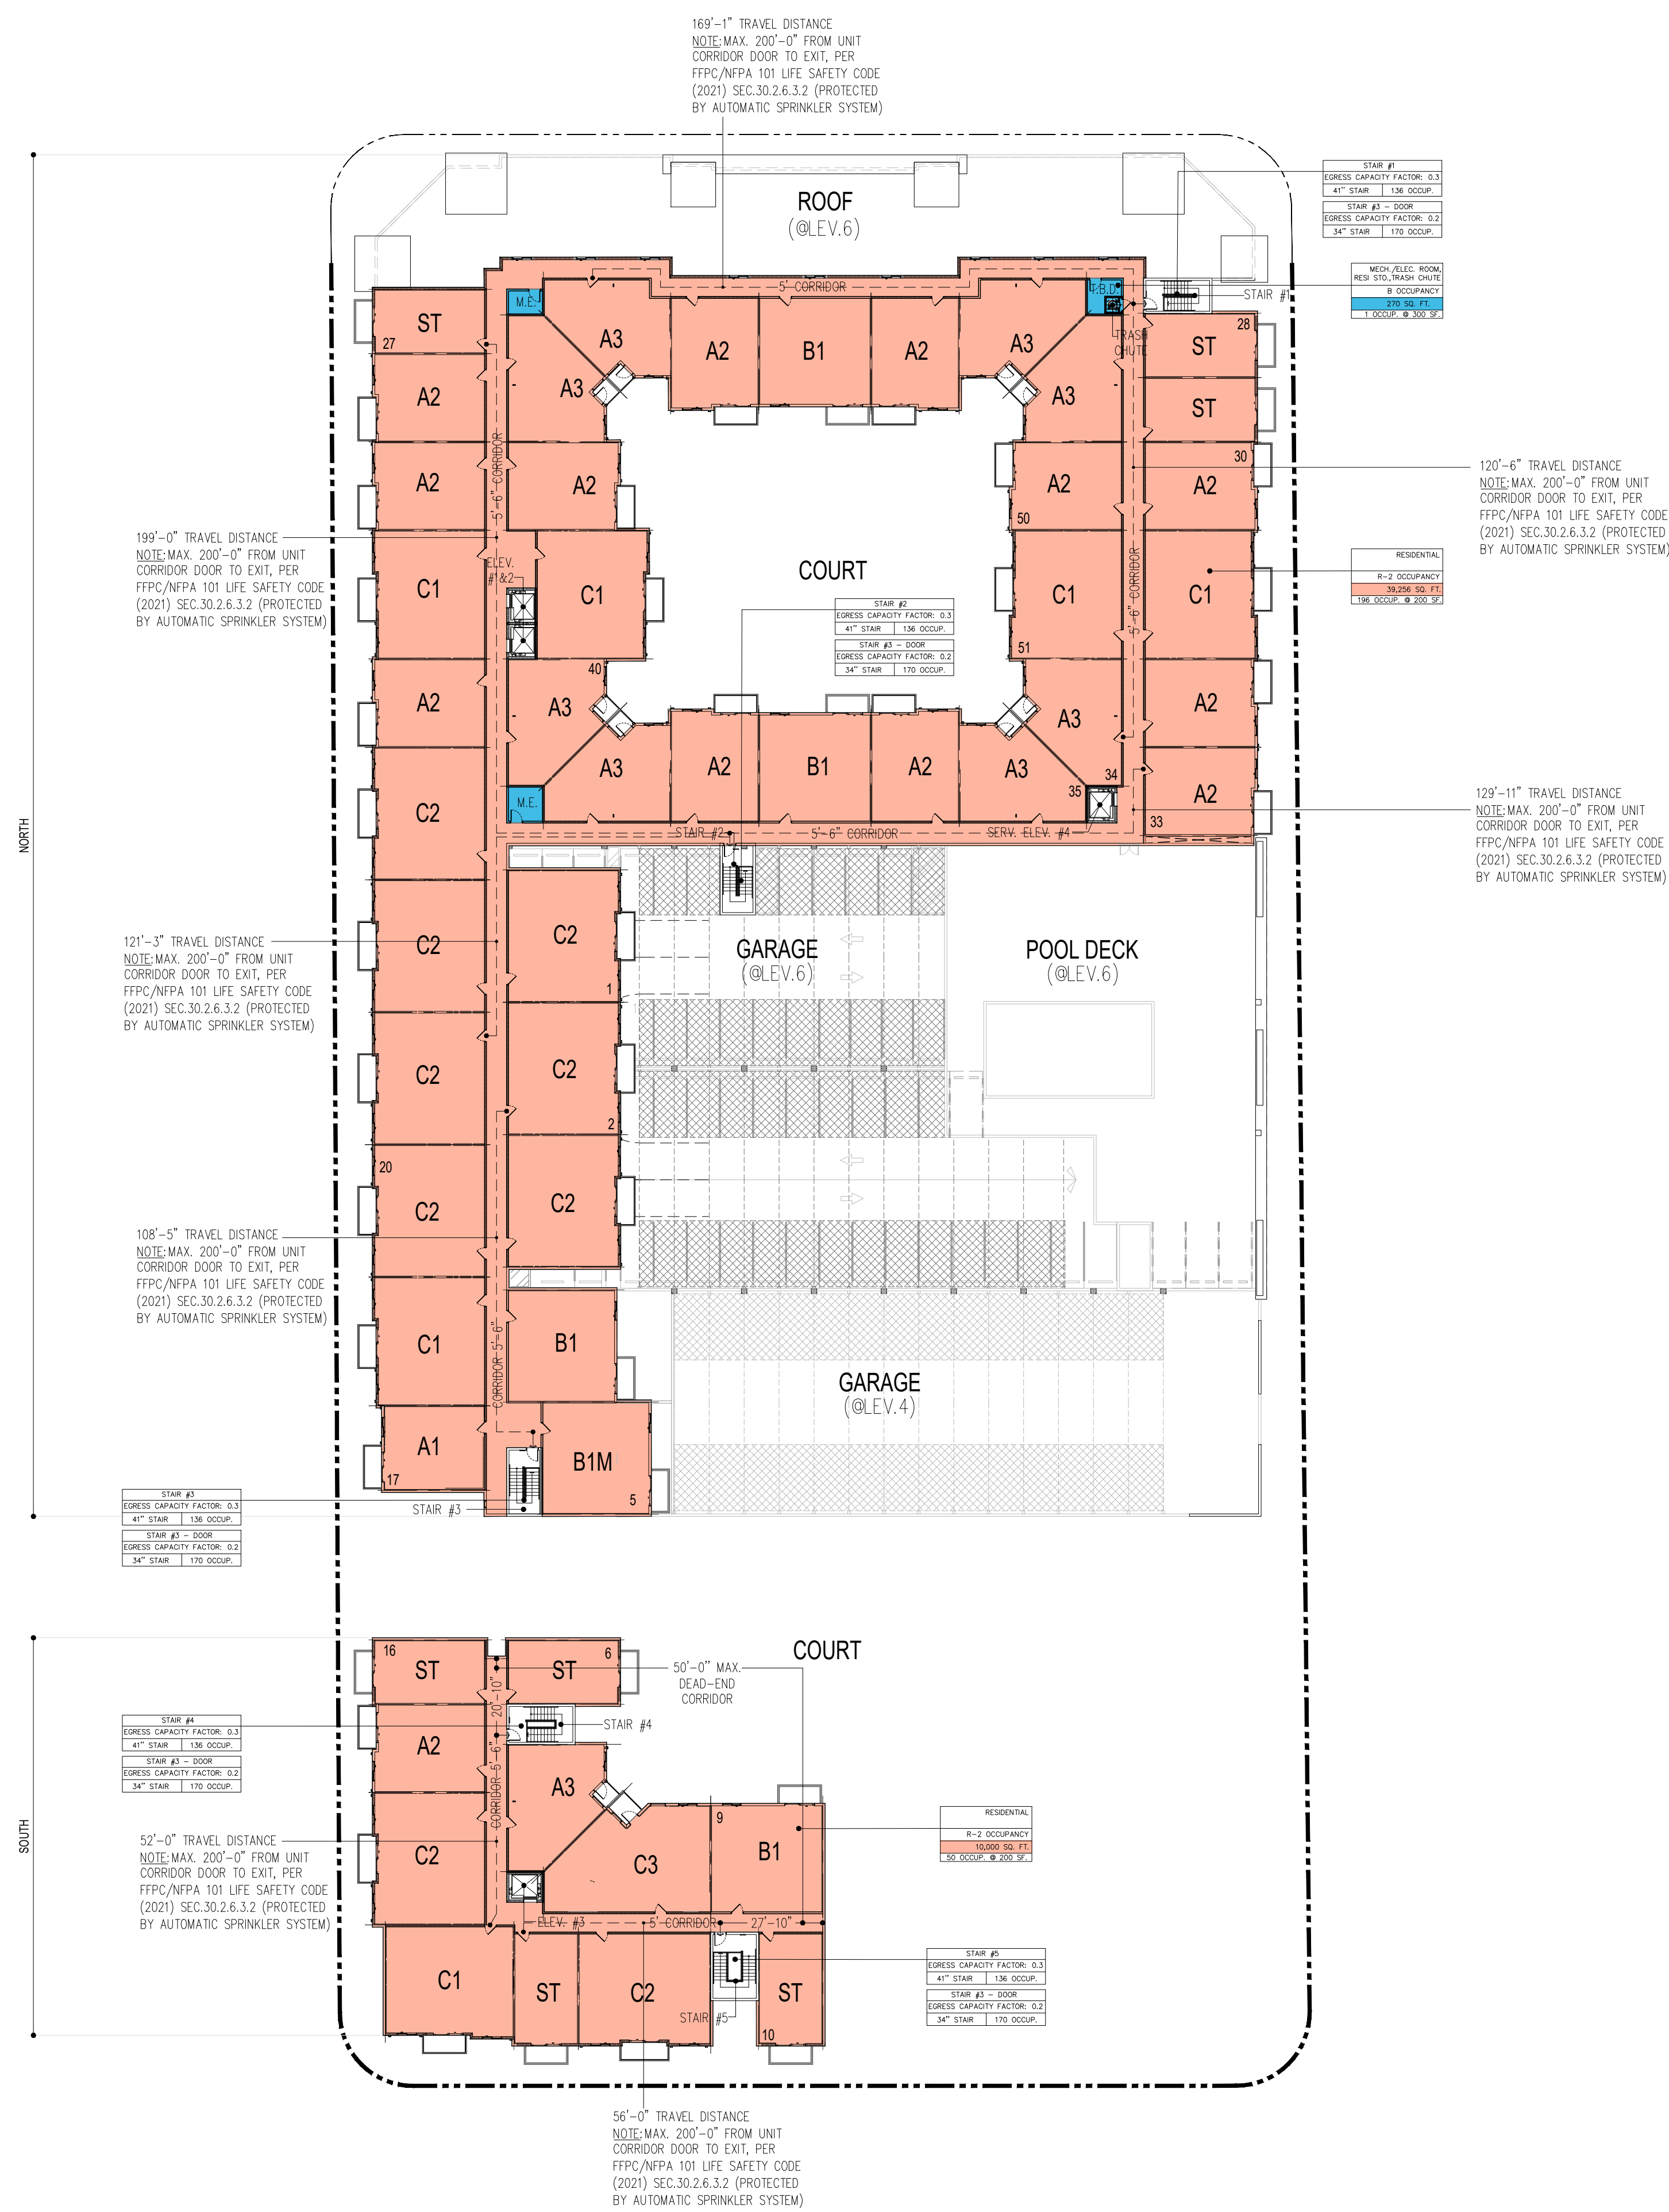


BUILDING (NORTH)
OCCUPANT LOAD FACTOR, PER F.F.P.C 7.3.1.2 & PER F.B.C. 1004.1.2
OCCUPANCY CALCULATION:

EGRESS CAPACITY TABULATIONS	
GROUP R-2	
NEW APARTMENT - FFPC-101, CHAPTER 30	
STORAGE - FFPC-101, CHAPTER 42	
LEVEL EGRESS WIDTH REQUIRED	197 OCCUP.(0.2) = 39.4"
LEVEL EGRESS WIDTH PROVIDED	3 @ 34" = 102"

SPACE	S.F	S.F/PERSON	OCCUP. LOAD
R-2 OCCUPANCY RESIDENTIAL AREA	10,000 SQ. FT.	200 S.F	50 OCCUP.
		TOTAL	50 OCCUP.
EGRESS CAPACITY TABULATIONS			
GROUP R-2			

STAIR EGRESS WIDTH REQUIRED $50 \text{ OCCUP.} \{0.3\} = 15$
STAIR EGRESS WIDTH PROVIDED $2 @ 41" = 82"$

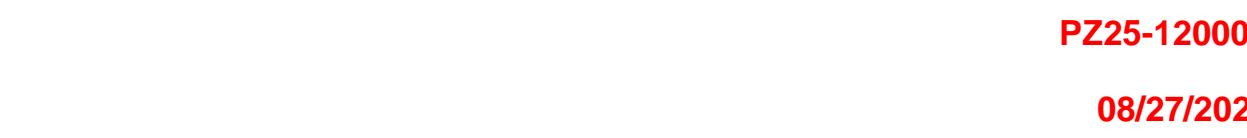

PZ25-12000001

08/27/2025