



PARTIAL  
SOUTH ELEVATION 3

SCALE: 1/8" = 1'-0"

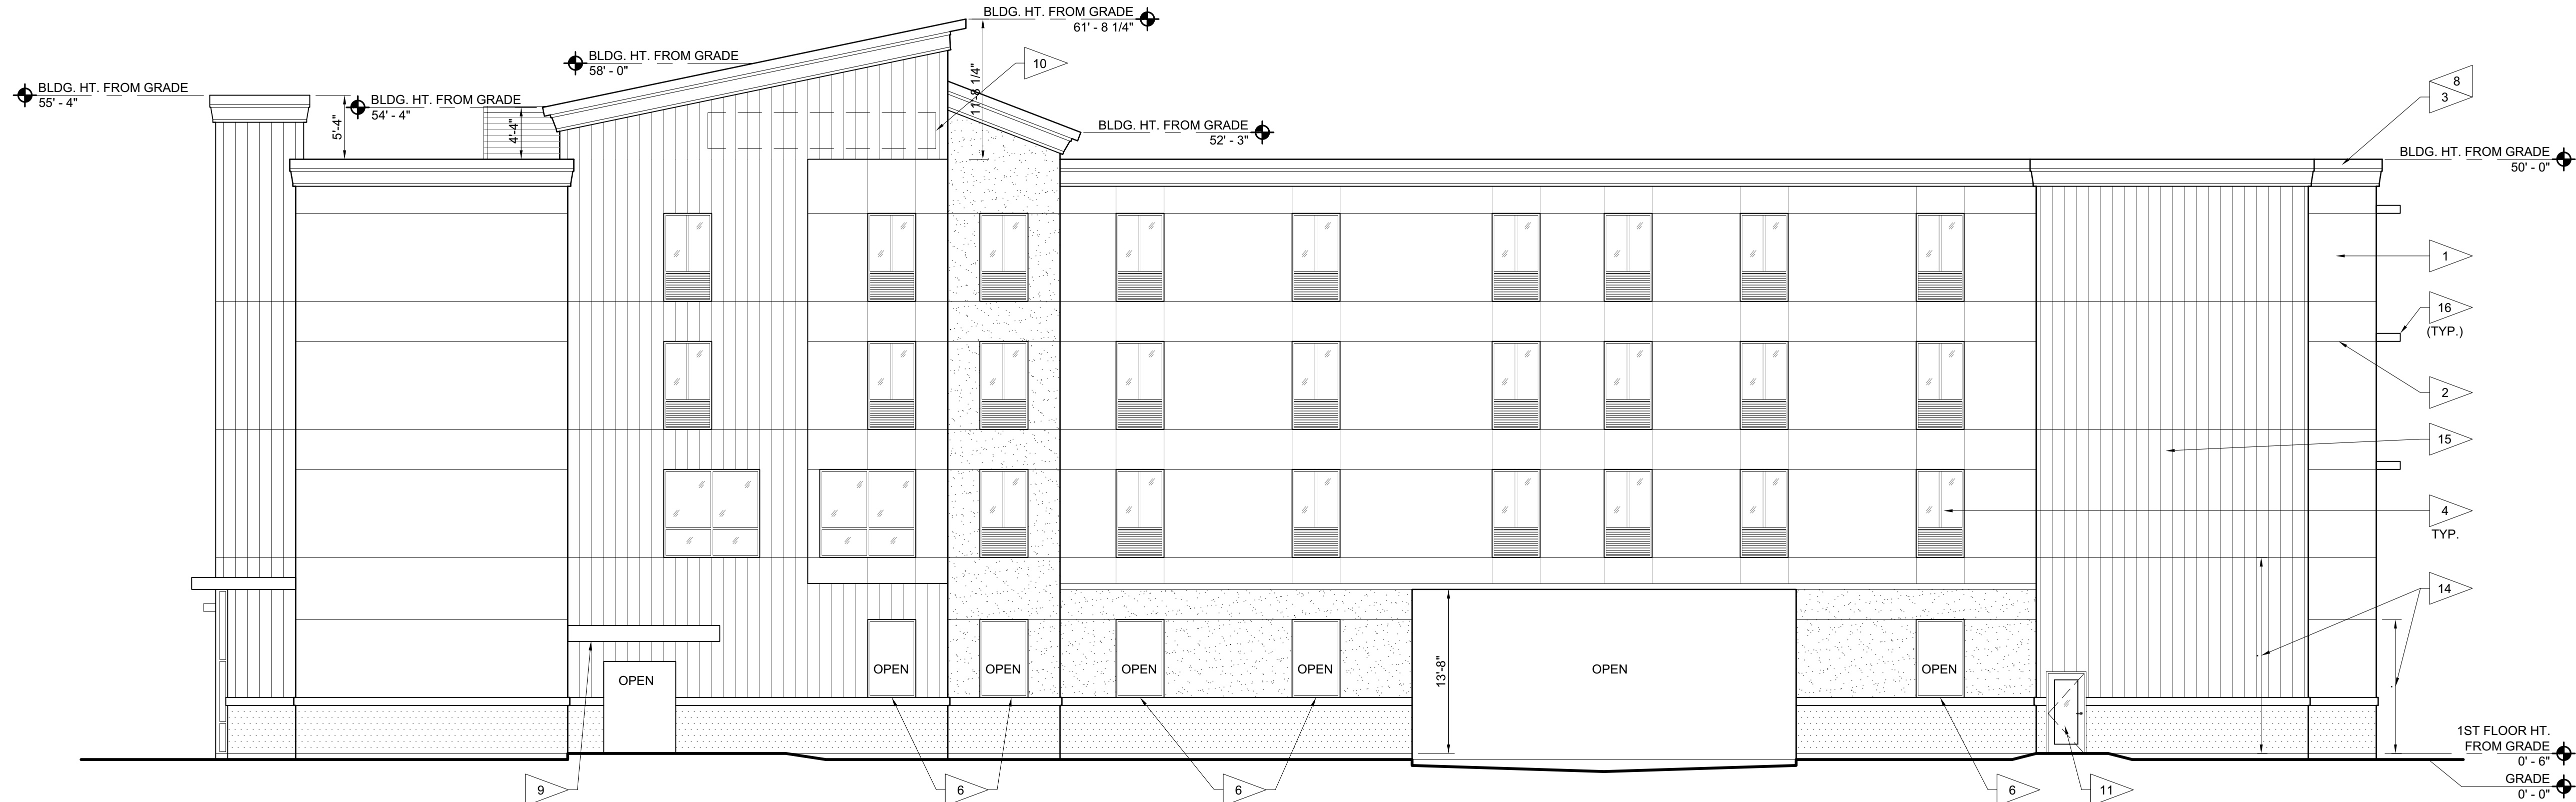


WEST ELEVATION 1

SCALE: 1/8" = 1'-0"

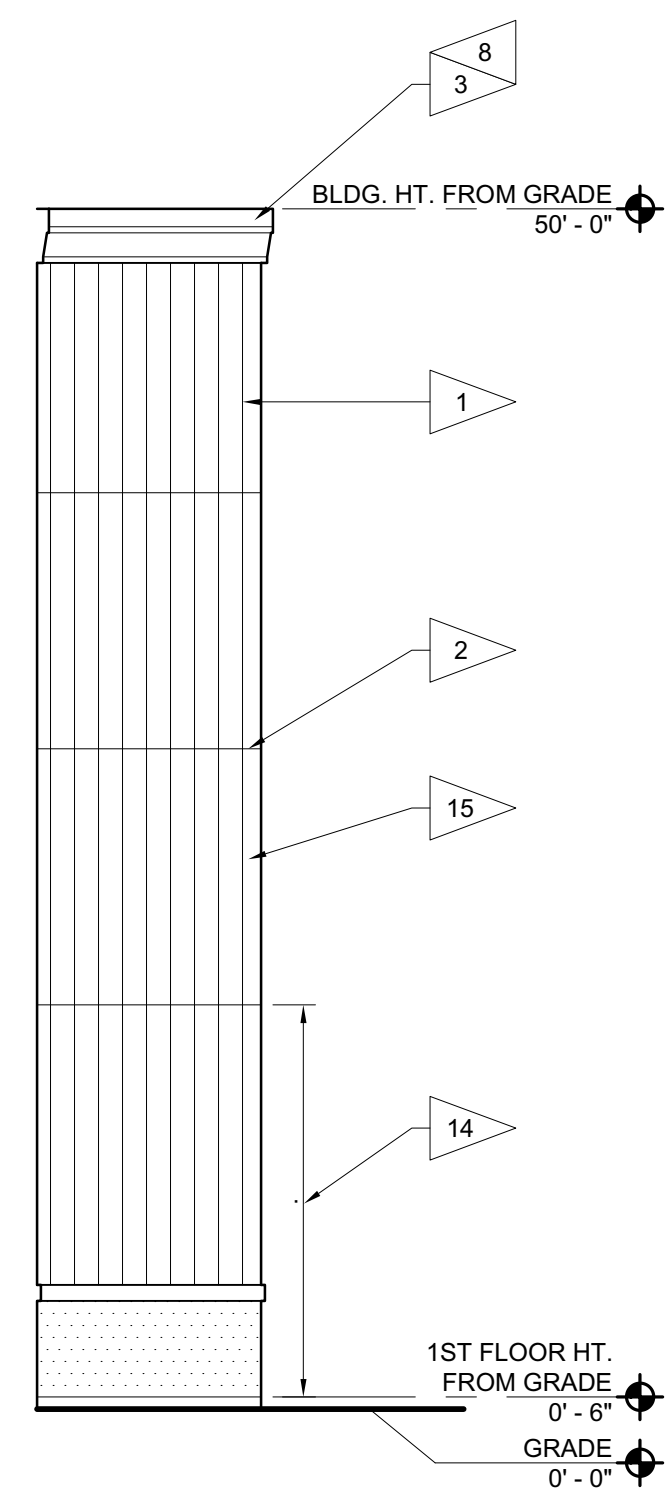

PARTIAL  
NORTH ELEVATION 4

SCALE: 1/8" = 1'-0"

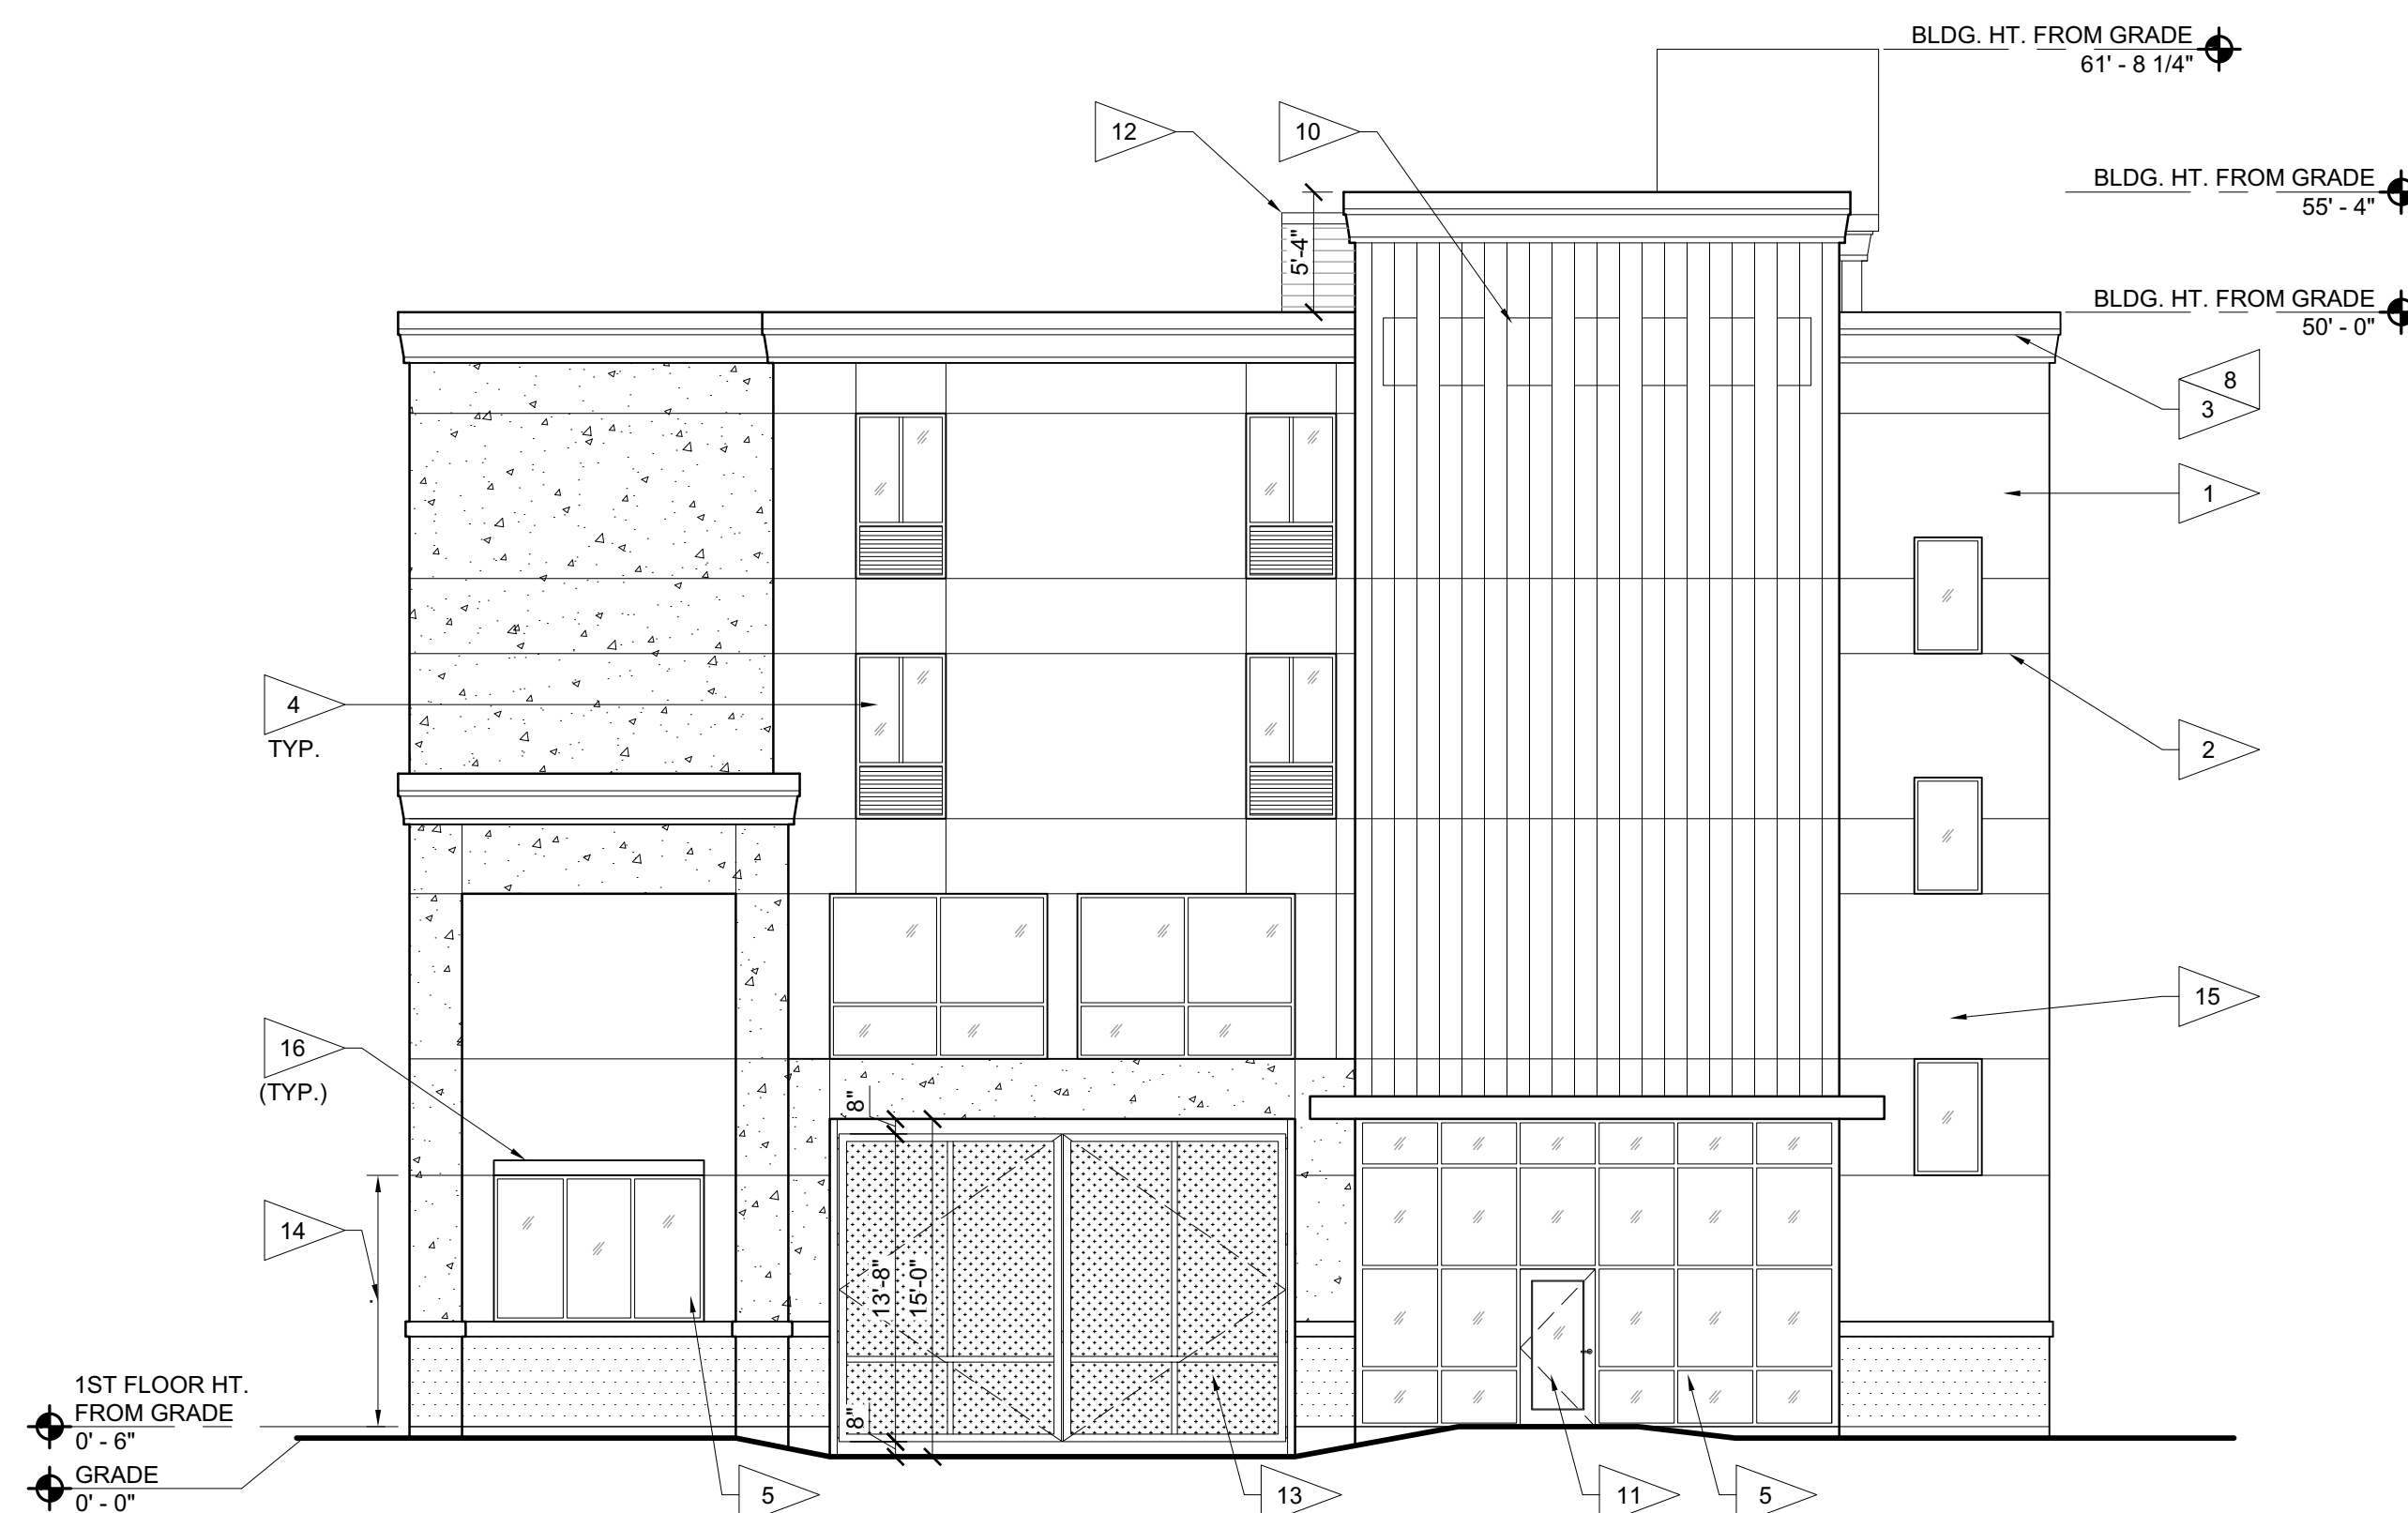

NORTH ELEVATION 2

SCALE: 1/8" = 1'-0"

## 1ST FLOOR FENESTRATION:

1ST FLOOR FACADE AREA (GRADE TO 2ND FLR LINE)	TOTAL	AREA 1226 SF	PERCENT 100%
DOOR & WINDOW AREA	REQUIRED	368 SF	30%
		368 SF	30%

## GENERAL NOTES:

- REFER TO CANDLEWOOD SUITES STANDARDS MANUAL GUIDE FOR ADDITIONAL INFORMATION REGARDING EXTERIOR MATERIALS, CONSTRUCTION REQUIREMENTS AND SIGNAGE REQUIREMENTS.

## FINISH LEGEND

	P1 - CEMENT STUCCO W/ VERTICAL "V" GROOVES AT 12" O.C. SHERWIN WILLIAMS SUMMIT GRAY - SW 7669
	P2 - CEMENT STUCCO SHERWIN WILLIAMS ICE CUBE - SW 6252
	P3 - CEMENT STUCCO SHERWIN WILLIAMS OUTERSPACE - SW 6251
	P4 - CEMENT STUCCO SHERWIN WILLIAMS SUMMIT GRAY - SW 7669
	P5 - CEMENT STUCCO SHERWIN WILLIAMS

## KEY NOTES: XX

- CEMENT STUCCO SYSTEM - SEE FINISH LEGEND FOR COLOR.
- CONTROL JOINT - LOCATIONS AS SHOWN WITH ADDITIONAL JOINTS IF REQUIRED BY STUCCO SYSTEM.
- CORNICE BAND - STUCCO PROJECTION. SEE FINISH LEGEND FOR COLOR.
- INTEGRATED EXTERIOR WINDOW AND PTAC LOUVER - CLEAR ANODIZED COLOR. SEE WINDOW SCHEDULE.
- ALUMINUM STOREFRONT - CLEAR ANODIZED COLOR. SEE WINDOW SCHEDULE.
- ALUMINUM STOREFRONT (NO GLASS) - CLEAR ANODIZED COLOR.
- AUTOMATIC ALUMINUM SLIDING DOOR - SEE SCHEDULE. CLEAR ANODIZED COLOR.
- METAL COPING SYSTEM - MATCH ADJACENT WALL COLOR.
- ENTRY CANOPY - SEE FINISH LEGEND FOR COLOR.
- SIGNAGE - COORDINATE COLORS AND DESIGN WITH HOTEL BRAND STANDARDS.
- ALUMINUM STOREFRONT DOOR - CLEAR ANODIZED COLOR.
- EQUIPMENT SCREENING PANELS & ACCESS GATE W/ ANCHORAGE & BRACING AS REQUIRED TO WITHSTAND 150 MPH WIND LOAD. COORDINATE MINIMUM HEIGHT W/ EQUIPMENT.
- FIRE DEPT. ACCESS GATE - PERFORATED STAINLESS STEEL PANELS WITH STAINLESS STEEL FRAMES.
- ANTI-GRAFFITI SEALANT - PROVIDE ANTI-GRAFFITI COATING ON ALL CEMENT STUCCO FROM BOTTOM TO 1ST CONTROL JOINT (MIN. 10'-0").
- STAIR TOWER - EGRESS PATH FROM UPPER FLOORS TO EXTERIOR.
- SUNSHADE - PREFINISHED ALUMINUM LOUVERED SUNSHADE 24" X WIDTH OF WINDOW. PROVIDE HURRICANE RESISTANT ATTACHMENT FOR 150 MPH WIND SPEED.
- SECURITY SCREEN PANEL - PREFINISHED POWDER COATED 2"x2" WELDED 10 GA WIRE MESH WELDED INTO A 1-1/4"x1-1/4"x13 GA ANGLE FRAME.
- CMU WALL - TOP TO MATCH HEAD OF OPENINGS (11'-2" ABOVE 1ST FLOOR LINE).