


SECTION A-A  
NTS

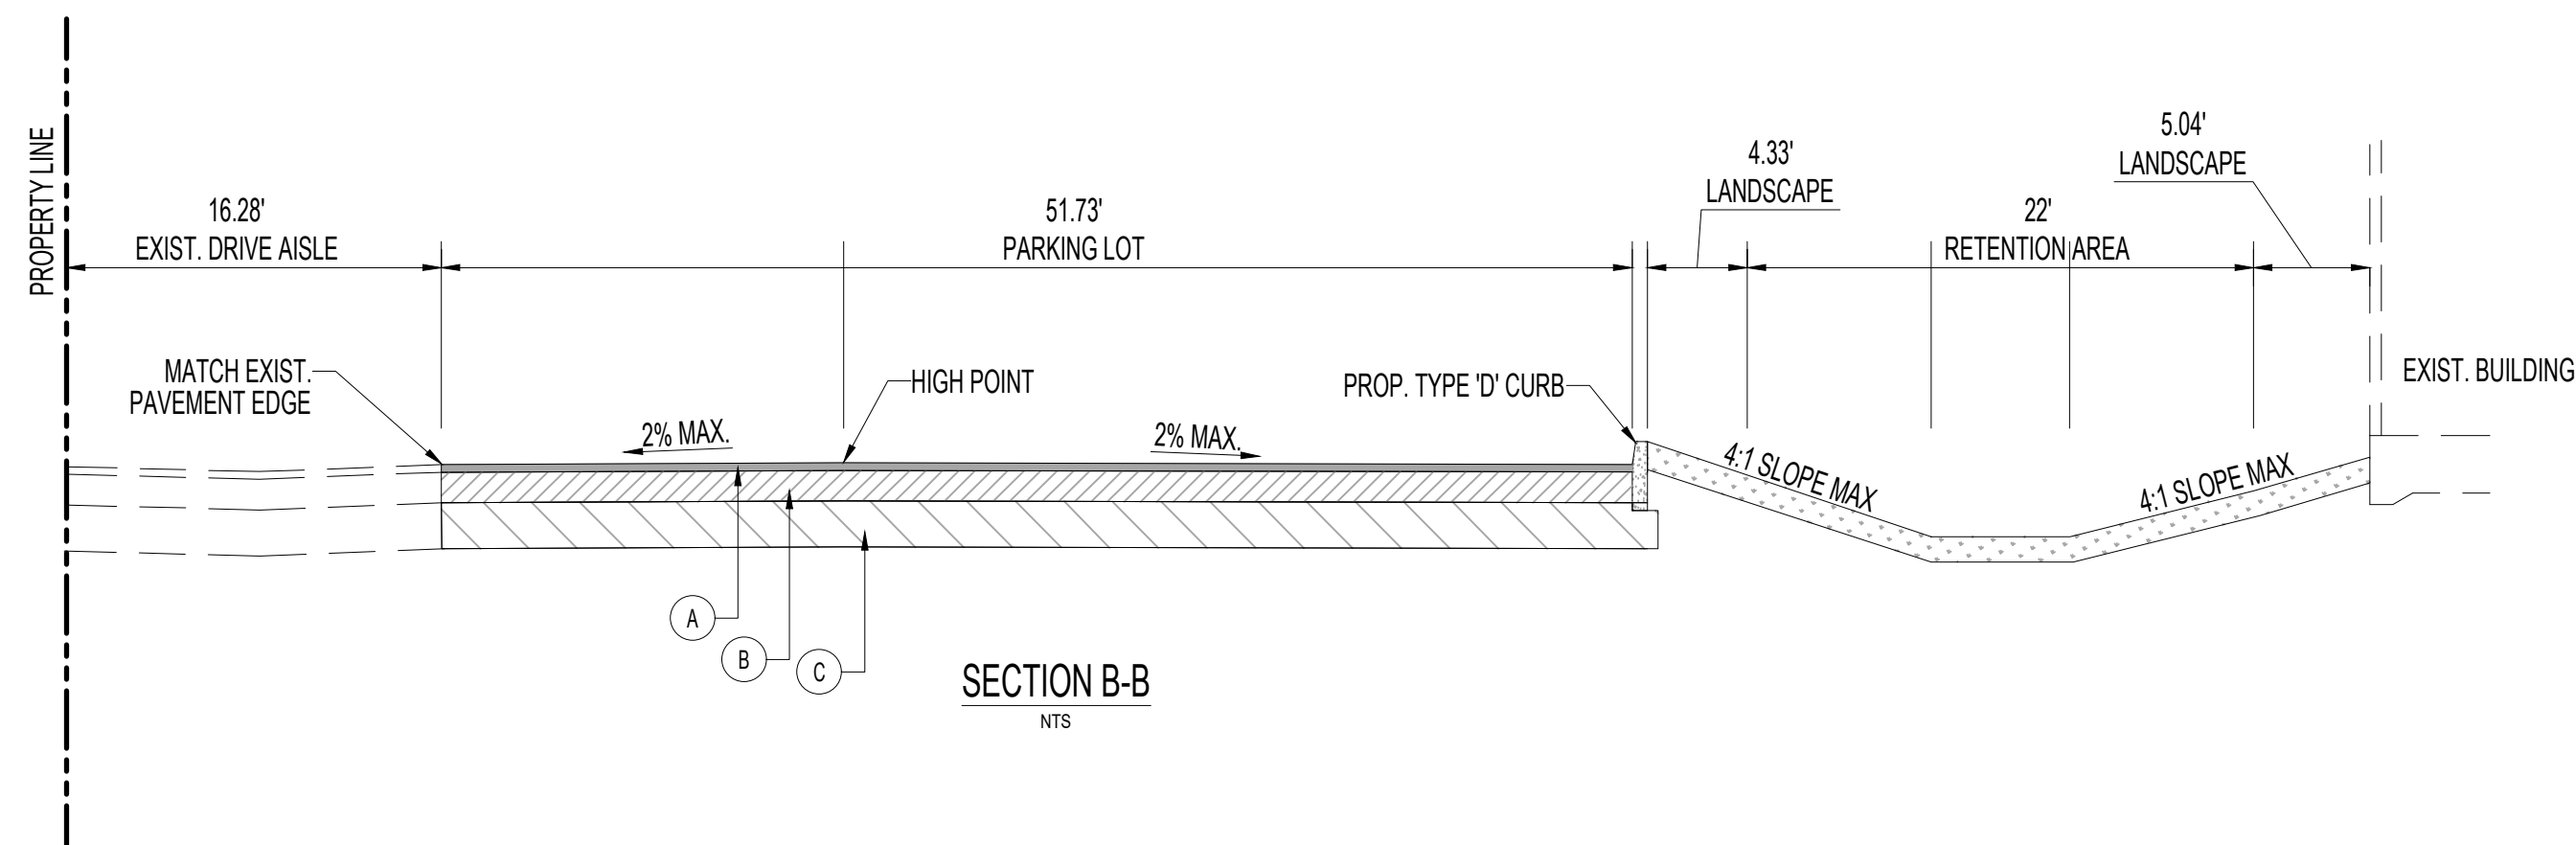

<b>(A)</b>	<p><b>WEARING SURFACE: (ASPHALT AREAS ONLY)</b></p> <p>INSTALLATION OF THE 2.0" ASPHALTIC CONCRETE SURFACE COURSE SHALL CONFORM WITH THE REQUIREMENTS OF THE FLORIDA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR TYPE SP-8 ASPHALTIC CONCRETE, AND SHALL BE CONSTRUCTED WITH (2) LIFTS OF 1.00" SP-8.5 ASPHALTIC CONCRETE WITH TACK COAT BETWEEN LIFTS.</p>
<b>(B)</b>	<p><b>LIME ROCK BASE: (ASPHALT VEHICULAR PAVERS AREAS)</b></p> <p>LIME ROCK BASE COURSE MATERIAL FOR PAVED AREAS SHALL BE A MINIMUM 8" THICKNESS AND COMPACTED TO 98% MAXIMUM DRY DENSITY PER AASHTO T-180 (LBR 100); OTHER SUBSTITUTES SHALL BE PER FDOT SPECIFICATIONS AND PROVIDE EQUIVALENT STRUCTURAL NUMBER AS ABOVE (MIN LBR 100).</p>
<b>(C)</b>	<p><b>SUB-GRADE: 12" STABILIZED SUB-BASE COMPACTED TO 98% OF MAX. DRY DENSITY PER AASHTO T-180 (MIN LBR 40).</b></p>

[illegible]

PROJECT No.:	F250001
DRAWN BY:	CAD
CHECKED BY:	MAT
DATE:	02/24/2025
CAD I.D.:	F250001-SECTIONS



6300 NW 31ST AVENUE  
FORT LAUDERDALE, FL 33309  
PH: (954) 202-7000  
FX: (954) 202-7070  
[www.ThomasEngineeringGroup.com](http://www.ThomasEngineeringGroup.com)

<p>SHEET TITLE:</p> <p><b>CROSS SECTIONS</b></p> <hr/> <p>SHEET NUMBER:</p> <p><b>C-12</b></p>
--