


DRC
PZ25- 12000043
03/04/2026

ON-SITE CONCRETE SIDEWALK

1. ALL SIDEWALKS WITHIN THE PROJECT SITE OUTSIDE OF VEHICULAR PATHWAYS SHALL BE 4" THICK CONCRETE WITH BROOM FINISH.
2. ALL SIDEWALKS WITHIN VEHICULAR PATHWAYS SHALL BE 6" THICK CONCRETE WITH BROOM FINISH.
3. CONTRACTOR SHALL REFER TO LANDSCAPE PLANS FOR LIMITS OF CONCRETE COLORING AND STAMPING.


ON-SITE CONCRETE SIDEWALK

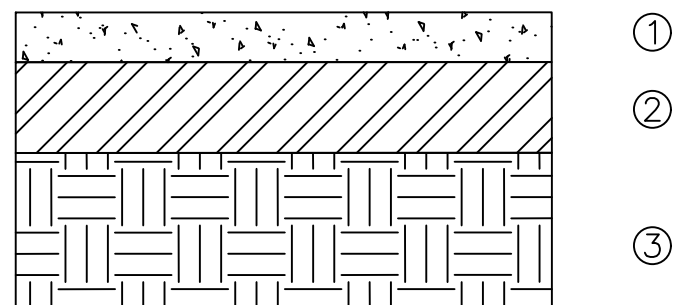

HEAVY DUTY CONCRETE PAVEMENT

1. 6" 4,000 PSI CONCRETE REINFORCED WITH #3 BAR @16" ON-CENTER EACH WAY AND WITH SYNTHETIC MICROFIBERS @ 7.5 LBS/CY
2. 8" LIMEROCK BASE MIN. LBR 100, COMPACTED 98% MAX. DENSITY PER AASHTO T-180
3. 12" STABILIZED SUBGRADE MIN. LBR 40, COMPACTED TO 58% MAX. DENSITY PER AASHTO T-180


HEAVY DUTY CONCRETE PAVEMENT

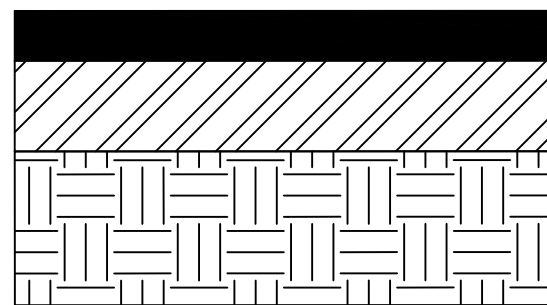

LIGHT DUTY ASPHALT

1. 1.5" FC-9.5 OR FC-12.5 SURFACE COURSE
2. 6" LIMEROCK BASE MIN. LBR 100, COMPACTED 98% MAX. DENSITY PER AASHTO T-180
3. 12" STABILIZED SUBGRADE MIN. LBR 40, COMPACTED TO 98% MAX. DENSITY PER AASHTO T-180

LIGHT DUTY ASPHALT PAVEMENT

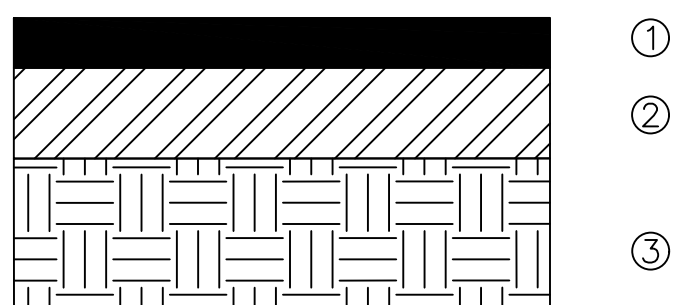

HEAVY DUTY ASPHALT

1. 2" FC-9.5 OR FC-12.5 SURFACE COURSE
2. 8" LIMEROCK BASE MIN. LBR 100, COMPACTED 98% MAX. DENSITY PER AASHTO T-180
3. 12" STABILIZED SUBGRADE MIN. LBR 40, COMPACTED TO 98% MAX. DENSITY PER AASHTO T-180


HEAVY DUTY ASPHALT PAVEMENT

EXISTING ASPHALT TO BE MILLED AND RESURFACED

PROPOSED R/W PAVEMENT RESTORATION

1. CONTRACTOR SHALL MATCH EXISTING PAVEMENT PER FDOT STANDARDS SPECIFICATIONS.


PROPOSED R/W PAVEMENT

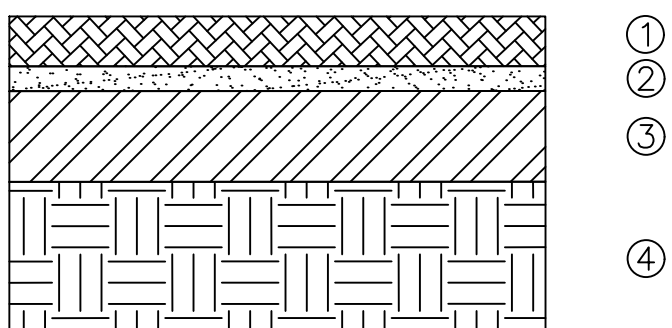

PROPOSED PAVERS

1. 4" TRAFFIC RATED PAVERS
2. 1" BEDDING SAND
3. 8" LIMEROCK BASE MIN. LBR 100, COMPACTED 98% MAX. DENSITY PER AASHTO T-180
4. 12" STABILIZED SUBGRADE MIN. LBR 40, COMPACTED TO 98% MAX. DENSITY PER AASHTO T-180

PROPOSED TRAFFIC RATED PAVERS

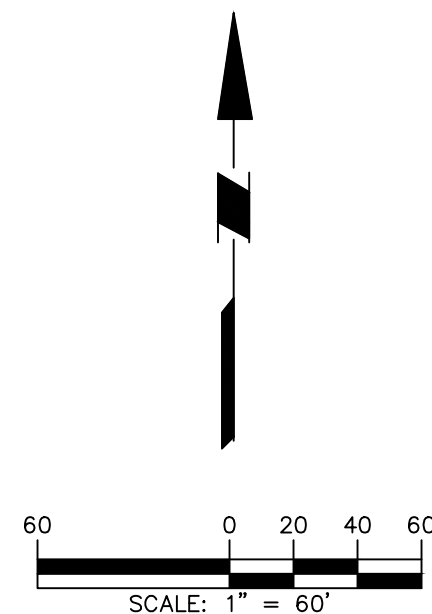

PROFESSIONAL ENGINEER
MICHAEL CARR
No. 72424
STATE OF FLORIDA
DATE SIGNED

LANGAN
Langan Engineering and Environmental Services, LLC.
110 East Broward Boulevard, Suite 1500
Fort Lauderdale, FL 33301
T: 954.320.2100 F: 954.320.2101 www.langan.com
FBPE REGISTRY NO. 65011.B8172L8198

Project
FESTIVAL SOUTH
NW 33RD ST
POMPAHO BEACH
BROWARD COUNTY FLORIDA

Drawing Title
PAVEMENT PLAN

Project No. 330134202	Drawing No. C-3.0
Date JANUARY 2026	
Drawn By DMP	
Checked By CL	

Date	Description	No.