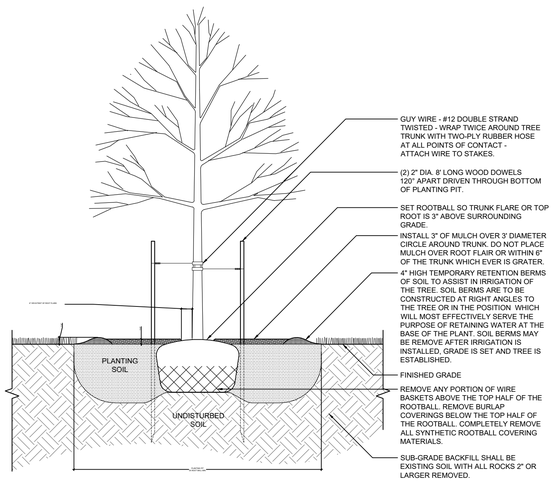

NOTES:
1. CONTRACTOR SHALL ASSURE PERCOLATION OF ALL PLANTING PITS PRIOR TO INSTALLATION.
2. CONTRACTOR SHALL ASSURE HEALTHY ROOT SYSTEM ON ALL TREES. ANY TREE WITH BOUND OR CIRCLING ROOTS SHALL BE REJECTED.
3. ALL SUPPORT MATERIALS ARE TO BE REMOVED FROM THE TREES ONCE THE TREES HAVE BECOME ESTABLISHED (NOT TO EXCEED 12 MONTHS FROM THE COMPLETION OF THE PROJECT).
4. IRREGULAR OR MULTI-STEMED TREES SHALL HAVE A SIMILAR STAKING PATTERN AS SINGLE TRUNKED TREES. STAKES DON'T NEED TO BE ATTACHED TO EVERY STEM.

TREE PLANTING DETAIL & BRACING 3" DBH & UNDER

SCALE: NTS

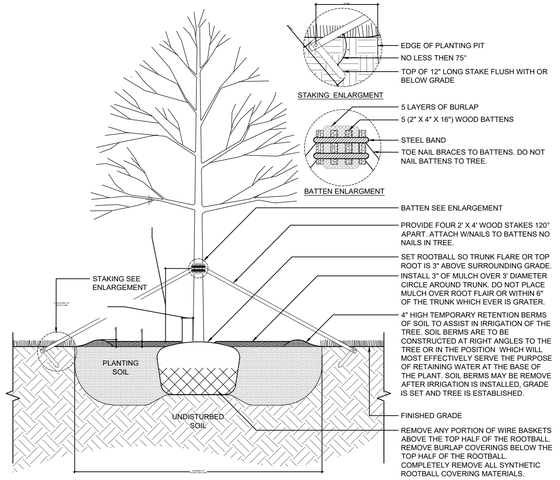

NOTES:
1. CONTRACTOR SHALL ASSURE PERCOLATION OF ALL PLANTING PITS PRIOR TO INSTALLATION.
2. CONTRACTOR SHALL ASSURE HEALTHY ROOT SYSTEM ON ALL TREES. ANY TREE WITH BOUND OR CIRCLING ROOTS SHALL BE REJECTED.
3. ALL SUPPORT MATERIALS ARE TO BE REMOVED FROM THE TREES ONCE THE TREES HAVE BECOME ESTABLISHED (NOT TO EXCEED 12 MONTHS FROM THE COMPLETION OF THE PROJECT).
4. IRREGULAR OR MULTI-STEMED TREES SHALL HAVE A SIMILAR STAKING PATTERN AS SINGLE TRUNKED TREES. STAKES DON'T NEED TO BE ATTACHED TO EVERY STEM.
5. SECURE BATTENS WITH 2-3/4" HI CARBON STEEL BANDS TO HOLD BATTENS IN PLACE DURING PLANTING PROCESS.
6. DO NOT NAIL BATTENS TO TREE.

TREE PLANTING DETAIL & BRACING ABOVE 3" DBH

SCALE: NTS



CURVED TRUNK PALM PLANTING DETAIL



TYPICAL TREE GUYING DETAIL

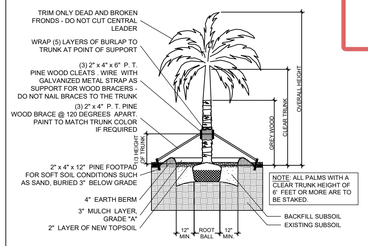

STRAIGHT TRUNK PALM PLANTING DETAIL



TYPICAL SHRUB PLANTING DETAIL



TYPICAL CONTAINER SPACING DETAIL

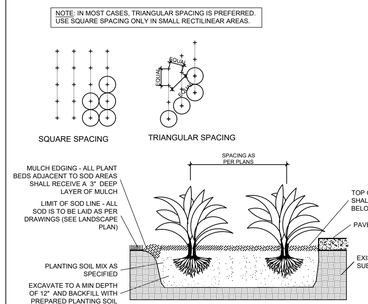

TYPICAL GROUNDCOVER PLANTING DETAIL

PLANTING NOTES:

-All plant material is to be Florida Number 1 or better pursuant to the Florida Department of Agriculture's Grades and Standards for Nursery Plants.

-All plants are to be top dressed with a minimum 3" layer of Melaleuca mulch, Eucalyptus mulch or equal.

-Planting plans shall take precedence over plant list in case of discrepancies.

-No changes are to be made without the prior consent and approval of the Landscape Architect and Owner. Changes includes: additions; deletions; modifications to planting size; pot size; heights; species; grade etc.

-Landscape Contractor is responsible for providing their own square footage takeoffs and field verification for 100% sod coverage for all areas specified.

- All landscape areas are to be provided with automatic sprinkler system which provide 100% coverage, and 50% overlap.

- All trees in lawn areas are to receive a 24" diameter mulched saucer at the base of the trunk.

- Trees are to be planted within parking islands after soil is brought up to grade. Deeply set root balls are not acceptable.

- Planting soil for topsoil and backfill shall be 50/50 mix, nematode free. Planting soil for annual beds to be comprised of 50% Canadian peat moss, 25% salt free coarse sand and 25% Aerolite.

- Tree and shrub pits will be supplemented with "Agriform Pells", 21 gram size with a 20-10-5 analysis, or substitute application accepted by Landscape Architect. Deliver in manufacturer's standard containers showing weight, analysis and name of manufacturer.

Note

- Tree protection barricades must be installed and inspected by Urban Forestry Staff prior to any demolition work beginning on site.

- Provide a note on the plan that there will be no trenching within the dripline of existing trees for the installation of the erosion control fence.

- Demo permit will be for structure and hardscape only. Trees must remain on site and be protected during demolition. (Code Section:155.2411, 155.5204)

- No tree/palm roots or parts shall be cut or damaged due to construction activities on site. If there are any tree/palm root conflicts, contact Urban Forestry Staff for assistance 954-786-4523.

- 155.5203A.3. Demolition Sites

a. If all or any existing structures on a lot are being totally demolished drought resistant sod or drought-resistant ground cover shall be installed on the entire demolition and/or disturbed areas before close-out of the demolition Building Permit and thereafter maintained. All asphalt, rock, and other non-natural materials shall be removed and refilled to the undisturbed lot level with clean soil before any planting or installation of the required drought-resistant sod or ground cover. Such vegetative restoration of a demolition site shall be subject to the standards of this section if conditions stated above are met. ONLY TREE PROTECTION IS ALLOWED ON DEMOLITION PERMITS. NO TREE REMOVAL OR RELOCATION.

- All exotic invasive plant material to be removed from the site. Refer to Tree Disposition Plan and Tree Permit Application.

SOD NOTES:

-Sod is to be grade "A" weed free.

-All areas marked "LAWN" shall be solid sodded with St. Augustine 'Floratam' solid sod. See limit on plan. All areas marked 'Bahia Grass' shall be solid sodded with Paspalum.

-Provide a 2" deep blanket of planting soil as described in planting notes this sheet. Prior to planting, remove stones, sticks, etc. from the sub soil surface. Excavate existing non-conforming soil as required so that the finish grade of sod is flush with adjacent pavement or top of curb as well as adjacent sod in the case of sod patching.

-Place sod on moistened soil, with edges tightly butted, in staggered rows at right angles to slopes.

-Keep edge of sod bed a minimum of 18" away from groundcover beds and 24" away from edge of shrub beds and 36" away from trees, measured from center of plant.

-Sod Shall be watered immediatley after installation to uniformly wet the soil to at least 2" below the bottom of the sod strips.
-Excavate and remove excess soil so top of sod is flush with top of curb or adjacent pavement or adjacent existing sod.

GENERAL NOTES:

-The Landscape Contractor is to locate and verify all underground and overhead utilities prior to beginning work. Contact proper utility companies and / or General Contractor prior to digging for field verification. The Owner and the Landscape Architect shall not be responsible for any damages to utility or irrigation lines (see Roadway Plans for more utility notes).

-Landscape Contractor is to verify all current drawings and check for discrepancies and bring to the attention of the Landscape Architect prior to commencing with the work.

-All unattended and unplanted tree pits are to be properly barricaded and flagged during installation.

-All planting plans are issued as directives for site layout. Any deviations, site changes, etcetera are to be brought to the attention of the Landscape Architect for clarification prior to installation.

Note: Drought resistant sod or drought-resistant ground cover shall be installed on the entire disturbed areas before close-out of the permit and thereafter maintained. All asphalt, rock, and other non-natural materials shall be removed and refilled to the undisturbed lot level with clean soil before any planting or installation of the required drought-resistant sod or ground cover.

Note: Visibility and unobstructed working space must be maintained from fire apparatus access routes to fire protection and life safety appliances/equipment. The only landscaping should be grass or mulch no plants or shrubs. These include but not limited to: Fire hydrants, fire department connections (FDC), post indicating valves (PIV), fire sprinkler risers, fire alarm control panels and electrical room locations require a minimum 36-inch clearance path to and on all sides. Fire hydrants require 36-inch clear space each side and rear with a 60-inch wide clear access from the fire apparatus access to fire hydrant. (NFPA 1-2021 Ch. 18 Sec. 18.5.7)

DRC
PZ25-12000043
03/04/2026

WITKIN HULTS + PARTNERS
307 south 21st avenue hollywood, florida
phone: 954.923.3689 facsimile: 954.923.3689
www.witkindesign.com

©2020 WITKIN HULTS + PARTNERS
THE DESIGN AND DRAWINGS HEREIN ARE THE INTELLECTUAL PROPERTY OF THIS LANDSCAPE ARCHITECT AND ARE PROTECTED UNDER THE COPYRIGHT PROTECTION ACT

Project:
FESTIVAL FLEA MARKET SOUTH
NW 27TH AVE & NW 33RD STREET , POMPANO BEACH, FL
LANDSCAPE DETAILS

Revisions:	Date:	By:
1) Pre-app Comments	12.12.2025	MAV
2) DRC #1 – Comments	01.28.2026	MAV

Seal:
FLORIDA LANDSCAPE ARCHITECT LA 6667290 STATE OF FLORIDA
Digitally signed by Tristan E Eaton DN: CN=Tristan E Eaton, C=US, E=teaton@witkindesign.com, O=WITKIN HULTS + PARTNERS, OU=LANDSCAPE ARCHITECTURE, 0.9.2342.19200300.100.1.1=LA6667290 Date: 2026.03.04 08:14:49 -05'00'
Lic. # LA6667290
Member: A.S.L.A.

PROGRESS SET

Drawing: Landscape Details
Date: 11/05/2025
Scale: NTS
Drawn by: MAV
Sheet No.:
L-7
Cad Id.: 2025-060

Z:\2025\Active\Full Projects\Festival Flea Market South 2025\BIM\Landscape\2025-04-27 (DRC)_1.dwg Jun 26, 2026