

Digitally signed  
by George  
Balaban  
Date:  
2023.07.12  
16:57:33 -04'00'


GEORGE BALABAN, STATE OF FLORIDA, PROFESSIONAL ENGINEER, LICENSE NO. 74543

THIS ITEM HAS BEEN DIGITALLY SIGN AND SEALED BY GEORGE BALABAN,  
P.E. ON THE DATE INDICATED HERE.





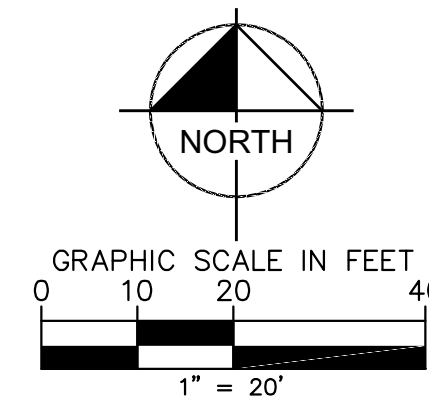








PRINTED COPIES OF THE DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

PLANS ARE IN NAVD 1988 DATUM  
CONVERSION EQUATION IS BELOW:  
(NAVD 1988) + 1.58' = (NGVD 1929)

THE PRESENCE OF GROUNDWATER SHOULD BE ANTICIPATED. CONTRACTOR'S BID SHALL INCLUDE CONSIDERATION FOR ADDRESSING THIS ISSUE AND OBTAINING ALL NECESSARY PERMITS.




### LEGEND

- |   |  |
|---|--|
|  | CENTER LINE OF ROADWAY   |
|  | RIGHT-OF-WAY OR PROPERTY LINE  |
|  | EXIST BUILDING   |
|  | PROP TYPE 'f' CURB AND GUTTER<br>PER CITY OF POMPANO BEACH<br>STANDARD DETAIL ON SHEET C2.10 |
|  | PROP TYPE 'd' CURB AND GUTTER<br>PER CITY OF POMPANO BEACH<br>STANDARD DETAIL ON SHEET C2.10 |
|  | PROP VALLEY GUTTER   |
|  | LANDSCAPING  |
|  | EXIST CONCRETE   |
|  | EXIST ASPHALT  |
|  | EXIST PAVERS   |
|  | PROP CONCRETE  |
|  | PROP PAVEMENT MARKINGS   |
|  | EXIST STREET LIGHT POLES   |

STRIPING KEY

- A = 6" SOLID WHITE  
B = 8" SOLID WHITE  
C = 12" SOLID WHITE  
D = 18" SOLID WHITE  
E = 24" SOLID WHITE  
F = 6" SKIP WHITE TYP (10'-30')  
G = 6" SKIP WHITE TYP (6'-10')  
H = 6" SKIP WHITE TYP (2'-4')  
I = 6" SOLID YELLOW  
J = 18" SOLID YELLOW  
K = 6" DOUBLE YELLOW  
L = 6" SKIP YELLOW TYP (10'-30')  
M = 6" SKIP YELLOW TYP (6'-10')  
N = 6" SKIP YELLOW TYP (2'-4')  
P = RPM BI-DIRECTIONAL AMBER/AMBER  
R = FDP WHITE  
S = FDP YELLOW  
T = RPM BI-DIRECTIONAL WHITE/RED  
U = RPM BI-DIRECTIONAL RED/YELLOW

### SIGN LEGEND

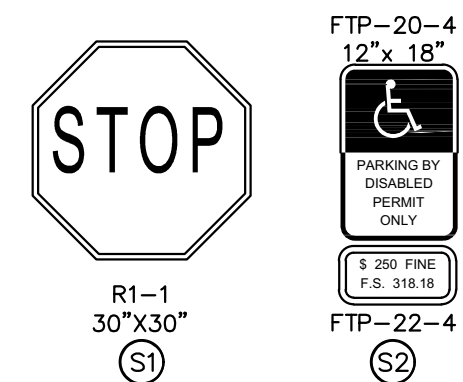

NOTES:

1. CONTRACTOR SHALL REPLACE ALL STRIPING REMOVED AND/OR DAMAGED DURING CONSTRUCTION ALONG THE ROAD ABUTTING THE PROPERTY PER APPLICABLE CITY, COUNTY, AND/OR STATE STANDARDS.
2. CONTRACTOR SHALL FIELD VERIFY THAT ALL EXISTING AND PROPOSED ADA ITEMS WITHIN PROJECT LIMITS (I.E., ROUTES, PARKING, STRIPING, SIGNAGE, ETC.) MEET THE MINIMUM REQUIREMENTS AND SHALL ADJUST ACCORDINGLY, BEFORE THE PROJECT CAN BE DEEMED CERTIFIED AND COMPLETE.
3. ALL CURB RAMPS AND DETECTABLE WARNINGS TO BE INSTALLED IN ACCORDANCE WITH FDOT STANDARD INDEX 304 (LATEST EDITION).
4. ALL SIGNS TO BE INSTALLED PER FDOT DESIGN STANDARD INDEX NO. 600 (LATEST EDITION), AND AS SHOWN ON THE PLANS UNLESS OTHERWISE NOTED.
5. ALL PAVEMENT SYMBOLS AND MARKINGS SHALL BE THERMOPLASTIC PAVEMENT MARKINGS UNLESS OTHERWISE NOTED. INSTALLATION AND MATERIALS SHALL MEET ALL REQUIREMENTS OF SECTION 711 OF FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
6. ALL PAVEMENT MARKINGS SHALL BE INSTALLED IN ACCORDANCE WITH FDOT STANDARD INDEX NO. 17346 (LATEST EDITION).
7. PAINTED PAVEMENT MARKINGS, INSTALLATION AND MATERIALS SHALL MEET ALL REQUIREMENTS OF SECTION 710 OF FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, AND THE FOLLOWING:
  - A. APPLY TWO COATS OF VOC COMPLIANT, LOCAL DOT APPROVED, UNDILUTED SOLVENT BASED OR LATEX EMULSION PAINT.
  - B. FOLLOW MANUFACTURERS RECOMMENDED APPLICATION RATE, WITHOUT THE ADDITION OF A THINNER, WITH A MAXIMUM OF 100 SF PER GALLON, OR AS REQUIRED, PROVIDING MINIMUM 25 MILS WET FILM THICKNESS AND 7.5 MILES PER GALLON PER COAT WITH MINIMUM OF 30 DAYS BETWEEN APPLICATIONS.
  - C. SECOND COAT OF PAINT SHALL NOT BE APPLIED EARLIER THAN 7 DAYS PRIOR TO GRAND OPENING.
  - D. PAINT SHALL BE CRISP, STRAIGHT, AND APPLIED UNIFORMLY ACROSS THE WIDTH OF THE LINE FOR A TOTAL DRY FILM THICKNESS OF 15 MILS.
9. CONTRACTOR SHALL NOT ALLOW TRAFFIC ONTO NEWLY APPLIED PAVEMENT STRIPING/ MARKINGS UNTIL THEY ARE SUFFICIENTLY DRY TO PERMIT VEHICLES TO CROSS THEM WITHOUT DAMAGE. THE CONTRACTOR SHALL, AT HIS OWN EXPENSE, REMOVE AND REPAIR ANY PORTION OF THE PAVEMENT STRIPING/MARKINGS DAMAGED BY PASSING TRAFFIC OR ANY OTHER CAUSE.
10. SIGNS SHALL BE IN ACCORDANCE WITH SECTION NO. 700, HIGHWAY SIGNING, OF THE FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
11. TRAFFIC SIGNS SHALL BE INSTALLED IN ACCORDANCE WITH THE U.S. DEPARTMENT OF TRANSPORTATION MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (MUTCD), PART II, AND IN THE LOCATIONS SHOWN ON PLANS.
12. PARKING STALL MARKINGS DEPICTED ON PLAN ARE FOR GRAPHICAL PURPOSES ONLY.
13. ALL EXISTING SIGNALIZATION EQUIPMENT TO REMAIN IS ASSUMED TO BE IN GOOD WORKING ORDER UNLESS NOTED IS NOTIFIED IN WRITING PRIOR TO THE START OF CONSTRUCTION. ANY SUBSEQUENT DAMAGE TO THE SIGNAL EQUIPMENT SHALL BE REPAIRED BY THE CONTRACTOR AT THE CONTRACTOR'S EXPENSE.
14. INSTALL YELLOW REFLECTIVE PAINT ON ALL MEDIAN NOSES PER BROWARD COUNTY TRAFFIC ENGINEERING DIVISION STANDARDS.
15. EXISTING MARKING SHALL BE REMOVED BY WATER BLASTING OR SAND BLASTING ONLY.
16. CONTRACTOR TO COORDINATE WITH ARCHITECT PRIOR TO ALL PEDESTRIAN LIGHTS INSTALLATION.
17. ALL RADII IS 3' UNLESS OTHERWISE NOTED.

## SIGNAGE & MARKING PLAN

**BREW FISH  
BREWERY**  
PREPARED FOR  
**OF POMPANO BEACH**  
POMPANO BEACH

**Kimley»»Horn**

© 2023 KIMLEY-HORN AND ASSOCIATES, INC.  
8201 PETERS ROAD, SUITE 2200, PLANTATION, FL 33322  
PHONE: 954-535-5100 FAX: 954-739-2247  
WWW.KIMLEY-HORN.COM REGISTRY No. 35106

LICENSED PROFESSIONAL  
GEORGE BALABAN, P.E.  
FL LICENSE NUMBER  
74543  
TF: 07/07/2023

KHA PROJECT 044203010	DATE JULY 2023	SCALE AS SHOWN	DESIGNED BY TVC	DRAWN BY TVC	CHECKED BY GR
--------------------------	-------------------	----------------	-----------------	--------------	---------------

**BREW FISH  
BREWERY**

PREPARED FOR

## OF POMPANO BEACH

SHEET NUMBER

Always call 811 two full business days before you dig. You will have underground utilities located and marked.

**Sunshine811.com**

PZ23-12000029.00

09/20/2023