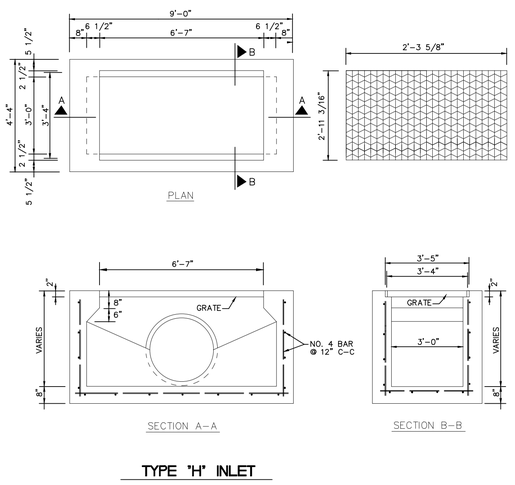

TYPE "H" INLET

RECOMMENDED MAXIMUM PIPE SIZE
2'-0" WALL-18" PIPE
3'-1" WALL-24" PIPE

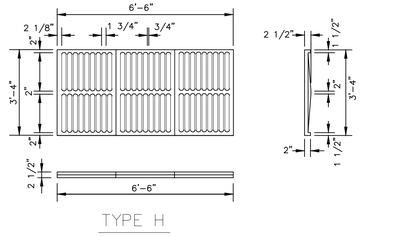

CAST IRON GRATES

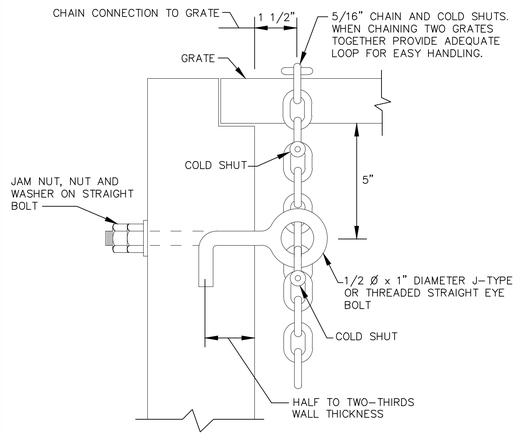

NOTE: WHEN ALTERNATE "G" GRATE IS SPECIFIED, THE CHAIN, BOLT, NUTS, WASHER AND COLD SHUTS SHALL BE GALVANIZED IN ACCORDANCE WITH THE SPECIFICATIONS FOR THE GRATE.

COST OF EYE BOLT AND CHAIN TO BE INCLUDED IN THE CONTRACT UNIT PRICE FOR INLETS.

EYE BOLT AND CHAIN FOR LOCKING GRATES

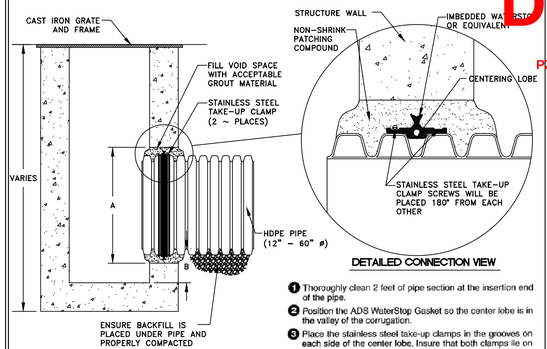

INSTALLATION RECOMMENDATIONS

PIPE SIZE (IN)	PIPE OD (IN) A-PROFILE	PIPE OD (IN) N-PROFILE	"A" MIN. HOLE #	"B" MIN. DISTANCE PIPE INVERT TO STRUCUTRE INVERT (IN)
12	14.5	14.2	19/80	3.7
15	17.6	17.8	23.00	4.0
18	21.2	21.5	26.50	4.2
24	27.8	28.4	33.25	4.5
30	35.1	35.5	40.50	5.2
36	41.1	41.4	47.00	5.5
42	47.7	48.0	53.00	5.7
48	53.6	54.0	59.00	5.7
60	66.3	67.3	72.00	6.4

1. Thoroughly clean 2 feet of pipe section at the insertion end of the pipe.
2. Position the ADS WaterStop Gasket so the center lobe is in the valley of the corrugation.
3. Place the stainless steel take-up clamps in the grooves on each side of the center lobe. Insure that both clamps lie on the crest of the pipe corrugations.
4. Position the take-up clamp screws 180° from each other. Using a torque ratchet or torque wrench, gradually tighten both screws of each clamp to 60 lbs./inch torque. Do not overtighten. A screw driver will not tighten clamps adequately.
5. Apply a good quality concrete bonding agent to the structure opening.
6. Insert pipe into the structure opening. Make sure that the ADS WaterStop is fully within the plane of the structure's wall. **If mortaring in place,** apply and compact non-shrink grout around the ADS WaterStop and between the pipe and the opening, taking care to fill the voids. Make sure that the ADS WaterStop Gasket does not contact the bare structure walls. **If pouring in place,** use concrete of sufficient slump to permit complete flow around the pipe and ADS WaterStop. Thoroughly vibrate all around the pipe and ADS WaterStop Gasket to complete compaction and to release any trapped air.
7. Allow concrete or mortar to fully cure before testing or backfilling. If the system is to be tested, testing should be completed prior to backfilling around the structure, following all recommendations and requirements of the test system manufacturer. Plug any vent holes in the N-12 pipe prior to testing.
8. Backfill the N-12 pipe following recommendations in ADS Product Note 3.115, *Installing N-12 Storm, Sanitary Sewer and Culvert Pipe.*

WATER STOP SEAL

ENGINEERING STANDARDS 2022					
REVISIONS BY	DATE	ENGINEERING DIVISION CITY OF POMPANO BEACH	TYPE "H" INLET	DATE: JUNE 2022	
S.S.	09-11	SCALE: N.T.S.		DWG. NO.	403-1

ENGINEERING STANDARDS 2022					
REVISIONS BY	DATE	ENGINEERING DIVISION CITY OF POMPANO BEACH	CAST IRON GRATES	DATE: JUNE 2022	
		SCALE: N.T.S.		DWG. NO.	410-1

ENGINEERING STANDARDS 2022					
REVISIONS BY	DATE	ENGINEERING DIVISION CITY OF POMPANO BEACH	EYE BOLT AND CHAIN	DATE: JUNE 2022	
		SCALE: N.T.S.		DWG. NO.	413-1

ENGINEERING STANDARDS 2022					
REVISIONS BY	DATE	ENGINEERING DIVISION CITY OF POMPANO BEACH	WATER STOP SEAL	DATE: MAY 2022	
TCW	04-08	SCALE: N.T.S.		DWG. NO.	414-1

DRC PZ25-12000010 08/06/2025

KEITH
301 East Atlantic Blvd.
Pompano Beach, FL 33060
PH: (954) 788-3400
Florida Engineering Business License: CA7928
Florida Surveyor and Mapper Business License: LB6860
Florida Landscape Architecture Business License: LC26000457

Plotted by: bbaldwin On 4/15/2025 5:52 PM

REVISIONS

NO.	DESCRIPTION	DATE

RESPONSIBILITY FOR THE USE OF THESE PLANS PRIOR TO OBTAINING PERMITS FROM ALL AGENCIES HAVING JURISDICTION OVER THE PROJECT WILL FALL SOLELY UPON THE USER.

ISSUE DATE:	02/25/25
DESIGNED BY:	BB
DRAWN BY:	BB/FA
CHECKED BY:	NW
BID-CONTRACT:	

This item has been digitally signed and sealed by **NILES T. WARRICK, P.E.** on the date adjacent to the seal.

NILES T. WARRICK LICENSE No. 94320 STATE OF FLORIDA PROFESSIONAL ENGINEER

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

2025.04.15 23:05:37-04'00'

NILES T. WARRICK, P.E.
FLORIDA REG. NO. 94320
(FOR THE FIRM)

CLIENT

PORTMAN HOLDINGS

PROJECT

2400 E ATLANTIC
2400 East Atlantic Blvd.
Pompano Beach, FL

SHEET TITLE

WATER AND SEWER DETAILS

SHEET NUMBER	CU-506
PROJECT NUMBER	14267.00

Drawing name: H:\14267.00 - 2400 E Atlantic - Portman Holdings\Engineering\Cadd\14267.00-CU-5XX.dwg

STATUS: DRC SET