


NOTES

- INDICATED DIMENSION BY LOCAL ZONING ORDINANCE.
- CURBING APPLIES TO ALL PARKING.
- EACH SPACE SHALL BE DESIGNATED BY FOUR 4 INCH WIDE VISIBLE STRIPING CONSISTING OF WHITE PAINT OR AS APPROVED BY THE CITY.

ENGINEERING STANDARDS 2022

REVISIONS	BY	DATE	ENGINEERING DIVISION CITY OF POMPAÑO BEACH	STANDARD PARKING SPACES	DATE: MAY 2022 DWG. NO.
			SCALE: N.T.S.		300-3

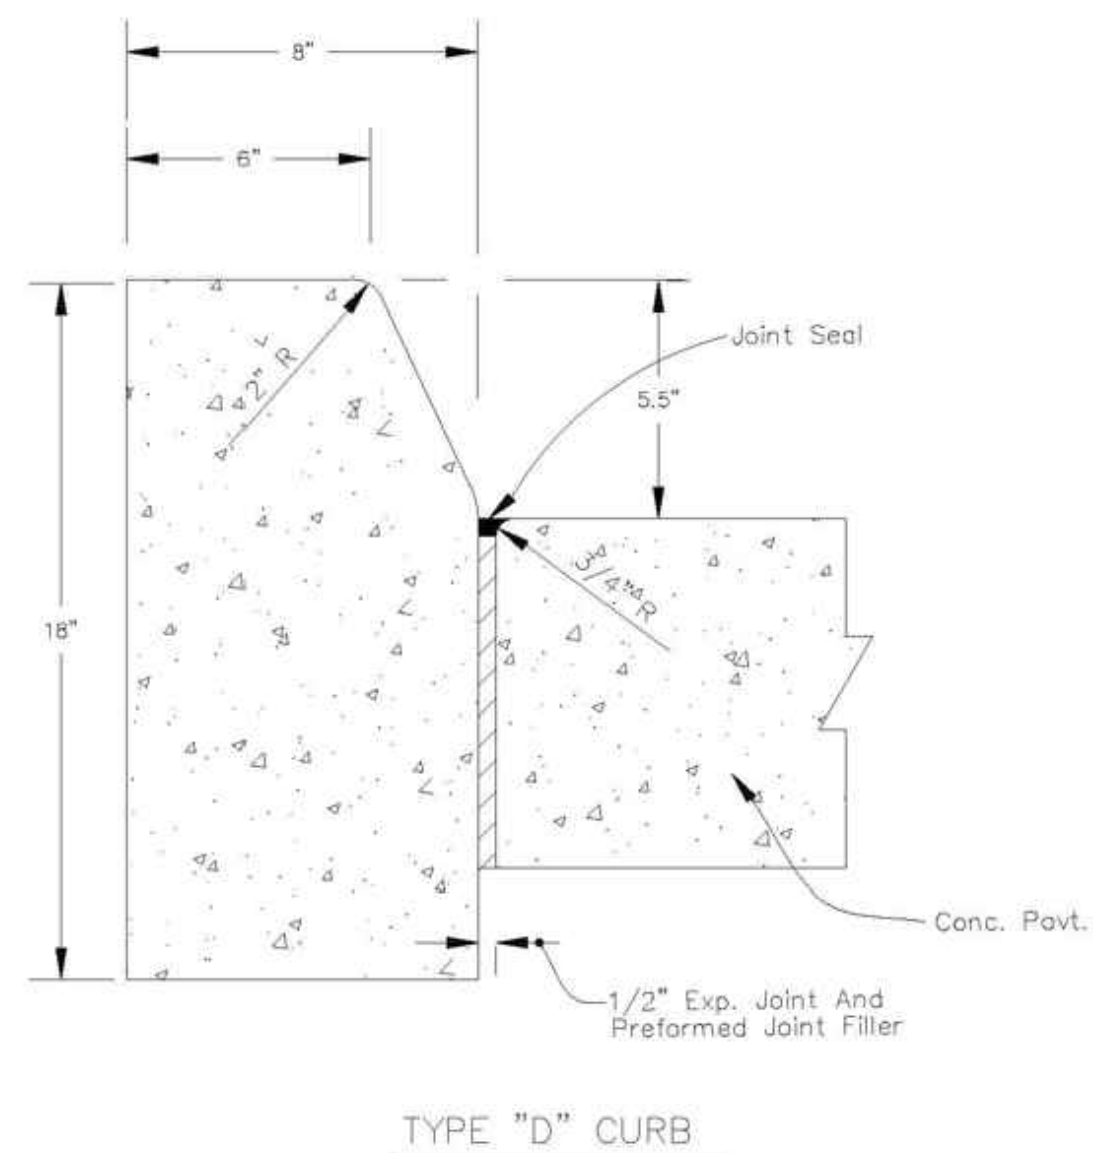

TYPE "D" CURB


NOTE

FOR USE ADJACENT TO CONCRETE OR FLEXIBLE PAVEMENT, CONCRETE SHOWN. EXPANSION JOINT, PREFORMED JOINT FILLER AND JOINT SEAL ARE REQUIRED BETWEEN CURBS AND CONCRETE PAVEMENT ONLY.

CONCRETE CURB DETAIL

ENGINEERING STANDARDS 2022


REVISIONS	BY	DATE	ENGINEERING DIVISION CITY OF POMPAÑO BEACH	CONCRETE CURB	DATE: MAY 2022 DWG. NO.
			SCALE: N.T.S.		300-2

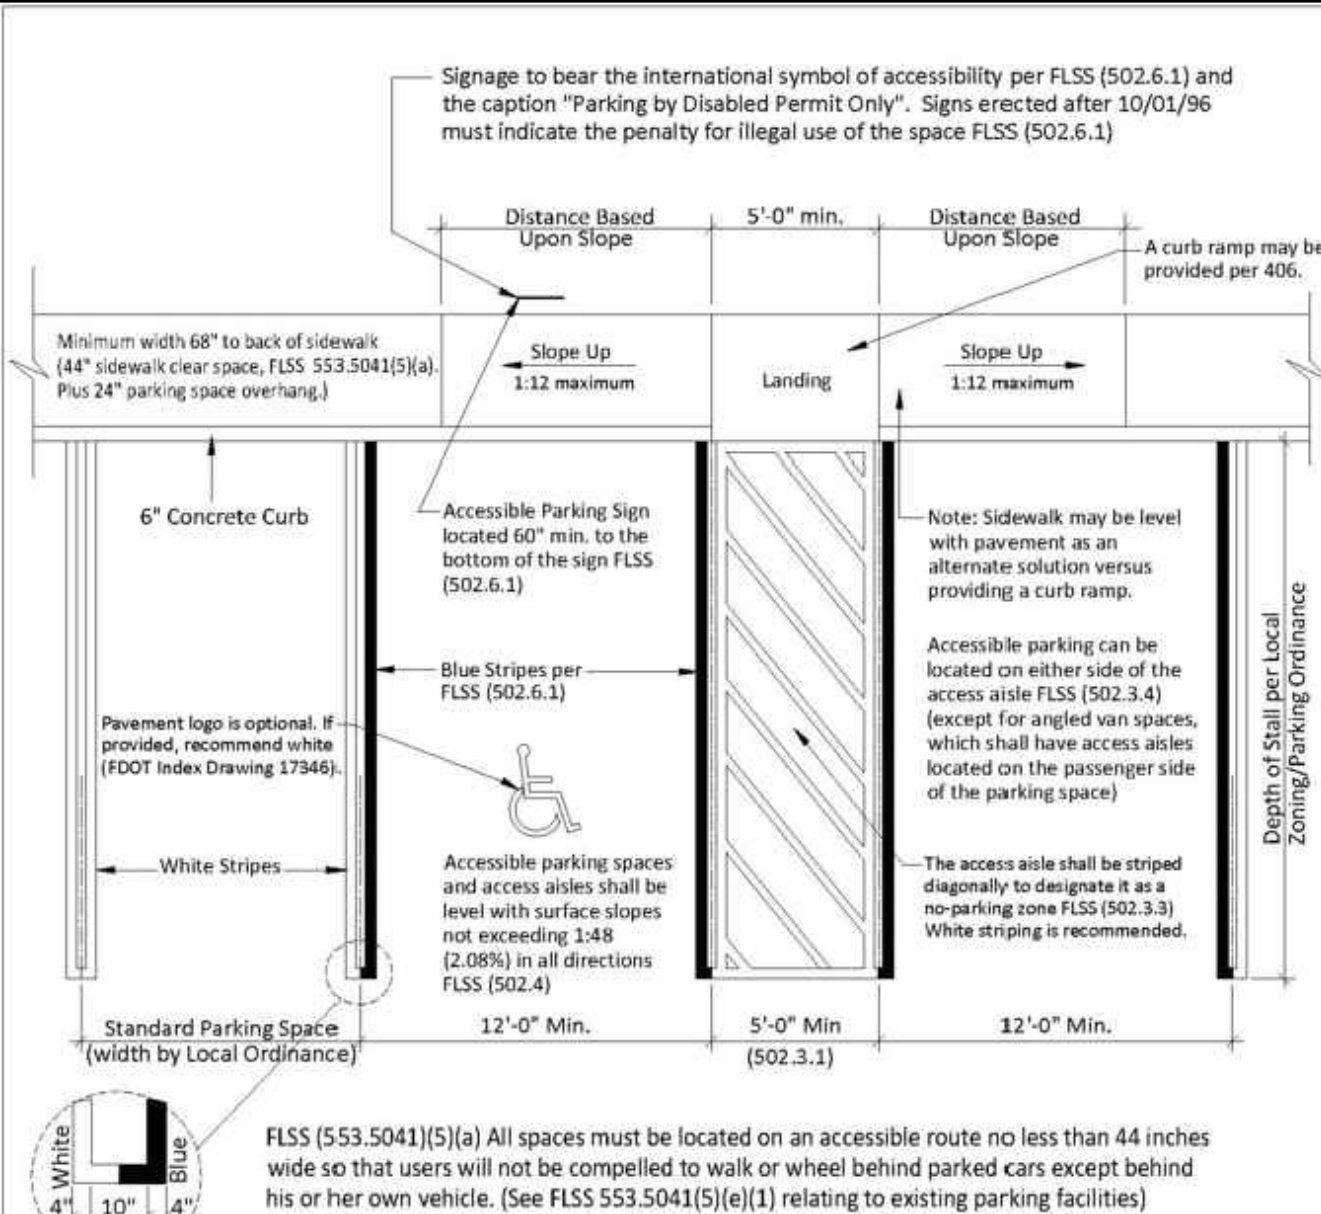Recommended Accessible Parking Space(s)
Design for Double Line Requirements

THIS TECHNICAL ASSISTANCE DOCUMENT IS INTENDED TO PROVIDE INFORMAL GUIDANCE AND DOES NOT CONSTITUTE A LEGAL INTERPRETATION OF STATUTORY OR REGULATORY CRITERIA.

ENGINEERING STANDARDS 2022

REVISIONS	BY	DATE	ENGINEERING DIVISION CITY OF POMPAÑO BEACH	ACCESSIBLE PARKING SPACES	DATE: MAY 2022 DWG. NO.
			SCALE: N.T.S.		300-4

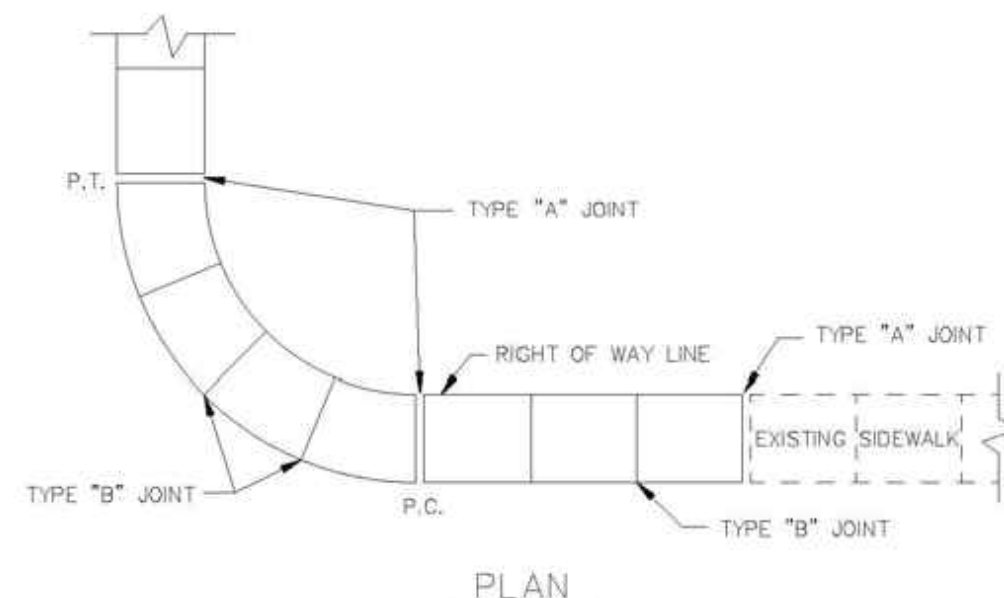


PLAN

TYPICAL SIDEWALK SECTION

SIDEWALK DETAILS

ENGINEERING STANDARDS 2022

REVISIONS	BY	DATE	ENGINEERING DIVISION CITY OF POMPAÑO BEACH	SIDEWALK DETAILS	DATE: JUNE 2022 DWG. NO.
			SCALE: N.T.S.		301-1

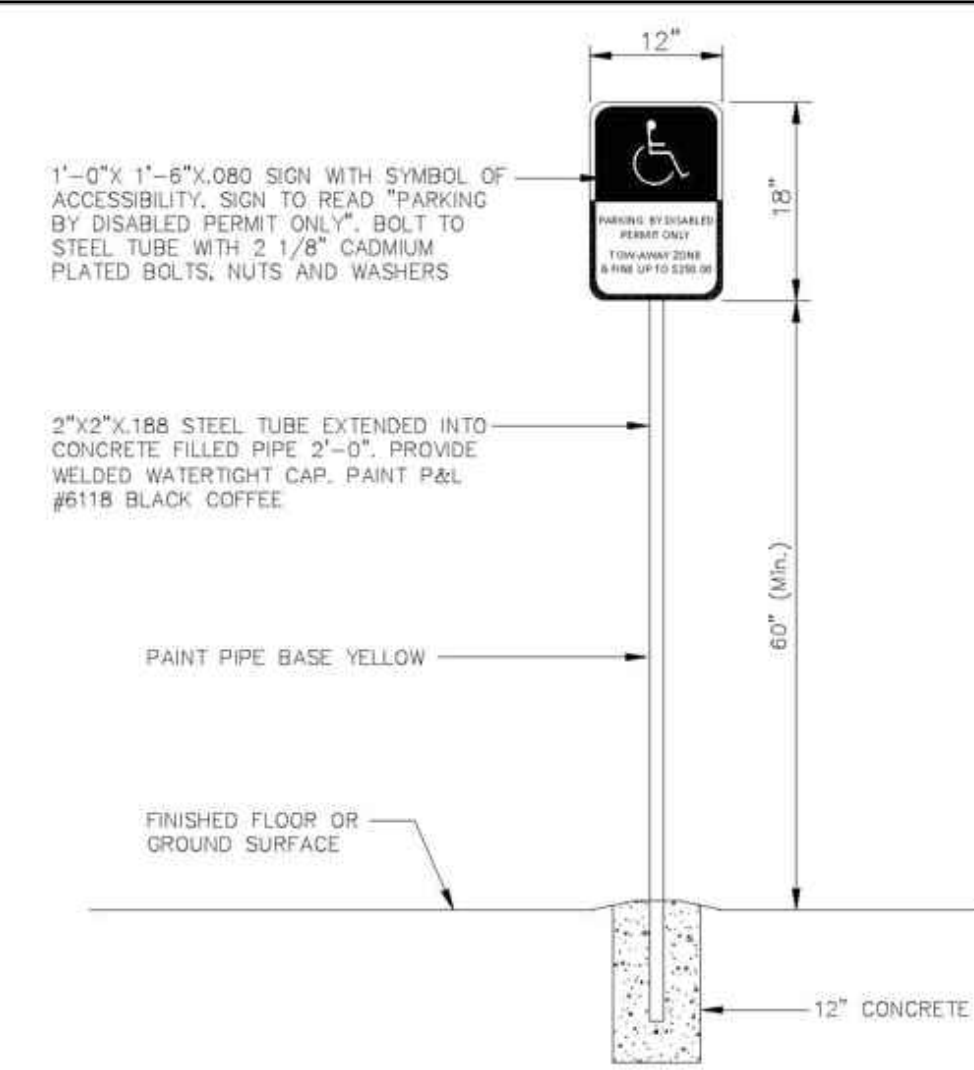

ACCESSIBLE PARKING SPACE SIGN


SIGN NOTE

ACCESSIBLE PARKING SPACES SHALL BE POSTED WITH A FIXED PARKING SIGN NO LESS THAN 60" MIN. TO THE BOTTOM OF THE SIGN AND WHICH BEARS THE INTERNATIONAL SYMBOL OF ACCESSIBILITY MEETING THE REQUIREMENTS OF THE STANDARDS AND THE CAPTION "PARKING BY DISABLED PERMIT ONLY," AND MUST INDICATE THE PENALTY FOR ILLEGAL USE OF THE SPACE.


ENGINEERING STANDARDS 2022

REVISIONS	BY	DATE	ENGINEERING DIVISION CITY OF POMPAÑO BEACH	ACCESSIBLE SPACE SIGN	DATE: MAY 2022 DWG. NO.
			SCALE: N.T.S.		300-5


TABLE OF SIDEWALK JOINTS	
TYPE	LOCATION
"A"	JOINT SHALL BE PLACED AT P.C. AND P.T. OF CURVES, JUNCTION OF EXISTING SIDEWALKS, EVERY 60' ON NEW SIDEWALKS AND WHERE SIDEWALKS ABUT CONCRETE CURBS, DRIVEWAYS AND SIMILAR STRUCTURES.
"B"	JOINT SHALL BE PLACED 5'-0" CENTER
"C"	JOINT SHALL BE PLACED AT 20' INTERVALS

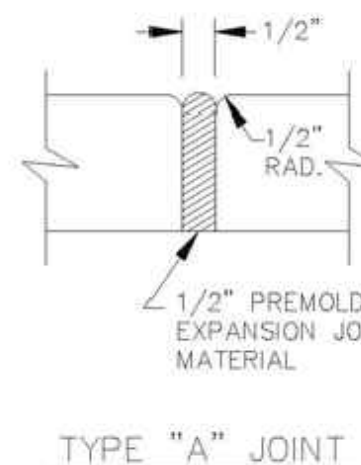

TYPE "A" JOINT

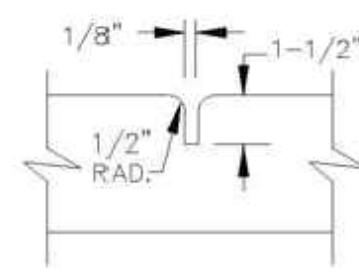

TYPE "B" JOINT

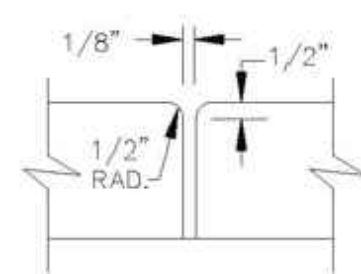


TYPE "C" JOINT

NOTE: SIDEWALK SHALL BE 4" THICK EXCEPT IN DRIVEWAYS WHERE THE THICKNESS SHALL BE 6".

SIDEWALK DETAILS


ENGINEERING STANDARDS 2022

REVISIONS	BY	DATE	ENGINEERING DIVISION CITY OF POMPAÑO BEACH	SIDEWALK DETAILS	DATE: JUNE 2022 DWG. NO.
			SCALE: N.T.S.		301-2

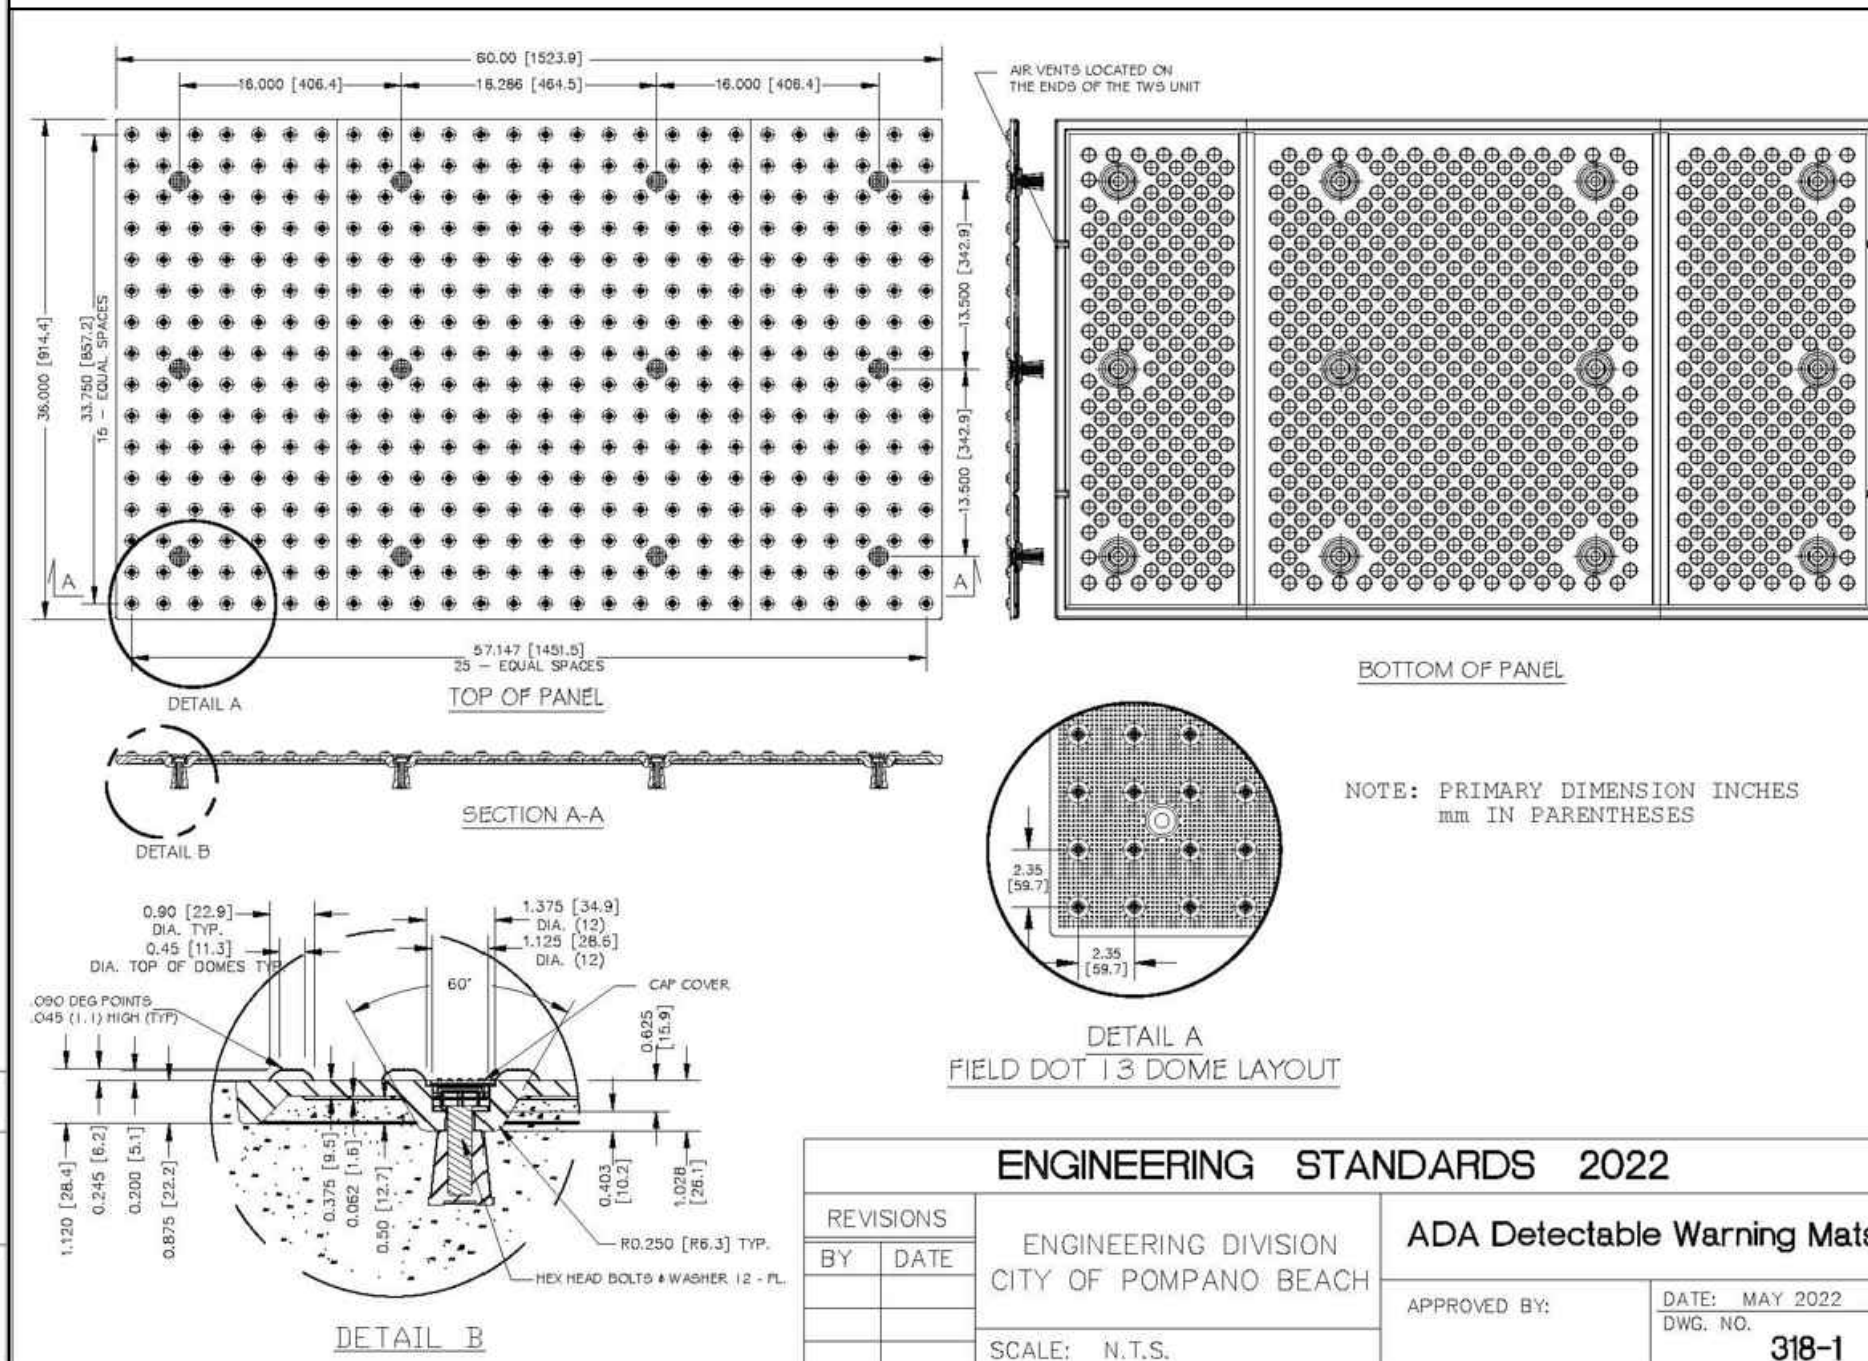


ENGINEERING STANDARDS 2022

REVISIONS	BY	DATE	ENGINEERING DIVISION CITY OF POMPAÑO BEACH	ADA Detectable Warning Mats	DATE: MAY 2022 DWG. NO.
			SCALE: N.T.S.		318-1

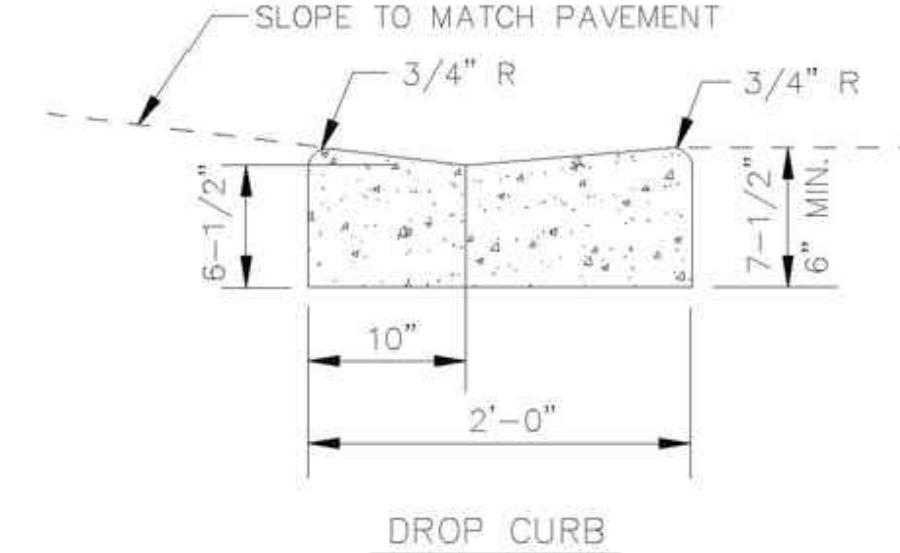

DROP CURB

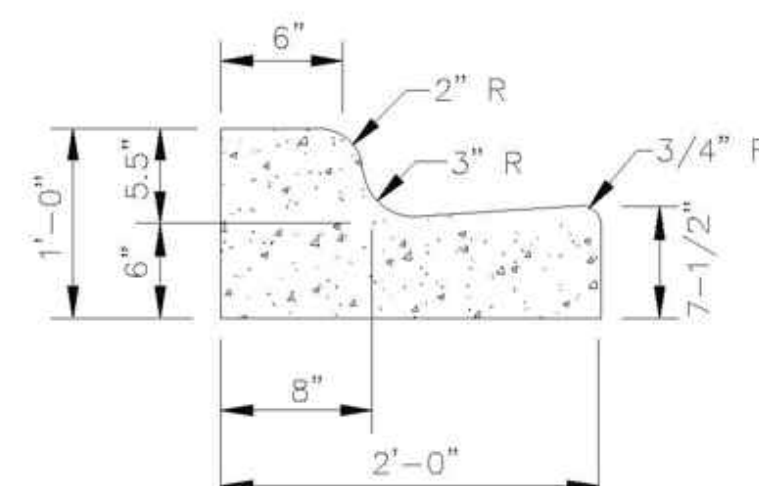

TYPE "F" CURB & GUTTER

CONCRETE CURB AND GUTTER DETAIL

ENGINEERING STANDARDS 2022

REVISIONS	BY	DATE	ENGINEERING DIVISION CITY OF POMPAÑO BEACH	CONCRETE CURB AND GUTTER	DATE: MAY 2022 DWG. NO.
			SCALE: N.T.S.		300-1

REVISIONS

SEAL