

GENERAL NOTES AND SPECIFICATIONS

I. APPLICABLE CODES

1. ALL WORK AND MATERIALS SHALL CONFORM TO CURRENT CITY OF POMPAÑO BEACH STANDARDS AND SPECIFICATIONS AS WELL AS ALL LOCAL, STATE, AND NATIONAL CODES AND REGULATORY REQUIREMENTS, AS APPLICABLE.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ENSURING THAT ALL CONSTRUCTION SHALL BE DONE IN A SAFE MANNER AND IN STRICT COMPLIANCE WITH ALL THE REQUIREMENTS OF FEDERAL OCCUPATIONAL SAFETY AND HEALTH ACT OF 1970, AND ALL STATE AND LOCAL SAFETY AND HEALTH REGULATIONS.
3. LOCATIONS, ELEVATIONS AND DIMENSIONS OF EXISTING UTILITIES, STRUCTURES AND OTHER SITE FEATURES SHOWN ON THE DRAWINGS WERE OBTAINED FROM THE BOUNDARY SURVEY BY:
- PULICE LAND SURVEYORS, INC.
5381 NOB HILL ROAD
SUNRISE, FLORIDA 33351
(954) 572-1777
surveys@pulicelandsurveyors.com
4. ELEVATIONS SHOWN HEREON RELATE TO NAVD88 DATUM
5. PROPOSED ELEVATIONS SHOWN ARE FINISHED GRADES.
6. EXISTING UTILITIES TO BE ADJUSTED IN ACCORDANCE WITH PROPOSED GRADES AND REQUIREMENTS OF UTILITY OWNERS, AS REQUIRED.
7. EXISTING STRUCTURES, TREES, UTILITIES AND OTHER IMPROVEMENTS WHICH ARE TO REMAIN IN PLACE SUCH AS BUILDING SEWERS, DRAINS, WATER OR GAS PIPES, CONDUITS, POLES, WALLS, COLUMNS, ETC., WHETHER OR NOT SHOWN ON THE PLANS, ARE TO BE CAREFULLY PROTECTED FROM DAMAGE. IF DAMAGE OCCURS FROM WORK PERFORMED UNDER THIS CONTRACT, THE CONTRACTOR SHALL PROMPTLY REPAIR THE DAMAGED ITEM(S) TO THE CONDITION OF THE ITEM(S) PRIOR TO THE DAMAGE. THIS WORK SHALL BE AT NO ADDITIONAL COST TO THE OWNER.
8. THE CONTRACTOR IS TO USE CAUTION WHEN WORKING IN OR AROUND AREAS OF OVERHEAD TRANSMISSION LINES AND UNDERGROUND UTILITIES.
9. CONTRACTOR SHALL PRESERVE ALL STREET SIGNS, PARKING METERS, BENCHES, TRAFFIC CONTROL SIGNS, ETC. WHEN DIRECTED BY THE ENGINEER, THE CONTRACTOR SHALL REINSTALL OR DELIVER SAID PUBLIC PROPERTY TO THE COUNTY YARD.
10. THE CONTRACTOR SHALL COORDINATE HIS/HER WORK WITH ANY OTHER UTILITY AND BUILDING TRADES WORKING ON THIS OR ADJACENT PROJECT.
11. ALL DITCH EXCAVATION SHALL BE PERFORMED IN FULL COMPLIANCE WITH THE PROVISIONS OF THE FLORIDA TRENCH SAFETY ACT.
12. THE CONTRACTOR SHALL TAKE SPECIAL NOTE OF SOIL CONDITIONS THROUGHOUT THIS PROJECT. ANY SPECIAL SHORING, SHIELDING OR OTHER PRECAUTIONS NECESSARY TO PROTECT ADJACENT PROPERTY, EITHER PUBLIC OR PRIVATE, DURING EXCAVATION OF SUBSOIL MATERIAL OR DURING THE FILLING OF ANY AREA, OR FOR ANY OPERATION DURING CONSTRUCTION SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
13. THE CONTRACTOR AND SUBCONTRACTORS SHALL OBTAIN A COPY OF THE FDOT "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION" (LATEST EDITION), CITY OF STANDARDS CAPE CORAL AND SPECIFICATIONS, AND ALL OTHER APPLICABLE STANDARD AND/OR SPECIFICATIONS PERTAINING TO THE PROPOSED WORK AND BECOME FAMILIAR WITH THE CONTENTS PRIOR TO COMMENCING WORK. UNLESS OTHERWISE NOTED, ALL WORK SHALL CONFORM AS APPLICABLE TO THESE STANDARDS AND SPECIFICATIONS.
14. THE CONTRACTOR SHALL BE RESPONSIBLE FOR FURNISHING ALL MATERIAL AND LABOR TO CONSTRUCT THE FACILITY AS SHOWN AND DESCRIBED IN THE CONSTRUCTION DOCUMENTS IN ACCORDANCE WITH THE APPROPRIATE APPROVING AUTHORITIES, SPECIFICATIONS AND REQUIREMENTS. CONTRACTOR SHALL CLEAR AND GRUB ALL AREAS UNLESS OTHERWISE INDICATED, REMOVING TREES, STUMPS, ROOTS, MUCK, EXISTING PAVEMENT AND ALL OTHER DELETERIOUS MATERIAL.
15. EXISTING UTILITIES SHOWN ARE LOCATED ACCORDING TO THE INFORMATION AVAILABLE TO THE ENGINEER AT THE TIME OF THE TOPOGRAPHIC SURVEY AND HAVE NOT BEEN INDEPENDENTLY VERIFIED BY THE OWNER OR THE ENGINEER. GUARANTEE IS NOT MADE THAT ALL EXISTING UNDERGROUND UTILITIES ARE SHOWN OR THAT THE LOCATION OF THOSE SHOWN ARE ENTIRELY ACCURATE. FINDING THE ACTUAL LOCATION OF ANY EXISTING UTILITIES IS THE CONTRACTOR'S RESPONSIBILITY AND SHALL BE DONE BEFORE COMMENCING ANY WORK IN THE VICINITY. FURTHERMORE, THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR ANY AND ALL DAMAGES DUE TO THE CONTRACTOR'S FAILURE TO EXACTLY LOCATE AND PRESERVE ANY AND ALL UNDERGROUND UTILITIES. THE OWNER OR ENGINEER WILL ASSUME NO LIABILITY FOR ANY DAMAGES SUSTAINED OR COST INCURRED BECAUSE OF THE OPERATIONS IN THE VICINITY OF EXISTING UTILITIES OR STRUCTURES, NOR FOR TEMPORARY BRACING AND SHORING OF SAME. IF IT IS NECESSARY TO SHORE, BRACE, SWING OR RELOCATE A UTILITY, THE UTILITY COMPANY OR DEPARTMENT AFFECTED SHALL BE CONTACTED AND THEIR PERMISSION OBTAINED REGARDING THE METHOD TO USE FOR SUCH WORK.
16. IT IS THE CONTRACTOR'S RESPONSIBILITY TO CONTACT THE VARIOUS UTILITY COMPANIES WHICH MAY HAVE BURIED OR AERIAL UTILITIES WITHIN OR NEAR THE CONSTRUCTION AREA BEFORE COMMENCING WORK. THE CONTRACTOR SHALL PROVIDE 48 HOURS MINIMUM NOTICE TO ALL UTILITY COMPANIES PRIOR TO BEGINNING CONSTRUCTION. AN APPROXIMATE LIST OF THE UTILITY COMPANIES WHICH THE CONTRACTOR MUST CALL BEFORE COMMENCING WORK IS PROVIDED ON THE COVER SHEET OF THESE CONSTRUCTION PLANS. THIS LIST SERVES AS A GUIDE ONLY AND IS NOT INTENDED TO LIMIT THE UTILITY COMPANIES WHICH THE CONTRACTOR MAY WSH TO NOTIFY.
17. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL REQUIRED CONSTRUCTION PERMITS AND BONDS IF REQUIRED PRIOR TO CONSTRUCTION.
18. THE CONTRACTOR SHALL HAVE AVAILABLE AT THE JOB SITE AT ALL TIMES ONE COPY OF THE CONSTRUCTION DOCUMENTS INCLUDING PLANS, SPECIFICATIONS, GEOTECHNICAL REPORT AND SPECIAL CONDITIONS AND COPIES OF ANY REQUIRED CONSTRUCTION PERMITS.
19. ANY DISCREPANCIES ON THE DRAWINGS SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE OWNER AND ENGINEER BEFORE COMMENCING WORK. NO FIELD CHANGES OR DEVIATIONS FROM DESIGN ARE TO BE MADE WITHOUT PRIOR APPROVAL OF THE OWNER AND NOTIFICATION TO THE ENGINEER.
20. ALL COPIES OF COMPACTION, CONCRETE AND OTHER REQUIRED TEST RESULTS ARE TO BE SENT TO THE OWNER AND DESIGN ENGINEER OF RECORD DIRECTLY FROM THE TESTING AGENCY.
21. THE CONTRACTOR SHALL BE RESPONSIBLE FOR SUBMITTING TO THE ENGINEER A CERTIFIED RECORD SURVEY SIGNED AND SEALED BY A PROFESSIONAL LAND SURVEYOR REGISTERED IN THE STATE OF FLORIDA DEPICTING THE ACTUAL FIELD LOCATION OF ALL CONSTRUCTED IMPROVEMENTS THAT ARE REQUIRED BY THE JURISDICTIONAL AGENCIES FOR THE CERTIFICATION PROCESS. ALL SURVEY COSTS WILL BE THE CONTRACTORS RESPONSIBILITY.
22. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DOCUMENTING AND MAINTAINING AS-BUILT INFORMATION WHICH SHALL BE RECORDED AS CONSTRUCTION PROGRESSES OR AT THE COMPLETION OF APPROPRIATE CONSTRUCTION INTERVALS AND SHALL BE RESPONSIBLE FOR PROVIDING AS-BUILT DRAWINGS TO THE OWNER FOR THE PURPOSE OF CERTIFICATION TO JURISDICTIONAL AGENCIES AS REQUIRED. ALL AS-BUILT DATA SHALL BE COLLECTED BY A STATE OF FLORIDA PROFESSIONAL LAND SURVEYOR WHOSE SERVICES ARE ENGAGED BY THE CONTRACTOR.
23. ANY WELLS DISCOVERED ON SITE THAT WILL HAVE NO USE MUST BE PLUGGED BY A LICENSED WELL DRILLING CONTRACTOR IN A MANNER APPROVED BY ALL JURISDICTIONAL AGENCIES. CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ANY WELL ABANDONMENT PERMITS REQUIRED.
24. ANY WELL DISCOVERED DURING EARTH MOVING OR EXCAVATION SHALL BE REPORTED TO THE APPROPRIATE JURISDICTIONAL AGENCIES WITHIN 24 HOURS AFTER DISCOVERY IS MADE.
25. ANY WELL TO REMAIN SHALL BE ADJUSTED TO GRADE BY THE CONTRACTOR.
26. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING THAT THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS DO NOT CONFLICT WITH ANY KNOWN EXISTING OR OTHER PROPOSED IMPROVEMENTS. IF ANY CONFLICTS ARE DISCOVERED, THE CONTRACTOR SHALL NOTIFY THE OWNER PRIOR TO INSTALLATION OF ANY PORTION OF THE SITE WORK THAT WOULD BE AFFECTED. FAILURE TO NOTIFY OWNER OF AN IDENTIFIABLE CONFLICT PRIOR TO PROCEEDING WITH INSTALLATION LIVES OWNER OF ANY OBLIGATION TO PAY FOR A RELATED CHANGE ORDER.

II. PRECONSTRUCTION RESPONSIBILITIES

1. THE INFORMATION PROVIDED IN THESE PLANS IS TO ASSIST THE CONTRACTOR IN ASSESSING THE NATURE AND EXTENT OF THE CONDITIONS WHICH MAY BE ENCOUNTERED DURING THE COURSE OF THE WORK. ALL CONTRACTORS ARE DIRECTED, PRIOR TO BIDDING, TO CONDUCT ANY INVESTIGATIONS THEY DEEM NECESSARY TO ARRIVE AT THEIR OWN CONCLUSIONS REGARDING THE ACTUAL CONDITIONS THAT WILL BE ENCOUNTERED AND UPON WHICH THEIR BIDS WILL BE BASED.
2. TWO (2) BUSINESS DAYS BEFORE BEGINNING CONSTRUCTION IN THE AREA, THE CONTRACTOR SHALL NOTIFY SUNSHINE STATE CALL ONE OF FLORIDA, INC. AT 811 AND ANY OTHER UTILITY COMPANIES WHICH MIGHT BE AFFECTED.
3. UPON THE RECEIPT OF THE "NOTICE TO PROCEED", THE CONTRACTOR SHALL CONTACT THE ENGINEER OF RECORD AND ARRANGE A PRECONSTRUCTION CONFERENCE TO INCLUDE ALL INVOLVED GOVERNMENTAL AGENCIES, UTILITY OWNERS, THE OWNER, AND THE ENGINEER OF RECORD.
4. THE CONTRACTOR SHALL APPLY FOR AND PROCURE ALL PERMITS AND LICENSES, PAY ALL CHARGES, TAXES, ROYALTIES & FEES, AND GIVE ALL NOTICES NECESSARY TO COMPLETE THIS PROJECT.
5. THE CONTRACTORS SHALL COORDINATE WITH UTILITY COMPANIES TO ARRANGE FOR ANY REMOVAL, RELOCATION AND TEMPORARY SUPPORT OF UTILITY FEATURES, ETC. AS NECESSARY TO COMPLETE THE WORK, IF APPLICABLE.
6. THE LOCATIONS OF THE UTILITIES SHOWN IN THE PLANS ARE APPROXIMATE ONLY. THE CONTRACTOR SHALL LOCATE AND EXPOSE ALL EXISTING UTILITIES TO BE CONNECTED SUFFICIENTLY AHEAD OF CONSTRUCTION TO ALLOW REDESIGN BY THE ENGINEER IF SUCH UTILITIES ARE FOUND TO BE DIFFERENT THAN THOSE SHOWN ON PLANS.

III. OBSERVATIONS AND TESTING

1. THE CONTRACTOR SHALL NOTIFY THE ENGINEER OF RECORD AT LEAST 2 BUSINESS DAYS IN ADVANCE OF PERFORMING ALL CIVIL RELATED TESTS, UNLESS AUTHORIZED BY THE ENGINEER OF RECORD. THE CONTRACTOR SHALL NOT PROCEED WITH TESTING UNLESS THE ENGINEER OR A DESIGNATED REPRESENTATIVE IS PRESENT TO WITNESS THE TESTS.
2. THE ENGINEER OF RECORD WILL REQUIRE THAT THE FOLLOWING TESTS BE PERFORMED WITH ACCEPTABLE RESULTS:
- A. SANITARY SEWAGE COLLECTION SYSTEM:
- I. LAMPING TEST FROM MANHOLE TO MANHOLE, INCLUDING CONNECTING MANHOLE
- II. INFILTRATION/EXFILTRATION TEST UP TO THE CONNECTING MANHOLE
- III. PRESSURE TEST AS REQUIRED BY FDEP
- B. STORM DRAINAGE--(EXFILTRATION TRENCH DEPTH)
- I. EXFILTRATION TRENCH DEPTH
- II. LAMPING TEST FROM MANHOLE TO MANHOLE, INCLUDING CONNECTING MANHOLE (IF APPLICABLE)
- C. DRAINAGE WELL SPECIFIC CAPACITY TEST.
- D. WATER SYSTEM--(PRESSURE TEST AND BACTERIOLOGICAL TEST)
- E. SUBGRADE -- SUBMIT AND HAVE APPROVED DENSITIES PRIOR TO PLACEMENT OF ROCK.
- F. LIME ROCK BASE -- SUBMIT AND HAVE APPROVED DENSITIES AND AS-BUILTS PRIOR TO THE PLACEMENT OF ANY ASPHALT. (FLAT BOARDING ALSO REQUIRED.)
- G. ASPHALT PAVEMENT
- H. FINAL WALK--THROUGH INSPECTION -- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO CONTACT ALL APPLICABLE REGULATORY AGENCIES FOR INSPECTION REQUIREMENTS.
- I. CONCRETE FORMWORK AND ADA SLOPE VERIFICATIONS.
3. THE CONTRACTOR SHALL NOTIFY THE ENGINEER OF RECORD AT LEAST 2 BUSINESS DAYS IN ADVANCE OF THE FOLLOWING EVENTS:
- A. PRIOR TO PLACING BALLAST ROCK WITHIN EXFILTRATION TRENCH AND PIPE RUNS TO MEASURE DEPTH AND WIDTH, AS WELL AS DIRECTIONS RESPECTIVELY.
- B. PRIOR TO BACKFILLING WATER MAINS AND SERVICES
- C. PRIOR TO BACKFILLING SANITARY SEWER MAINS AND SERVICES
- D. AFTER COMPACTION OF LIMEROCK BASE AND PRIOR TO PLACEMENT OF FIRST LIFT OF ASPHALT
- E. AFTER 2ND LIFT AND CONCRETE PLACEMENT OF PEDESTRIAN PATHWAYS
- F. INSTALLING CONNECTIONS TO EXISTING WATER AND SEWER MAINS/SERVICES AFTER SECOND LIFT AND CONCRETE PLACEMENT OF PEDESTRIAN PATHWAYS.
- G. AT SUBSTANTIAL COMPLETION
- H. FINAL INSPECTION
4. UNLESS AUTHORIZED BY THE ENGINEER OF RECORD, THE CONTRACTOR SHALL NOT PROCEED WITH THESE ACTIVITIES, UNLESS THE ENGINEER OR A DESIGNATED REPRESENTATIVE IS PRESENT TO PERFORM AN INSPECTION.
5. SHOULD THE CONTRACTOR FAIL TO GIVE THE ENGINEER OF RECORD ADVANCE NOTICE OF TESTING AND INSPECTIONS AS SPECIFIED ABOVE, THE ENGINEER SHALL RESERVE THE RIGHT TO REFUSE ISSUANCE OF ANY CERTIFICATIONS OF COMPLETION AND FINAL INSPECTIONS, AND RESERVES THE RIGHT TO RECOMMEND THAT ANY CONTRACT AMOUNTS STILL HELD IN RETAINAGE NOT BE RELEASED. CITY INSPECTOR REPORTS SHALL NOT BE ACCEPTED AS A SUBSTITUTE FOR THE ENGINEER'S PRESENCE AT THE TESTING AND INSPECTION INTERVALS SPECIFIED ABOVE.

IV. SHOP DRAWINGS

1. PRIOR TO CONSTRUCTION OR INSTALLATION, SHOP DRAWINGS SHALL BE SUBMITTED TO AND APPROVED BY THE ENGINEER OF RECORD FOR THE FOLLOWING APPLICABLE ITEMS:
- A. DRAINAGE STRUCTURES, INCLUDING CATCH BASINS, WELL BOXES, PUMPS, MANHOLES/INLET FRAMES/GRATES, BAFFLES, ETC.
- B. ALL DRAINAGE PIPES.
- C. TRENCH DRAINS.
- D. EXFILTRATION FILTER FABRIC
- E. ALL WATER AND SEWER SYSTEM COMPONENTS
- F. ASPHALT PAVEMENT MIX DESIGN
- G. LIMEROCK MATERIAL
- H. CONCRETE MIX FOR PAVEMENT
- I. MATERIAL SUBSTITUTION REQUESTS
- J. EROSION CONTROL MATERIALS
- K. FILL MATERIAL
2. ALL PRECAST STRUCTURAL DRAWINGS MUST BE SIGNED AND SEALED BY A STATE OF FLORIDA LICENSED ENGINEER OF RECORD STATING THAT THE STRUCTURE(S) MEETS THE H20 LOAD RATING REQUIREMENTS. STRUCTURAL SHOP DRAWINGS WILL BE REJECTED AND NOT REVIEWED IF NOT SEALED BY A FLORIDA LICENSED ENGINEER.
3. IN ADDITION, SOME CITIES, COUNTIES, STATE AND/OR NATIONAL REGULATORY AGENCIES REQUIRE THEIR OWN INDIVIDUAL REVIEW AND APPROVAL. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO OBTAIN ALL OTHER AGENCY SHOP DRAWING APPROVALS AS REQUIRED.

V. TEMPORARY FACILITIES

1. TEMPORARY FACILITIES
- A. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ARRANGE FOR OR SUPPLY TEMPORARY WATER SERVICE, SANITARY FACILITIES, AND ELECTRICITY, DURING CONSTRUCTION.
- B. THE CONTRACTOR SHALL MAINTAIN AT LEAST ONE ACCESS ENTRANCE TO COMMERCIAL PROPERTIES AT ALL TIMES, IF APPLICABLE.
- C. THE CONTRACTOR SHALL MAINTAIN A CLEAR PATH FOR ALL SURFACE WATER DRAINAGE STRUCTURES AND DITCHES DURING ALL PHASES OF CONSTRUCTION, IF APPLICABLE.
2. TRAFFIC REGULATION
- A. THE CONTRACTOR SHALL PROVIDE ALL WARNING SIGNALS, SIGNS, LIGHTS AND FLAG PERSONS AS NECESSARY FOR THE MAINTENANCE OF TRAFFIC WITHIN PUBLIC RIGHT-OF-WAYS IN ACCORDANCE WITH THE U.S. DEPARTMENT OF TRANSPORTATION MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (M.U.T.C.D.), FDOT AND CITY OF POMPAÑO BEACH.
- B. ALL OPEN TRENCHES AND HOLES ADJACENT TO ROADWAYS OR WALKWAYS SHALL BE PROPERLY MARKED AND BARRICADED TO ASSURE THE SAFETY OF BOTH VEHICULAR AND PEDESTRIAN TRAFFIC.
- C. NO TRENCHES OR HOLES NEAR WALKWAYS, IN ROADWAYS OR THEIR SHOULDERS ARE TO BE LEFT OPEN DURING NIGHTTIME HOURS WITHOUT THE EXPRESS PERMISSION OF THE CITY OF POMPAÑO BEACH PUBLIC WORKS DEPARTMENT, AND/OR THE FLORIDA DEPARTMENT OF TRANSPORTATION.
- D. ANY MOT PERFORMED WITHIN FDOT R/W MUST CONFORM TO FDOT STANDARD PLANS INDEX 102-600 SERIES.

VI. PROJECT CLOSE OUT

1. CLEANING UP
- A. DURING CONSTRUCTION, THE PROJECT SITE AND ALL ADJACENT AREAS SHALL BE MAINTAINED IN A NEAT AND CLEAN MANNER AND THE PAVED AREAS SHALL BE SWEEP BROOM CLEAN. UPON FINAL CLEANUP, THE PROJECT SITE SHALL BE LEFT CLEAR OF ALL SURPLUS MATERIAL OR TRASH, AND THE PAVED AREAS SHALL BE BROOMED AND PRESSURE CLEANED.
- B. THE CONTRACTOR SHALL RESTORE OR REPLACE, WHEN AND AS DIRECTED, ANY PUBLIC OR PRIVATE PROPERTY DAMAGED BY HIS/HER WORK, EQUIPMENT AND/OR EMPLOYEES TO A CONDITION AT LEAST EQUAL TO THAT EXISTING IMMEDIATELY PRIOR TO THE BEGINNING OF OPERATIONS.
- C. THE CONTRACTOR SHALL REPLACE ALL PAVING, STABILIZED EARTH, CURBS, DRIVEWAYS, SIDEWALKS, FENCES, MAILBOXES, SIGNS AND ANY OTHER IMPROVEMENTS REMOVED DURING CONSTRUCTION WITH THE SAME TYPE OF MATERIAL AND TO THE CONDITION WHICH EXISTED PRIOR TO THE BEGINNING OF OPERATIONS.
- D. WHERE MATERIAL OR DEBRIS HAVE WASHED OR FLOWED INTO, OR HAVE BEEN PLACED IN WATER COURSES, DITCHES, DRAINS, CATCH BASINS, OR ELSEWHERE AS A RESULT OF THE CONTRACTOR'S OPERATIONS, SUCH MATERIAL OR DEBRIS SHALL BE REMOVED AND SATISFACTORILY DISPOSED OF DURING THE PROGRESS OF THE WORK, AND THE AREA KEPT IN A CLEAN AND NEAT CONDITION.
- E. ALL DISPOSAL OF EXCESS AND UNSUITABLE EXCAVATED MATERIAL, DEMOLITION, VEGETATION, RUBBISH AND DEBRIS SHALL BE MADE OUTSIDE THE LIMITS OF CONSTRUCTION AT A LEGAL DISPOSAL SITE PROVIDED BY THE CONTRACTOR AT HIS/HER OWN EXPENSE, WITH THE PRIOR APPROVAL OF THE ENVIRONMENTAL ENGINEER. MATERIAL CLEARED FROM THE SITE SHALL NOT BE DEPOSITED ON ADJACENT AND/OR NEARBY PROPERTY.
2. ALL PROPERTY MONUMENTS OR PERMANENT REFERENCES, REMOVED OR DESTROYED BY THE CONTRACTOR DURING CONSTRUCTION SHALL BE RESTORED BY A STATE OF FLORIDA REGISTERED LAND SURVEYOR AT THE CONTRACTOR'S EXPENSE.
3. PROJECT RECORD DOCUMENTS
- A. DURING THE DAILY PROGRESS OF THE JOB, THE CONTRACTOR SHALL RECORD ON HIS SET OF CONSTRUCTION DRAWINGS THE EXACT LOCATION, LENGTH AND ELEVATION OF ANY FACILITY NOT BUILT EXACTLY ACCORDING TO PLANS.
- B. THE CONTRACTOR SHALL PROVIDE THE ENGINEER WITH AS-BUILT GRADES AND LOCATIONS OF FINISHED PAVEMENT, SIDEWALKS, CURBS, AND ALL PHYSICAL IMPROVEMENTS. SUCH GRADES SHALL BE OBTAINED BY A LICENSED SURVEYOR REGISTERED TO PRACTICE IN THE STATE OF FLORIDA, AND SHALL DOCUMENT THE INTENT OF THE PROPOSED GRADES SHOWN ON THE PLANS. THIS SHALL BE DONE AT NO COST TO THE OWNER.
4. CONTRACTOR TO REPLACE ALL FOUND PIPES WITH NAIL AND DISKS.

VII. STORM DRAINAGE

1. GENERAL
- A. CATCH BASIN GRATES AND MANHOLE RIM ELEVATIONS AS SHOWN ON PLANS SHALL BE ADJUSTED TO CONFORM TO NEW OR EXISTING GRADES, AS REQUIRED.
- B. ALL ONSITE STORM DRAINAGE MATERIALS AND INSTALLATION SHALL CONFORM TO THE APPLICABLE CITY OF CAPE CORAL AND FDOT SPECIFICATIONS.
2. ALL EXFILTRATION TRENCH SHALL BE AS PER FDOT STANDARD DETAIL, AND INSTALLED AT THE WIDTH, DEPTH AND ELEVATION SHOWN ON THE APPROVED CROSS SECTION DEPICTED IN THE DETAILS SHEET. ANY CONFLICT WITH EXISTING OR PROPOSED UTILITIES SHALL IMMEDIATELY BE BROUGHT TO THE ATTENTION OF THE ENGINEER, ANY IMPERMEABLE MATERIAL ENCOUNTERED IN THE EXCAVATION FOR THE EXFILTRATION TRENCH SHALL BE REMOVED AS DIRECTED BY THE ENGINEER.
3. ALL DRAINAGE CATCH BASINS AND STRUCTURES SHALL BE PRECAST CONCRETE AS MANUFACTURED BY U.S. PRECAST CORPORATION OR APPROVED EQUAL.
4. ALL DRAINAGE CATCH BASIN FRAMES AND GRATES, AND STORM DRAINAGE MANHOLE RIMS SHALL BE AS MANUFACTURED BY U.S. FOUNDRY OR APPROVED EQUAL.
5. THE TRENCH FILTER FABRIC SHALL BE WOVEN FILTER FABRIC MIRAFI 404 (OR APPROVED EQUIVALENT) AND APPROVED BY THE CITY OF POMPAÑO BEACH. IT SHALL BE USED TO WRAP ALL SIDES, BOTTOM AND TOP OF THE EXFILTRATION TRENCH. THE TOP SECTION OF THE MATERIAL SHALL BE LAPPED A MINIMUM OF 12 INCHES AND THE CONTRACTOR SHALL TAKE EXTREME CARE IN BACKFILLING TO AVOID BUNCHING OF THE FABRIC.
6. SOLID AND PERFORATED STORM DRAINAGE PIPE SHALL BE HP-PP SELECTED FROM THE MANUFACTURES AND TYPES APPROVED BY THE CITY OF POMPAÑO BEACH. PERFORATED PIPE SHALL TERMINATE 4'-0" FROM THE DRAINAGE STRUCTURE. THE REMAINING 4'-0" SHALL BE NON-PERFORATED PIPE.
7. PROVIDE A MINIMUM PROTECTIVE COVER OF 24 INCHES OVER STORM SEWER AND AVOID UNNECESSARY CROSSING BY HEAVY CONSTRUCTION VEHICLES DURING CONSTRUCTION.
8. THE CONTRACTOR SHALL PROTECT COMPLETED DRAINAGE STRUCTURES AND EXFILTRATION TRENCH SYSTEMS FROM CONTAMINATION OF SILT AND CONSTRUCTION DEBRIS. PLACE PLYWOOD ON, OR FILTER FABRIC BETWEEN, THE FRAME AND INLET GRATE UNTIL CONSTRUCTION OPERATIONS ARE FINISHED.

VIII. PAVING


1. GENERAL
- A. ALL UNDERGROUND UTILITIES SHALL BE COMPLETED PRIOR TO CONSTRUCTION OF LIMEROCK BASE.
- B. ALL EXISTING PAVEMENT, CUT OR DAMAGED BY CONSTRUCTION SHALL BE PROPERLY RESTORED AT THE CONTRACTOR'S EXPENSE.
- C. WHERE ANY PROPOSED PAVEMENT IS TO BE CONNECTED TO EXISTING PAVEMENT, THE EXISTING EDGE OF PAVEMENT SHALL BE SAW CUT.
- D. PROPOSED ASPHALT PAVEMENT SHALL BE CONNECTED TO EXISTING AS PER CITY OF POMPAÑO BEACH & FDOT STANDARD DETAILS. CONTRACTOR SHALL MATCH EXISTING ELEVATIONS ON NEW SIDEWALK OR NEW PAVEMENT.
- E. CONTRACTOR SHALL REMOVE AND DISPOSE OF THE EXISTING CONC. CURB, CURB & GUTTER, SIDEWALK AND ASPHALT WHERE NEW SIDEWALK, CURB & GUTTER AND MEDIAN IS PROPOSED TO BE CONSTRUCTED.
- F. NONE OF THE EXISTING LIMEROCK BASE THAT IS REMOVED IS TO BE INCORPORATED INTO THE PROPOSED LIMEROCK BASE.
2. MATERIALS AND INSTALLATION
- A. ALL ON SITE WORK AND MATERIALS SHALL BE IN ACCORDANCE WITH DIVISION 2 OF THE FDOT SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION (LATEST EDITION) INCLUDING, BUT NOT LIMITED TO THE FOLLOWING:
- | SECTION | TITLE |
|---------|----------------------------------|
| 120 | EXCAVATION AND EMBANKMENT |
| 160 | STABILIZATION |
| 210 | LIMEROCK BASE |
| 300 | PRIME AND TACK COATS |
| 522 | CONCRETE SIDEWALK SPECIFICATIONS |
- B. SUBGRADE FOR DRIVEWAYS AND PARKING AREAS SHALL BE COMPACTED TO A MINIMUM OF 95% OF THE MAXIMUM DENSITY PER AASHTO SPECIFICATION T-180-74. THE MINIMUM COMPACTED THICKNESS OF THE STABILIZED SUBGRADE SHALL BE 12".
- C. THE MINIMUM COMPACTED THICKNESS OF THE LIMEROCK BASE SHALL BE 8" AND PLACED IN TWO EQUAL LIFTS. LIMEROCK BASE SHALL BE PRIMED AND COMPACTED TO 98% PER A.A.S.H.T.O. T-180-74.
3. TESTING
- A. DENSITY TESTS SHALL BE TAKEN BY AN INDEPENDENT TESTING LABORATORY, CERTIFIED BY THE STATE OF FLORIDA, WHERE DIRECTED BY THE CITY OF CAPE CORAL INSPECTOR OR THE GEOTECHNICAL ENGINEER.

IX. PAVEMENT MARKINGS AND TRAFFIC SIGNS

1. PAVEMENT MARKINGS
- A. INSTALLATION: ALL PAVEMENT MARKINGS SHALL BE MADE IN ACCORDANCE WITH FDOT STANDARD INDEX 711-001, WHERE SHOWN ON THE PLANS.
- B. MATERIALS:
1. WHERE THE PLANS CALL FOR PAINTED PAVEMENT MARKINGS (P), INSTALLATION AND MATERIALS SHALL MEET ALL REQUIREMENTS OF SECTION 710 OF FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND THE FOLLOWING, CONTRACTOR TO APPLY TWO COATS OF VOC COMPLIANT, LOCAL DOT APPROVED, UNDLIUTED, SOLVENT BASED OR LATEX TRAFFIC PAINT. CONTRACTOR TO FOLLOW MANUFACTURER'S RECOMMENDED APPLICATION RATE, WITHOUT ADDITION OF A THINNER, WITH A MAXIMUM OF 100 SQUARE FEET PER GALLON OR AS REQUIRED PROVIDING MINIMUM 15 MILS WET FILM THICKNESS AND 7½ MILS DRY FILM THICKNESS PER COAT WITH MINIMUM OF 30 DAYS BETWEEN APPLICATIONS. SECOND COAT OF PAINT SHALL NOT BE APPLIED EARLIER THAN 7 DAYS PRIOR TO GRAND OPENING. PAINT SHALL BE CRISP, STRAIGHT AND APPLIED UNIFORMLY ACROSS THE WIDTH OF THE LINE FOR A TOTAL DRY FILM THICKNESS OF 15 MILS
2. ALL PAVEMENT SYMBOLS AND MARKINGS TO BE THERMOPLASTIC WITH THE EXCEPTION OF PARKING STRIPING. WHERE THE PLANS CALL FOR THERMOPLASTIC PAVEMENT MARKINGS, INSTALLATION AND MATERIALS SHALL MEET ALL REQUIREMENTS OF SECTION 711 OF FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
- C. PROTECTION:
1. THE CONTRACTOR SHALL NOT ALLOW TRAFFIC ONTO NEWLY APPLIED PAVEMENT STRIPING/MARKINGS UNTIL THEY ARE SUFFICIENTLY DRY TO PERMIT VEHICLES TO CROSS THEM WITHOUT DAMAGE. THE CONTRACTOR SHALL, AT HIS OWN EXPENSE, REMOVE AND REPLACE ANY PORTION OF THE PAVEMENT STRIPING/MARKINGS DAMAGED BY PASSING TRAFFIC OR FROM ANY OTHER CAUSE.
2. TRAFFIC SIGNS
- A. INSTALLATION: TRAFFIC SIGNS SHALL BE INSTALLED IN ACCORDANCE WITH THE M.U.T.C.D. (LATEST EDITION) IN LOCATIONS SHOWN ON PLANS.
- B. MATERIALS: FOLLOW SECTION NO. 700, HIGHWAY SIGNING, OF THE FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, AND M.U.T.C.D.

X. STANDARD DETAILS

1. ALL CONSTRUCTION OF THE PROPOSED PAVING, GRADING AND DRAINAGE SYSTEM SHALL BE IN STRICT ACCORDANCE WITH THE CITY OF CAPE CORAL PUBLIC WORKS SPECIFICATIONS AND STANDARD DETAILS.

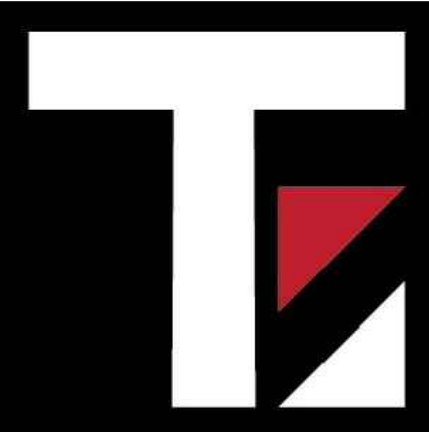

Thompson Engineering
& Consulting, Inc.

19304 NW 12th Street
Pembroke Pines, FL 33029

thompson-ec.com
Florida Registry No. 36369
(954) 232-2261

Date: 10/29/2025

This item has been digitally
signed and sealed by Justin
Thompson, PE, on the date
adjacent to the seal.

Printed copies of this document
are not considered signed and
sealed and the signature must be
verified on any electronic copies.

DRC SUBMITAL
RISING TIDE
CAR WASH

2901 W. ATLANTIC BOULEVARD
POMPAÑO BEACH, FL 33069

CITY OF POMPAÑO BEACH BROWARD COUNTY

Project No.	25-032
Date	10/29/2025
Scale	As Shown
Drawn By	UCS
Checked By	JT

Revisions		
No.	Description	Date

GENERAL NOTES

Sheet Number:

C102

Sheet 2 of 19

DRC
28. IF IT SHOULD BECOME NECESSARY TO STOP WORK FOR INDEFINITE PERIODS, THE CONTRACTOR SHALL TAKE EVERY PRECAUTION TO PREVENT DAMAGE OR DETERIORATION OF THE WORK WHEN STOPPED.
PZ25-12000026
12/03/2025