

The diagram illustrates a cross-section of a concrete curb. The curb has a top width of 6 inches and a base width of 8 inches. The height of the curb is 18 inches. A 2-inch radius is specified at the top outer corner. The curb is made of concrete with a minimum strength of 3,000 PSI. The curb is shown adjacent to a sloped area labeled 'SLOPE PER GRADING PLAN'. The curb is supported by a base layer labeled 'BASE'. A joint is shown in the curb, labeled '1/2" EXP. JOINT AND PREFORMED JOINT FILLER (FOR CONCRETE PAVEMENT ONLY)'. The top surface of the curb is labeled 'PAVEMENT SURFACE'.

Labels in the diagram include:

- SLOPE PER GRADING PLAN
- 6"
- 2" R
- PAVEMENT SURFACE
- 18"
- MIN 3,000 PSI CONCRETE
- BASE
- 8"
- 1/2" EXP. JOINT AND PREFORMED JOINT FILLER (FOR CONCRETE PAVEMENT ONLY)

**NOTE:**  
 1. PROVIDE 1/8" - 1/4" CONTRACTION JOINTS AT 10 FEET ON-CENTER



### ACCESSIBLE PARKING SIGN

FTP-20-06		
2" RADII 3/8" BORDER		
1" SERIES C LEGEND		
COLOR	TOP	BOTTOM
BACKGROUND	BLUE	WHITE
LEGEND AND BORDER	WHITE	BLACK
1" RADII 3/8" BORDER		
1" SERIES C LEGEND		
COLOR		
BACKGROUND	WHITE	
LEGEND AND BORDER	BLACK	

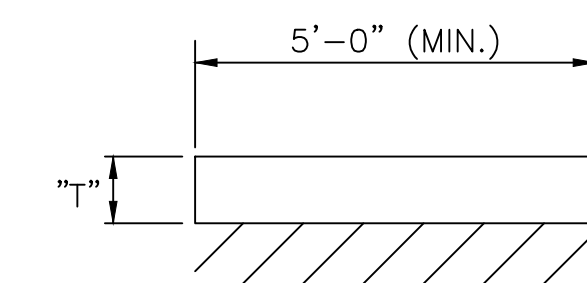


TABLE OF SIDEWALK JOINTS	
TYPE	LOCATION
"A"	P.C. P.T. OF CURVES & WHERE SIDEWALK ABUT CONCRETE DRIVEWAY.
"B"	5'-0" CENTER TO CENTER ON SIDEWALKS
"C"	WHERE SIDEWALK ABUT CONCRETE CURBS, DRIVEWAYS, AND SIMILAR STRUCTURES.



ENGINEERING STANDARDS 2025			
REVISONS		ENGINEERING DIVISION CITY OF POMPANO BEACH	ACCESSIBLE SPACE SIGN
BY	DATE		
SCALE: N.T.S.		DATE: MAY 2022 DWG. NO.	300-5