


D:\oneDrive - FANJUL & ASSOCIATES, LLC\2023\00-ECW-2023\0701-ECW-3685-NFHwy-BASE-V2.dwg, 10/15/2023 10:15:12 AM, DWG To PDF.pc3

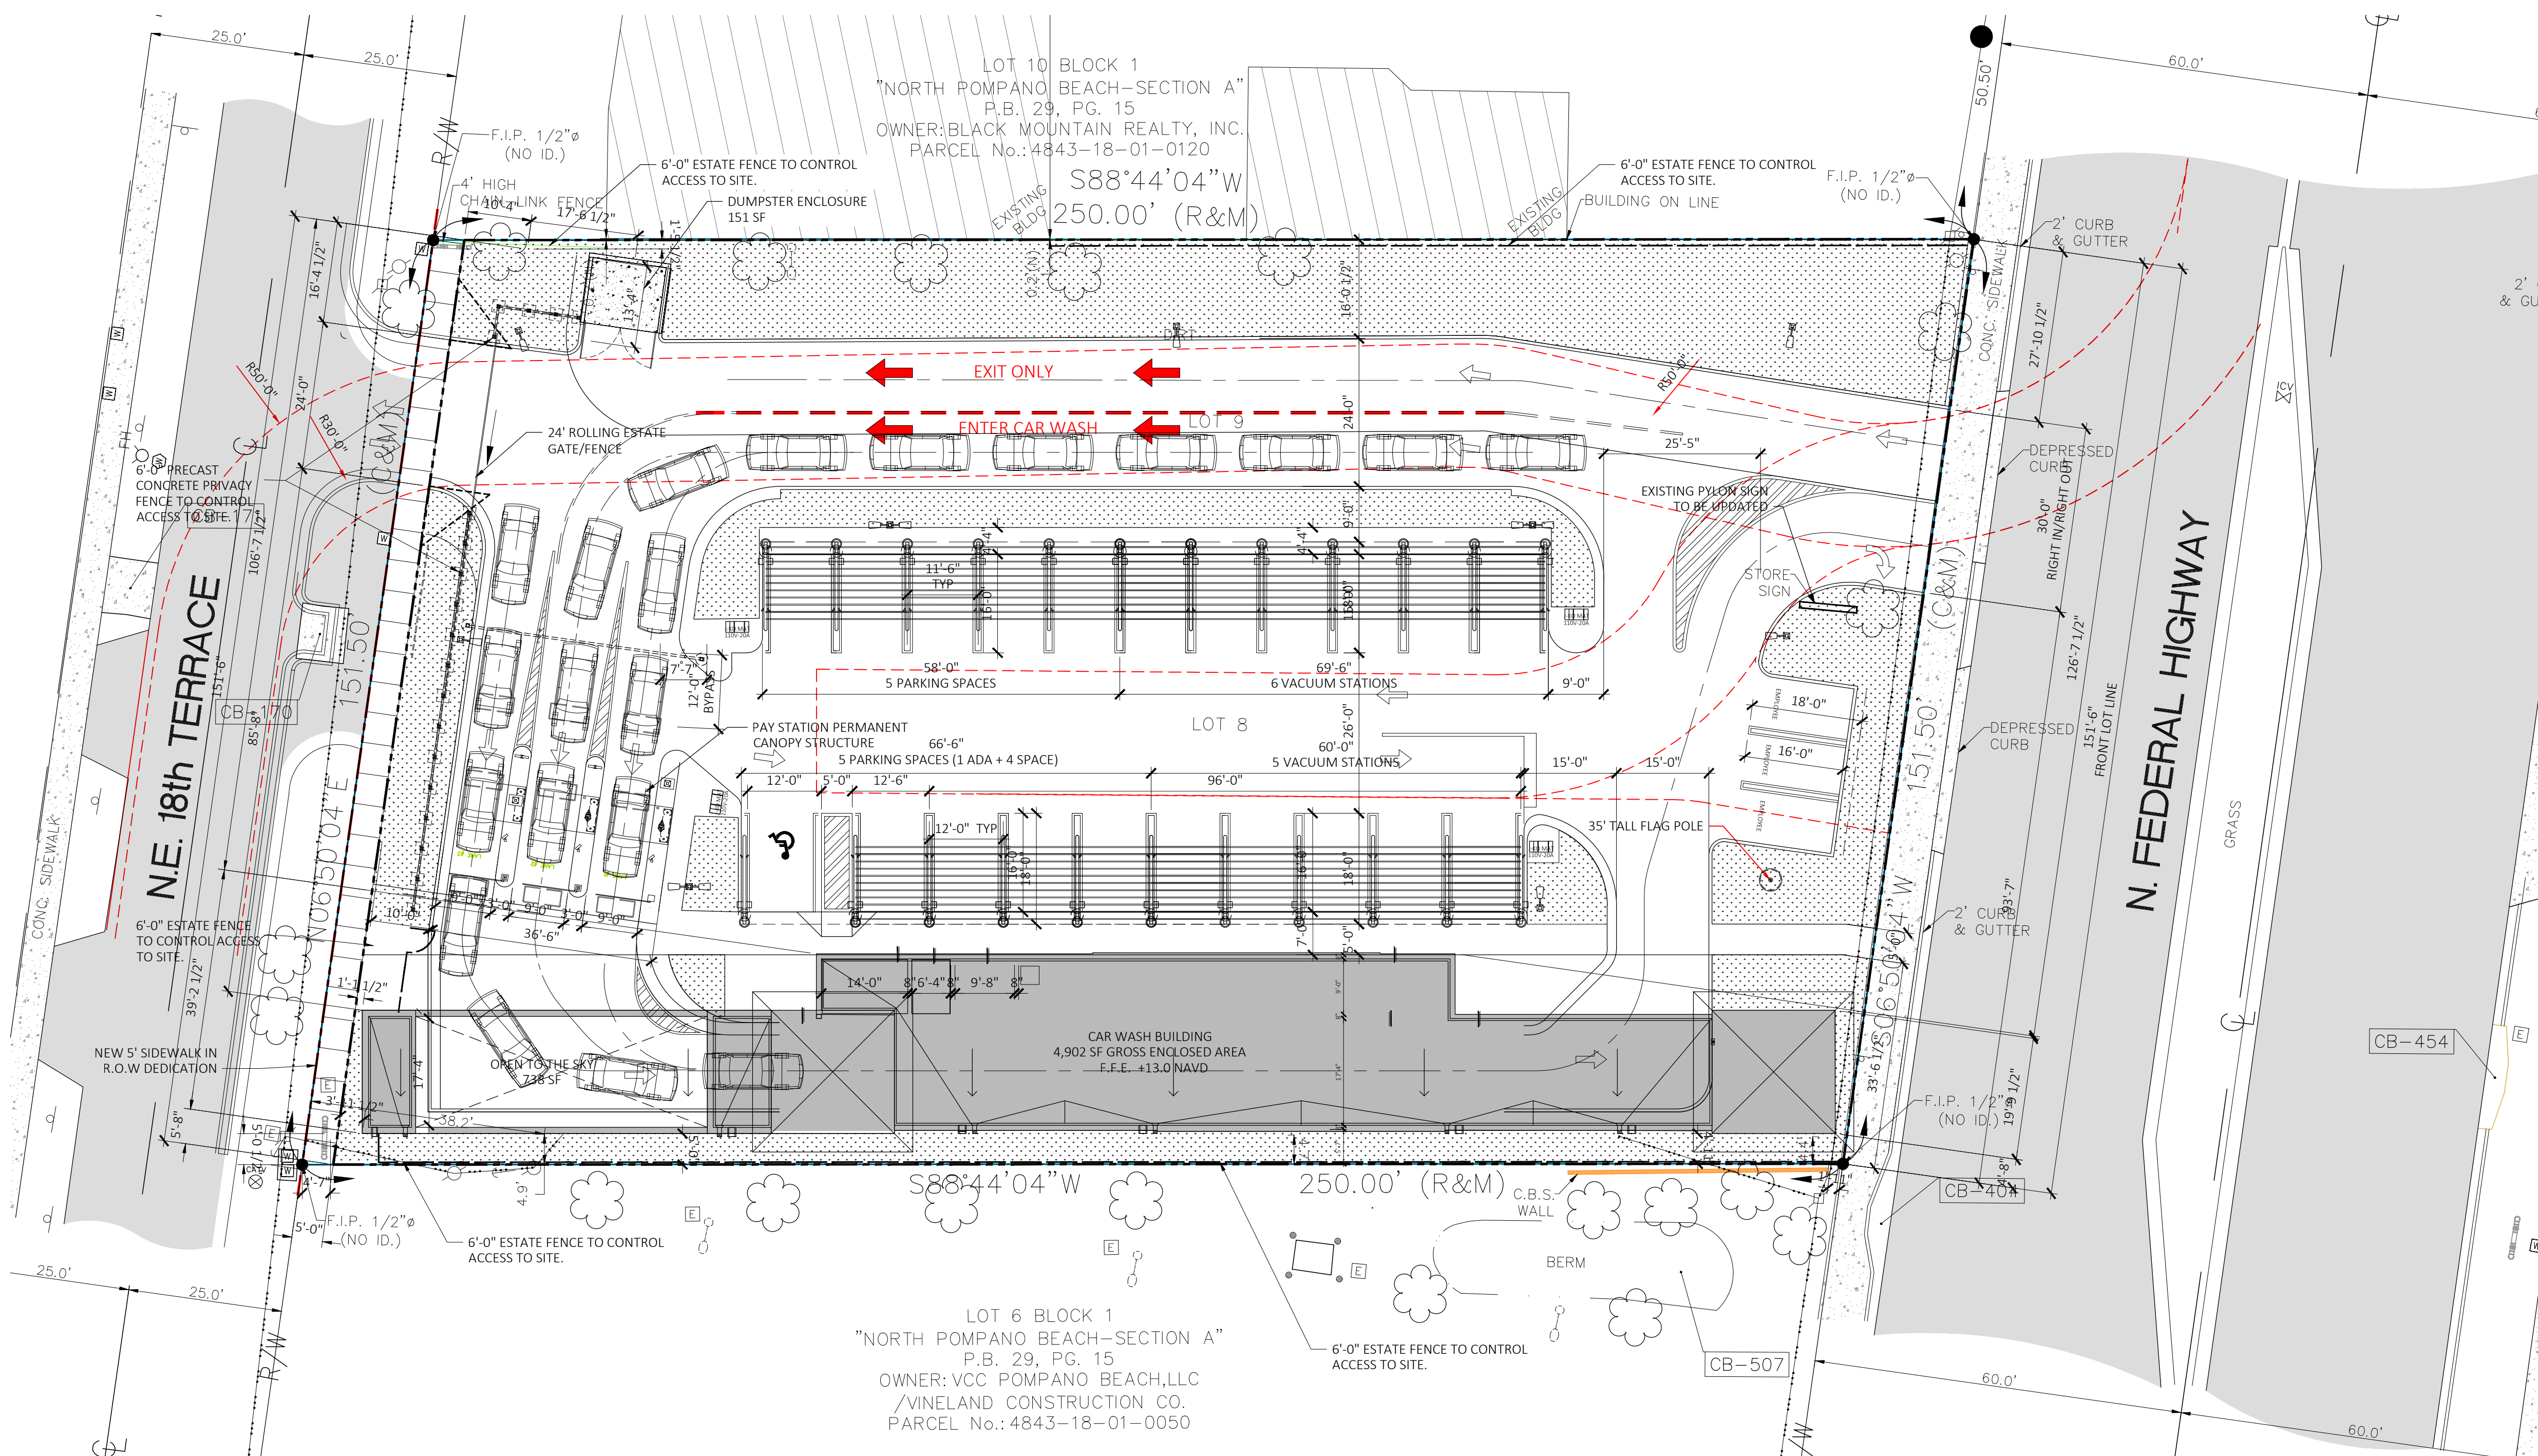

PROPERTY DETAILS
 Address: 3685 N FEDERAL HWY, POMPANO BEACH FL 33064
 Owner(s): KAIA PROPERTIES INC
 Folio: NORTH POMPANO BEACH SEC A 29-15 B LOTS 7,8,9, BLK 1
 Parcel ID: 4843 18 01 0100

PLANNING & COMMUNITY DEVELOPMENT

Zoning Designation	B-3
Zoning Description	B-3 GENERAL COMMERCIAL
Designating Agency	POMPANO BEACH
Future Land-Use Designation	COMMERCIAL
LOT Size (Current)	37497 SF 0.861 Acres
Less ROW Dedication - Federal	-139 SF 11" -0.003 Acres
Less ROW Dedication 18th Terrace	-758 SF 5'-0" -0.017 Acres
LOT Size (Proposed)	36600 SF 0.840 Acres
Proposed Use:	Sec 155-4219 (H) Automatic dragline car wash with self service vacuums

B-3 DIMENSIONAL REQUIREMENTS

REQUIREMENT	REQUIRED	EXISTING	PROPOSED
MAX BUILDING HEIGHT	105'	35'	35'
MIN LOT SIZE	10,000	37497	36600
MIN LOT WIDTH	100'	150'	151'-6"
MAX LOT COVERAGE	60%	4902	13%
MIN PERVIOUS AREA	20%	8627	24%
BUILDING SETBACKS			
MINIMUM FRONT SETBACK (FT)	0'	N. Federal	1'-11" (E)
MINIMUM SIDE YARD (FT)	0'		(N)115' (S)5'
MINIMUM FRONT SETBACK (FT)	0'	18th Terrace	1'-1" (W)

PARKING DIMENSIONS TABLE

STANDARD	CODE SECTION	REQUIRED	PROPOSED
PARKING DIMENSIONS	9'-0" X 18'		12'X18'
MIN. DRIVE AISLE WITH 90 DEGREE		24'	26'
2 WAY DRIVE AISLE WIDTH		24'	MIN 24'
1 WAY DRIVE AISLE WIDTH		12'	MIN 12'

VEHICULAR PARKING REQUIREMENT

REQUIRED SPACES	AREA (SF)	RATIO	TOTAL REQUIRED
USE			
CARWASH, FULL SERVE AUTOMATIC	4790	1/500 SF	10
PROVIDED SPACES			
PARKING SPACES	9	ADA	10
VACUUM STATIONS			11

AUTO WASH STACKING REQUIREMENTS

USE	REQ. INBOUND	REQUIRED	PROVIDED
TICKET GATE (AUTO PAY KIOSK)	2 SPACES/EA	6	30 Car Capacity

GENERAL ZONING USE:
 155-4219 (H) Car Wash or Auto Detailing

2. Definition
 A car wash or auto detailing use is an establishment providing the washing of the exterior of vehicles where vehicles are manually driven or pulled by a conveyor through a system of rollers and/or brushes. Interior cleaning and/or drying may be conducted manually by vehicle operator or on-site attendants. Interior cleaning and/or drying may be conducted manually by the vehicle operator or on-site attendants.
3. Standards
 A car wash or auto detailing use shall comply with the following standards:
 a. The use shall be designed to ensure proper functioning of the site as related to vehicle stacking, circulation, and turning movements.
 b. No overhead doors shall face the front lot line.
 c. Each lane shall be covered with a permanent canopy which shall have a maximum clearance height of 14 feet above grade, except where state or federal law requires a higher clearance.

MISCELLANEOUS SITE EQUIPMENT

ITEM	QTY
MAT BRUSHER & PAD - J-KO MODEL BB-X	4
MAT SINK	1
FLAG POLE - MODEL ECH-35	1
VACUUM ARCHES WITH AIR	23
OTT STANDS	2
XPT POINTS OF SALE	2
WAIT / GO SIGN & POST	1

FANJUL & ASSOCIATES, LLC
 ARCHITECTURE, PLANNING & INTERIOR DESIGN
 AA26000725
ARTURO G. FANJUL, RA
 PRESIDENT
 5455 SW 8TH STREET, SUITE 240
 CORAL GABLES, FLORIDA 33134
 PH. 305 726.8313
 FAX 305 356.3686
 arturo@fanjularchitects.com
 "A BETTER LIFE THROUGH DESIGN"

STATE OF FLORIDA
 ARTURO G. FANJUL
 REGISTERED ARCHITECT
 AR0017585







This item has been electronically signed and sealed by:
 Printed copies of electronically signed, dated, and sealed documents are not considered signed and sealed and the digital authentication code must be verified on any electronic copies.

NATIONAL EXPRESS WASH LLC
EL CAR WASH
 POMPANO BEACH
 3685 N. FEDERAL HWY
 POMPANO BEACH, FL

CONCEPTUAL SITE PLAN

1 A001 SCALE: 1"=20'-0"

- ENCLOSURE KEY NOTES:**
- CAST IN PLACE CONCRETE CAP WITH 2 #5 CONT. TOP & BOTTOM
 - CMU WALL WITH #5 BAR IN GROUT FILLED CELLS @ 32" O.C. AND ALL CORNERS.
 - PROVIDE 9 GA WIRE TYPE REINFORCING AT EVERY OTHER BLOCK COURSE.
 - 5/8" 3 COAT SMOOTH STUCCO FINISH. WITH TOOLED 1/4" VERTICAL REVEAL. PROVIDE PLASTIC J BEAD AT TRANSITION TO STUCCO BASE.
 - PROVIDE 1/2" EXPANSION JOINT FILLER.
 - 6" THICK SLOPPED CONCRETE 3000 PSI NORMAL WEIGHT CONCRETE SLAB ON GRADE WITH W6X6X10 WMM.
 - PROVIDE 5 MIL VAPOR BARRIER.
 - HEAVY DUTY HINGES.
 - PROVIDE 1X3 TUBE STEEL FRAME.
 - PROVIDE 1X3 TUBE STEEL FRAME.
 - 3/4" X 6" HORIZONTAL TUBE SLATS @ 6.5" O.C. PAINTED TO CREATE OPAQUE GATE.
 - STEEL PLATE WITH (2) 1" Ø HOLES FOR DROP PINS. DRILL ASPHALT 2" DEEP MIN.
 - PROVIDE HEAVY DUTY 3/4" ALUMINUM STOP PIN (CAIN BOLT) CLOSING DEVICE.
 - FOOTING SEE SCHEDULE.
 - PROVIDE 1-1/4" SMOOTH STUCCO 24" HIGH BASE WITH ACCENT COLOR. TERMINATE 6" BELOW GRADE.

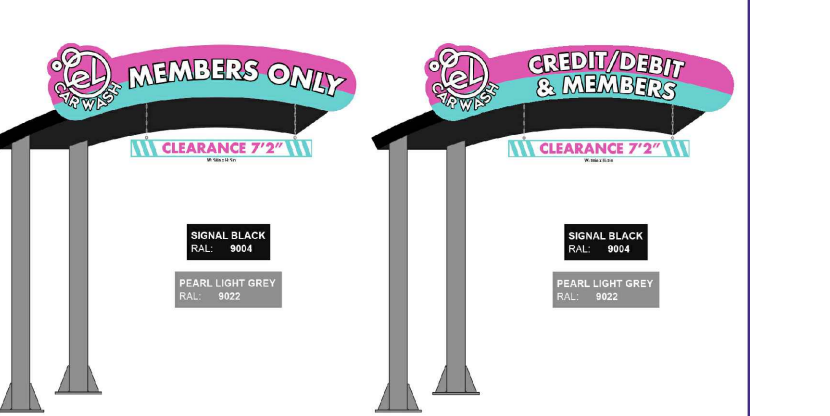

CONCEPTUAL SITE PLAN

REVISION	NO.

PREAPP-COMMENTS

DATE	8/18/2023
SCALE:	AS NOTED
DRAWN:	AGF
CHECKED:	AGF
JOB NO.	230701
PERMIT NO.	

OWNERSHIP
 OF THESE DOCUMENTS & SPECIFICATIONS AS INSTRUMENTS OF SERVICE ARE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT WHETHER THE PROJECT THEY ARE MADE FOR IS EXECUTED OR NOT. THEY SHALL NOT BE USED BY OWNER OR OTHERS ON OTHER PROJECTS OR FOR ADDITIONS TO THIS PROJECT BY OTHERS, EXCEPT BY AGREEMENT IN WRITING AND WITH APPROPRIATE COMPENSATION TO THE ARCHITECT.

SP-1