COPYRIGHT 2021 GALLO HERBERT ARCHITECTS

"IT IS A VIOLATION OF THE LAW FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF A LICENSED ARCHITECT TO ALTER THESE PLANS AND SPECIFICATIONS." THIS DOCUMENT CONTAINS PROPERTY INFORMATION AND SHALL NOT BE USED OR REPRODUCED, OR ITS CONTENTS DISCLOSED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF GALLO HERBERT ARCHITECTS
CONTRACTOR(S) SHALL VERIFY EXISTING CONDITIONS AND CORRELATE DIMENSIONS PRIOR TO PROVIDING THE WORK DETAILED IN THESE DRAWINGS, AND SHALL PROMPTLY NOTIFY THE DESIGNER OF ANY DISCREPANCIES.

NFPA LIFE SAFETY DATA

FLORIDA FIRE PREVENTION CODE, SEVENTH EDITION INCLUDING NFPA, 1 FIRE CODE AND NFPA 101, LIFE SAFTEY CODE, 2018 EDITION

NEW AIRCRAFT HANGAR STORAGE OCCUPANCY CHAPTER 42 ORDINARY HAZARD BUILDING IS NOT FULLY SPRINKLERED

NFPA 42.6 SPECIAL PROVISIONS FOR AIRCRAFT HANGARS

2 MEANS OF EGRESS REQUIRED FROM ALL AIRCRAFT HNAGAR AREAS.

EXITS FROM AIRCRAFT STORAGE AREASSHALL BE AT INTERVALS NOT EXCEEDING 150 FT.

HORIZAONTAL EXITS AT FIRE BARRIERS SHALL NOT EXCEED 100 FT. SPACING.

"SMASH DOORS" NOT APPLICABLE

MEZZANINES NOT APPLICABLE.

DEAD ENDS SHALL NOT EXCEED 50 FT. FOR NON HIGH HAZARD AREAS.

MAXMUM COMMON PATH OF TRAVEL– ORDINARY HAZARD, UN–SPRINKLERED = 50 FT

DEAD END 50 FT. MAX.

MAXIMUM TRAVEL DISTANCE TO EXITS ORDINARY HAZARD, UNSPRINKLERED=200 FT MAX

UNPROTECTED VERTICAL OPENINGS NOT APPLICABLE

INTERIOR WALL AND CEILING FINISHES–PER REQUIREMENTS

DETECTION ALARM & COMMUNICATION NOT REQUIRED

NFPA 409 STANDARD ON AIRCRAFT HANGERS

GROUP III HANGAR TYPE III(200) CONSTRUCTION TYPE PER NFPA 220

HANGAR DOORS LESS THAN 28 FT. HIGH

MAXIMUM FIRE AREA LESS THAN 12,000 S.F.

BUILDING UNSPRINKLERED AS ALLOWED AS ORDINARY HAZARD PER FBC 412.4.6.1

FLORIDA BUILDING CODE DATA

FLORIDA BUILDING CODE 2020– SEVENTH EDITION

USE AND OCCUPANCY S–1 AIRCRAFT STORAGE HANGAR
CHAPTER 3

SPECIAL DETAILED REQUIREMENTS BASED ON USE & OCCUPANCY
CHAPTER 4– 412– AIRCRAFT RELATED SPECIAL REQUIREMENTS

[F] 412.4.6.1 HAZARDOUS OPERATIONS. GROUP III

AIRCRAFT HANGAR ACCORDING TO TABLE 412.4.6 THAT CONTAINS HAZARDOUS OPERATIONS INCLUDING, BUT NOT LIMITED TO, THE FOLLOWING SHALL BE PROVIDED WITH A GROUP I OR II FIRE SUPPRESSION SYSTEM IN ACCORDANCE WITH NFPA 409 AS APPLICABLE.

1. DOPING.
2. HOT WORK INCLUDING, BUT NOT LIMITED TO, WELDING, TORCH CUTTING AND TORCH SOLDERING
3. FUEL TRANSFER.
4. FUEL TANK REPAIR OR MAINTENANCE NOT INCLUDING DEFUELED TANKS IN ACCORDANCE WITH NFPA 409, INERTED TANKS OR TANKS THAT HAVE NEVER BEEN FUELED.
5. SPRAY FINISHING OPERATIONS.
6. TOTALRUEL CAPACITY OF ALL AIRCRAFT WITHIN THE UNSPRINKLERED SINGLE AREA IN EXCESS OF 1,600 GALLONS (6057 L).
7. TOTAL FUEL CAPACITY OF ALL AIRCRAFT WITHIN THE MAXIMUM SINGLE FIRE AREA IN EXCESS OF 7,500 GALLONS (28 390 L) FOR A HANGAR WITH AN AUTOMATIC SPRINKLER SYSTEM IN ACCORDANCE WITH SECTION 903.3.1.1.

GENERAL BUILDING HEIGHTS AND AREAS
CHAPTER 5– ALLOWABLE HEIGHT TYPE IIIB N.S. 55 FT.

STORIES ABOVE GRADE PLANE S–1, N.S. = 3 MAX

BUILDING AREA, S–1, N.S. = 17,500

AREA MOD. FOR BUILDING A
FRONTAGE ALLOWED I front= f/p–0.25 X W/30= .75
THEREFORE 17,500X1.75= 30,625 S.F.

TYPE CONSTRUCTION: IIIB

CH 6 FIRE RATED EXTERIOR WALLS S–1 OCC , X IS GREATER THAN

OR EQUAL TO 30 FT ALLOW ZERO HOUR RATED EXT WALLS.

EMERGENCY RADIO SIGNAL / BI–DIRECTIONAL AMPLIFICATION

ALL BUILDINGS SHALL BE TESTED FOR EMERGENY RADIO SIGNAL STREGTH
AFTER THE SHELL IS CONSTRUCTED. VERIFY WITH MUNICIPALITY FIRE DEPARTMENT FOR TESTING REQUIREMENTS PRIOR TO TESTING. IF THE BUILDING IS FOUND TO REQUIRE A B.D.A. (BI–DIRECTIONAL AMPLIFICATION SYSTEM) OWNER WILL ENGAGE A SPECIALTY ENGINEER TO DESIGN A BOOSTER SYTEM IN FULL ACCORDANCE WITH NFPA 72 AND LOCAL AUTHORITIES HAVING JURISDICTION.

DETAILS OF CONSTRUCTION SUCH AS LOCATION OF HEAD END EQUIPMENT AND CABLE
PATHWAYS VERTICALLY AND HORIZONTALLY SHALL BE SPECIFIED.

THE CONSTRUCTION DRAWINGS WILL INCLUDE PLANNING FOR POSSIBLE BDA EQUIPMENT LOCATION AND CONDUITS. BDA WILL BE IN A TWO HOUR FIRE RATED ROOM NOT LESS
THAN 3'WIDE BY 5' LONG. VERTICAL CABLE CHASES IF NECESSARY WILL NEED TO PROVIDE 2 HOUR FIRE RATING. HORIZONTAL CABLE NEED NOT BE FIRE RATED. CABLE AND EQUIPMENT SHALL NOT BE LOCATED IN STAIRS

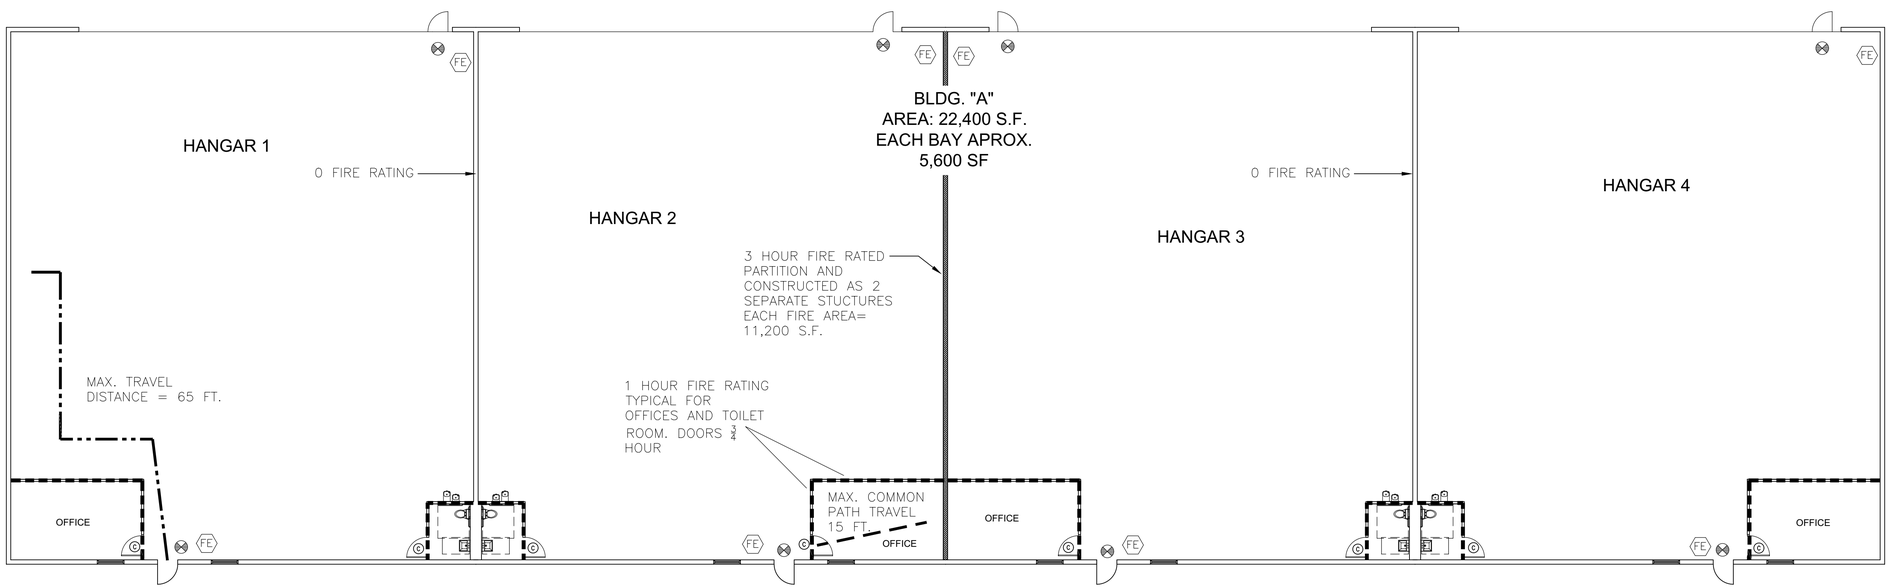

A4 BUILDING A LIFE SAFETY PLAN
3/32" = 1'-0"

GENERAL NOTES:
UN–SPRINKLERED

FIRE RESISTANCE RATING LEGEND

PARTITION LABEL		DOOR LABEL	
	ZERO HOUR FIRE RATED PARTITION	A	NOT USED
	ONE HOUR FIRE RATED PARTITION	B	90 MIN FIRE LABEL DOOR
	TWO HOUR FIRE RATED PARTITION	C	45 MIN FIRE LABEL DOOR
	THREE HOUR FIRE RATED PARTITION	20	20 MIN FIRE LABEL DOOR

LEGEND

- TRAVEL DISTANCE PATH
- COMMON PATH
- DEAD–END CORRIDOR
- CLG. MT'D. DIRECTIONAL EXIT SIGN
- WALL MT'D. EXIT SIGN
- FE FIRE EXTINGUISHER – SEMI–RECESSED CABINET W/ 3A 4BC RATING
- FIRE EXTINGUISHER – WALL MOUNTED W/BRACKET W/ 3A 4BC RATING
- F.D. KEY F.D. KEY BOX LOCATION (VERIFY W/ F.D. MANUF. TYPE KNOX OR SUPRA)
- EMERGENCY LIGHT

EGRESS DATA FBC S–1 OCC

OCCUPANCY LOAD	S–1	
MAX. TRAVEL DISTANCE TO EXIT (FT)	200'	
MAX. DEAD END CORRIDOR	20'	
MIN. CORRIDOR WIDTH	44"	
MIN. CLEAR OPENING	32"	
MAX. COMMON PATH (FT)	50'	

OCCUPANCY LOAD SUMMARY FBC CH 10

OCCUPANCY CLASSIFICATION: GROUP S–1

CAPACITY PER F.B.C 1004.5 AIRCRAFT HANGARS 1 PER 500 GROSS

EAXH HANGAR IS 5600 SF THEREFORE OCCUPANT LOAD IS 5600 / 500= 11.2 THERFORE 13 PEOPLE EACH BAY.

INTERIOR FINISH CLASSIFICATION LIMITATIONS

OCCUPANCY S–1 UN–SPRINKLERED

WALL AND CEILING	EXITS	CORRIDORS	OTHER SPACES
	B	B	C

CLASS A– FLAME SPREAD 0–25
CLASS B– FLAME SPREAD 26–75
CLASS C– FLAME SPREAD 76–200

FLOORS	CLASS I OR II ARE PERMITTED

CLASS I – CRITICAL RADIANT FLUX, NOT LESS THAN 0.45 W/cm2
CLASS II– CRITICAL RADIANT FLUX, NOT LESS THAN 0.22 W/cm2 BUT NOT LESS THAN 0.45

LIFE SAFETY SYMBOLS

- COMMON PATH OF TRAVEL
- DEAD END
- MAXIMUM TRAVEL DISTANCE
- EXIT SIGNS, WITH OR WITHOUT DIRECTION ARROWS
- EMERGENCY LIGHTS
- FIRE EXTINGUISHERS DISTRIBUTED PER REQUIREMENTS ON ALL LEVELS. — FE FIRE EXTINGUISHER 2A–10B:C 5 LB.

GALLO HERBERT ARCHITECTS
1311 W NEWPORT CENTER DRIVE DEERFIELD BEACH, FLORIDA 33442 PH. 954.794.0300 FAX. 954.794.0301

AA226001731
SEAL
WILLIAM J. GALLO FL AR0008440
Brian Herbert
Digitally signed by Brian Herbert
Date: 2022.06.30 14:33:42 -04'00'
BRIAN P. HERBERT FL AR0015474

PROJECT
POMPANO BEACH AIR PARK PARCEL Y

601 NE 10TH ST.
POMPANO BEACH
FL 33060

OWNER
POMPANO BEACH

COMPANY NAME

REVISIONS

No.	Description	Date
	D.R.C. SUBMITTAL	2022-06-28

PROJECT STATUS
D.R.C.

DATE
2021-03-24

PROJECT NUMBER
83-2020

SCALE
AS SHOWN

DRAWN BY JET
CHECKED BY JET

DRAWING TITLE
BLDG. "A"
LIFE SAFETY PLAN

DRAWING NUMBER
A-A102

P&Z
PZ22-12000020
11/16/2022