

Benjamin
P. Boyt P.E.


Digitally signed by
Benjamin P. Boyt P.E.
Date: 2024.05.10
17:08:13 -05'00'

SITE LIGHTING LAYOUT BASED ON THE FOLLOWING REQUIREMENTS:
20'-0" MAXIMUM POLE HEIGHT
1 FC MINIMUM AT GROUND LEVEL OF VEHICULAR USE AREAS
3 FOOTCANDLE MAXIMUM AT 5'-0" ABOVE GROUND AT THE PROPERTY LINE
MOTION SENSING SHALL BE ACCOMPLISHED VIA CONTROLS METHODS
WALLPACKS FULLY SHEILDED WITH OUTPUT OF 900 LUMENS OR LESS

SITE LIGHTING FIXTURE SCHEDULE										
MARK	TYPE	MANUFACTURER	MODEL #	LAMP	WATTS	LUMEN	TEMP (K)	VOLT	LOCATION	DESCRIPTION
JE	EXTERIOR EGRESS FLOODLIGHT	LITHONIA	WDGE2 LED P0 40K 80CRI T4M MVOLT E10WH	LED	7 W	712	4000k	MULTI	SURFACE WALL	WALL-MOUNTED LIGHTING FIXTURE WITH TYPE IV MEDIUM DISTRIBUTION, EMERGENCY BATTERY BACKUP
K	EXTERIOR FLOODLIGHT	LITHONIA	WDGE2 LED P0 40K 80CRI T1S MVOLT	LED	7 W	699	4000k	MULTI	SURFACE WALL	WALL-MOUNTED LIGHTING FIXTURE WITH TYPE I SHORT DISTRIBUTION
K1	EXTERIOR FLOODLIGHT	LITHONIA	WDGE2 LED P0 40K 80CRI T4M MVOLT	LED	7 W	712	4000k	MULTI	SURFACE WALL	WALL-MOUNTED LIGHTING FIXTURE WITH TYPE IV MEDIUM DISTRIBUTION
L	EXTERIOR CANOPY	LITHONIA	CNY LED ALO SWW2 UVOLT PE PIR M2	LED	36 W	4477	4000k	120-347V	SURFACE	CANOPY FIXTURE WITH INTEGRATED PHOTOCELL AND OCCUPANCY SENSOR. COORDINATE FINISH WITH ARCHITECT
LE	EXTERIOR CANOPY, BATTERY BACKUP	LITHONIA	CNY LED ALO SWW2 UVOLT PE PIR M2 CNYEK E7WC M12	INC.	36 W	4477	4000k	120-347V	SURFACE	CANOPY FIXTURE WITH INTEGRATED PHOTOCELL, OCCUPANCY SENSOR, AND EMERGENCY BATTERY. COORDINATE FINISH WITH ARCHITECT
M	EXTERIOR CYLINDER	GOTHAM	ICO4SC 40_05 AR LD 35D MVOLT	LED	7 W	688	4000k	MULTI	SURFACE	CYLINDER DOWNLIGHT WITH CLEAR MATTE DIFFUSE REFLECTOR, 35 DEGREE BEAM ANGLE
ME	EXTERIOR CYLINDER, BATTERY BACKUP	GOTHAM	ICO4SC 40_05 AR LD 35D MVOLT E6W	LED	7 W	688	4000k	MULTI	SURFACE	CYLINDER DOWNLIGHT WITH CLEAR MATTE DIFFUSE REFLECTOR, 35 DEGREE BEAM ANGLE, AND INTEGRAL BATTERY BACKUP
M1E	EXTERIOR CYLINDER, BATTERY BACKUP	GOTHAM	ICO4SC 40_05 AR LD 60D MVOLT E6W	LED	7 W	688	4000k	MULTI	SURFACE	CYLINDER DOWNLIGHT WITH CLEAR MATTE DIFFUSE REFLECTOR, 60 DEGREE BEAM ANGLE, AND INTEGRAL BATTERY BACKUP
S1	SITE POLE	LITHONIA	DSX0 LED P3 40K 70CRI T4M	LED	69 W	8926	4000k	MULTI	POLE	SINGLE HEAD FIXTURE, MAX. 20'-0" A.F.G. POLE HEIGHT, TYPE IV MEDIUM DISTRIBUTION
S2	SITE POLE	LITHONIA	DSX0 LED P3 40K 70CRI T5M HS	LED	69 W	6674	4000k	MULTI	POLE	SINGLE HEAD FIXTURE, MAX. 20'-0" A.F.G. POLE HEIGHT, TYPE V MEDIUM DISTRIBUTION, HOUSESIDE SHIELD
NOTES										
1	FIXTURES SHOWN ON PLANS WITH AN "E" SUFFIX SHALL INCLUDE MANUFACTURER'S EMERGENCY BATTERY BACKUP SYSTEM INCLUDING BATTERY, CHARGING CIRCUIT, AND AUTOMATIC SWITCHING BASED ON MONITORING THE PRESENCE OF POWER ON THE UNSWITCHED (HOT) LEG OF THE CIRCUIT.									
2	MOTION SENSING SHALL BE ACCOMPLISHED VIA INTEGRATED FIXTURE OPTIONS AND/OR CONTROLS METHODS.									
3	DUSK TO DAWN OPERATION SHALL BE ACCOMPLISHED VIA INTEGRATED FIXTURE OPTIONS AND/OR CONTROLS METHODS.									
4	COORDINATE ALL FIXTURE FINISHES WITH ARCHITECT.									

DESIGN	REVIEW	CHECK
MAB	BPB	BPB

REVISIONS

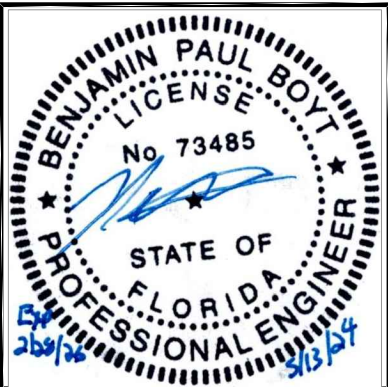

BOYT ENGINEERING
400 N. MARKET ST.
MARION, IL 62959
618-964-9418
FLORIDA LIC #30192



PROJECT TITLE
CONDO HOTEL
872 MCNAB ROAD
POMPANO BEACH, FLORIDA 33060

CONFIDENTIAL

THESE PLANS CONTAIN THE CONFIDENTIAL PROPERTY AND EXCLUSIVE DESIGNS OF BOYT ENGINEERING. ANY USE OF THESE DRAWINGS OR THE INFORMATION CONTAINED HEREIN FOR ANY REASON OTHER THAN AS EXPRESSLY AUTHORIZED BY BOYT ENGINEERING IS STRICTLY PROHIBITED. THESE DRAWINGS HAVE BEEN DISTRIBUTED WITH THE UNDERSTANDING THAT ANYONE RECEIVING OR OTHERWISE OBTAINING POSSESSION OF THEM WILL BE EXPRESSLY NOTIFIED OF THEIR CONFIDENTIAL NATURE.

DATE	05-13-2024
SHEET TITLE	SITE LTG SCHEDULE
JOB NO.	
SHEET	SL1.2

DRC
PZ23-12000045
07/03/2024