








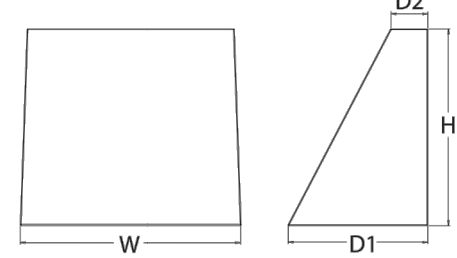
WDGE1 LED Architectural Wall Sconce







Specifications

Depth (D1): 5.5"
Depth (D2): 1.5"
Height: 8"
Width: 9"
Weight: 9 lbs
 (without options)





Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit www.aaculitybrands.com/designselect.
 *See ordering tier for details

WDGE LED Family Overview

Luminaire	Optics	Standard EM, 0°C	CoEM EM, -20°C	Sensor	Approximate Lumens (4000K, 40CRI)							
					P0	P1	P2	P3	P4	P5	P6	
WDGE1 LED	Visual Comfort	4W	1W	—	750	1,200	2,000	—	—	—	—	—
WDGE2 LED	Visual Comfort	10W	18W	Standalone / night	—	1,200	2,000	3,000	4,500	6,000	—	—
WDGE2 LED	Precision Reflective	10W	18W	Standalone / night	700	1,200	2,000	3,200	4,200	—	—	
WDGE3 LED	Precision Reflective	15W	18W	Standalone / night	6,000	7,500	8,500	10,000	12,000	—	—	
WDGE4 LED	Precision Reflective	—	—	Standalone / night	—	12,000	16,000	18,000	20,000	22,000	25,000	

Ordering Information

EXAMPLE: WDGE1 LED P2 40K 80CRI VF MVOLT SRM PE DDBXD

Series	Package	Color Temperature	CRI	Distribution	Voltage	Mounting
WDGE1 LED	P0	27K / 2700K	80CRI	VF	Visual comfort forward throw	Shipped included SRM Surface mounting bracket ICW Indirect Canopy (Cling Washer bracket (by lamp locations only)) Shipped separately AWS Self-drill Architectural wall spacer* P8BW *Surface-mount back box (log, kit, right-hand entry) (Use when there is no junction box available.)
	P1	30K / 3000K	90CRI	VF	Visual comfort wide	
	P2	35K / 3500K	—	—	—	
	40K / 4000K	—	—	—		
	50K / 5000K	—	—	—		

Options	Finish
E4WH Emergency battery backup, Certified in CA Title 20 MAEDBS (4W, 0°C max)	DDBXD Dark bronze
PE Photocell, Batten type	DBLXD Black
DS Dual-switching lumens with 2 drivers and 2 light engines (see page 3 for details)	DBALD Natural aluminum
DWG 0-10V dimming wires pulled outside fixture (for use with an external control, ordered separately)	DW4XD White
BCE Bottom conduit entry for back box (P8BW), Total of 4 entry points.	DS5XD Sandstone
DSLE Dual Switching (1 Driver, 2 Light Engines)	
CE Cassia Construct*	
	DDBXD Dark bronze
	DBLXD Black
	DBALD Natural aluminum
	DW4XD White
	DW5XD Sandstone
	DS5XD Sandstone

FIXTURE TYPE "W1"

Accessories

Customized options available.

WDGEAW5 500BD	WDGE 500W Architectural Wall Space (specify finish)
WDGE1P8BW 500B1	WDGE1 surface-mounted back box (specify finish)

For the full list of options on the page to see all interactive elements.

Introduction

The WDGE LED family is designed to meet specifier's every wall-mounted lighting need in a widely accepted shape that blends with any architecture. The clean rectilinear design comes in four sizes with lumens packages ranging from 1,200 to 25,000 lumens, providing true site-wide solution.

WDGE1 delivers up to 2,000 lumens with a soft, non-polluted light source, creating a visually comfortable environment. The compact size of WDGE1, with its integrated emergency battery backup option, makes it an ideal over-the-door wall-mounted lighting solution.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance Package	System Name	2700K, 80 CRI					3000K, 80 CRI					3500K, 80 CRI					4000K, 80 CRI					5000K, 80 CRI				
		Lumens	PM	U	U	U	Lumens	PM	U	U	U	Lumens	PM	U	U	U	Lumens	PM	U	U	U					
P0	7W	VF	693	99	0	0	718	103	0	0	0	739	106	0	0	0	759	108	0	0	0	764	109	0	0	0
		VW	694	99	0	0	720	103	0	0	0	740	106	0	0	0	760	109	0	0	0	766	109	0	0	
P1	10W	VF	1,120	112	0	0	1,161	116	0	0	0	1,194	119	0	0	0	1,227	123	0	0	0	1,235	123	0	0	0
		VW	1,122	112	0	0	1,163	116	0	0	0	1,196	120	0	0	0	1,229	123	0	0	0	1,237	124	0	0	
P2	15W	VF	1,806	120	1	0																				

[illegible]

THIS SHEET IS FOR PHOTOMETRIC
INFORMATION ONLY. ALL OTHER
ELECTRICAL DESIGN IS UNDER A
SEPARATE PERMIT.

PRIOR TO SUBMITTING THE BID, THE CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS AND INFORM THE ARCHITECT AND THE ENGINEER OF ANY DISCREPANCY BETWEEN THESE DOCUMENTS AND THE EXISTING CONDITIONS AND SHALL INCLUDE IN THE BID TO CORRECT THE SAME AS DIRECTED. THE ENGINEER AND THE ARCHITECT, ARE NOT RESPONSIBLE FOR ANY ADDITIONAL COSTS RESULTING FROM VERIFIABLE EXISTING CONDITIONS DISCOVERED AFTER CONTRACT HAS BEEN AWARDED. NO CHANGES SHALL BE MADE TO THESE PLANS WITHOUT PRIOR APPROVAL FROM THE ENGINEER OF RECORD. ALL CHANGES SHALL BE SUBMITTED FOR REVIEW PRIOR TO INSTALLATION. NOT FOR BID UNTIL PERMIT SET HAS BEEN ISSUED.

	enclave	REVISIONS: - #1 DRS RESUBMITTAL 02-25-2026 - - - - - - - -	#25067 S.E. 5TH STREET TOWNHOMES architecture + energy of intelligence INTELA E FOR: MARSAL MAINTENANCE CORP. 3305 S.E. 5TH STREET POMPANO BEACH, FL 33062 office: 561.672.7124 website: intelae.com 1615 south federal highway + suite 206 boca raton + florida + 33432
energy		DATE: 11-18-2025 DRAWN / CHECKED: DL PERMIT: CONSTRUCTION:	

©2025 - #AR0013630

DRC
PZ25-12000046
06/03/2026