


Luminaire Schedule								
Symbol	Qty	Label	Arrangement	Description	LLF	Luminaire Lumens	Luminaire Watts	Total Watts
SB	9	SB	Single	Cree Lighting OSQL-B-30L-40K7-4M-XX-NM-XX / OSQ-BLSLF, Pole Mount	0.900	22298	202	1818
WA	3	WA	Single	Cree Lighting OSQL-B-30L-40K7-4M-XX-NM-XX, Wall Mount	0.900	29097	202	606

Calculation Summary								
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min	
SPill	ILLUMINANCE	Fc	0.04	0.5	0.0	N.A.	N.A.	
Parking Lot	ILLUMINANCE	Fc	3.00	8.5	1.0	3.00	8.50	

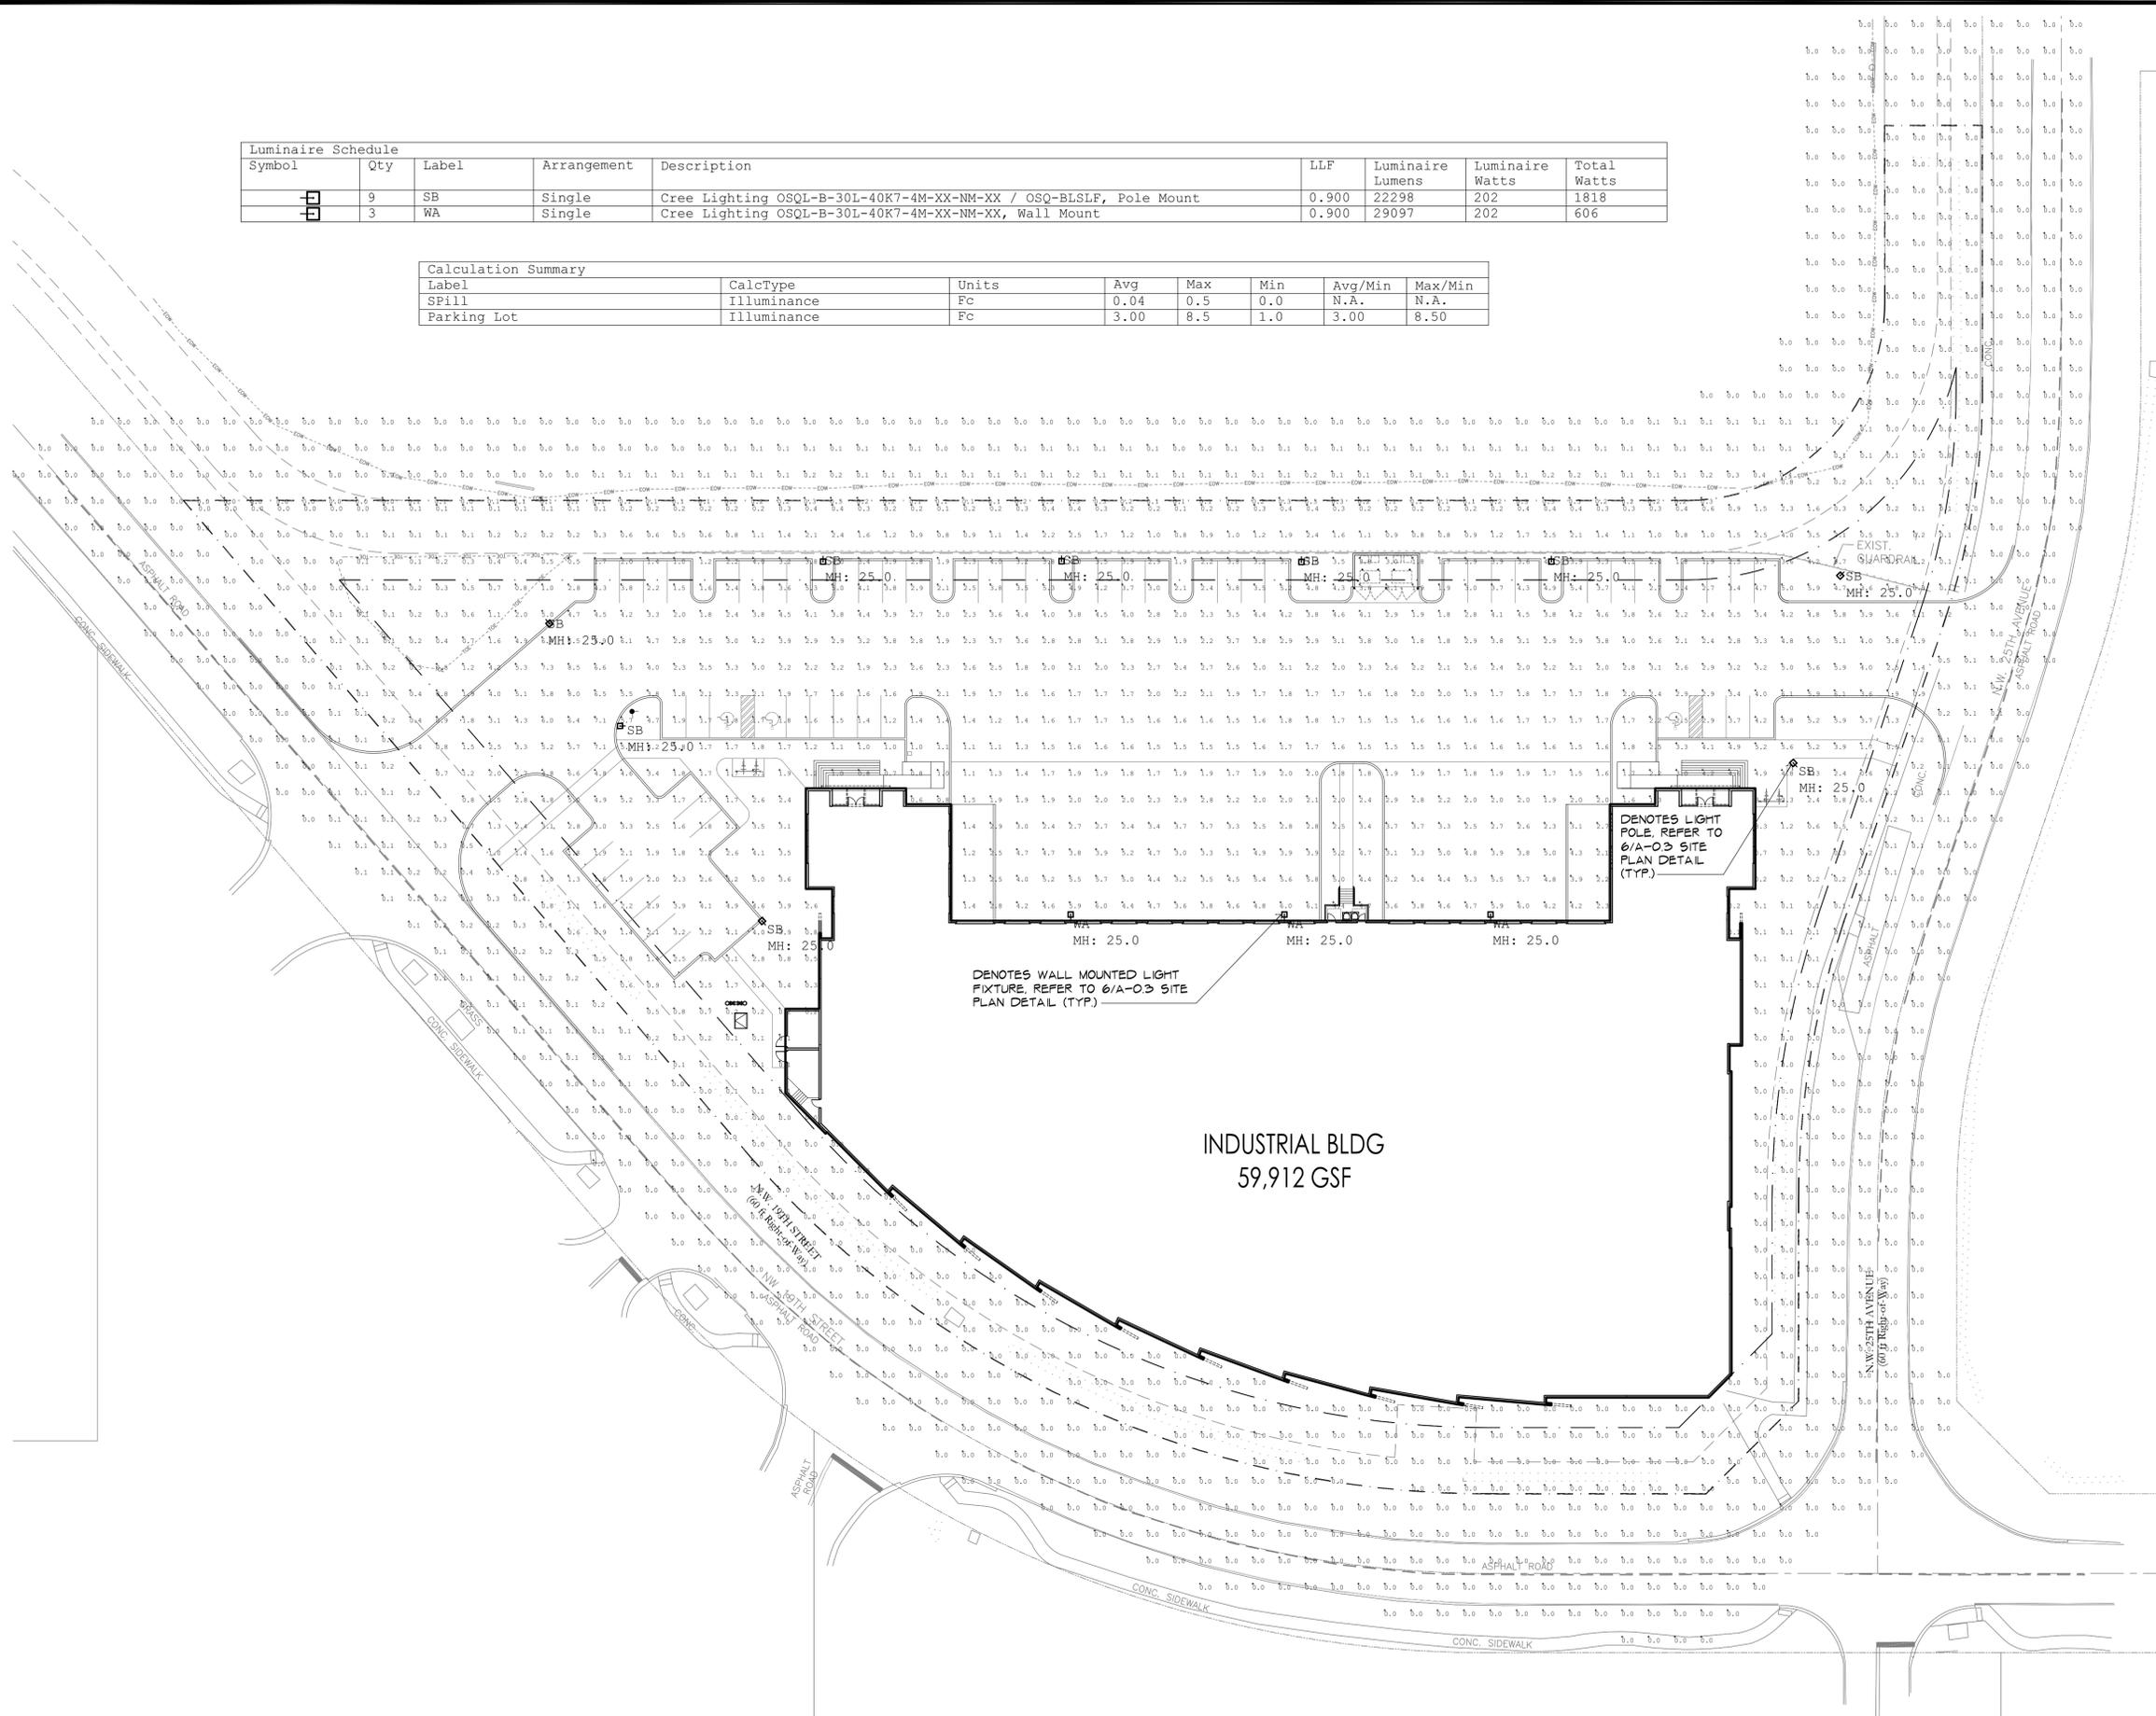

**FIRST POMPANO
LOGISTICS CENTER**
 2551 NW 19TH STREET
 POMPANO BEACH, FL 33069

NO. DATE REVISION
 ALL DRAWINGS, SPECIFICATIONS AND RELATED DOCUMENTS ARE THE COPYRIGHT PROPERTY OF THE ARCHITECT AND MUST BE RETURNED UPON REQUEST. REPRODUCTION OF DRAWINGS, SPECIFICATIONS AND RELATED DOCUMENTS IN PART OR WHOLE IS FORBIDDEN WITHOUT THE ARCHITECT'S WRITTEN PERMISSION.
 CONTRACTOR MUST CHECK AND VERIFY ALL DIMENSIONS AND FIELD CONDITIONS AND NOTIFY ARCHITECT/ENGINEER IMMEDIATELY OF ANY DISCREPANCIES.



Digitally signed by Michael Hanlon
 Date: 2022.11.17 13:44:31-05'00'

MICHAEL W. HANLON
 FLORIDA REGISTERED ARCHITECT - REG. NUMBER: AB0019720
 ELECTRONIC SIGNATURE SERIAL NUMBER:

HNM PROJECT NUMBER:
20-043.1
 ISSUED DATE:
2022-11-17
 SCALE:
1" = 30'-0"



TITLE:
**PHOTOMETRICS
SITE PLAN**

DRAWING NUMBER:

DRC

PZ22-12000042
12/21/2022