


## TYP. ROADWAY SECTION

| ENGINEERING STANDARDS 2025 | | |
|---|---|---|
| REVISIONS BY / DATE | ENGINEERING DIVISION CITY OF POMPANO BEACH | TYP. ROADWAY SECTION |
| | SCALE: N.T.S. | DATE: MAY 2022 DWG. NO. 314-1 |

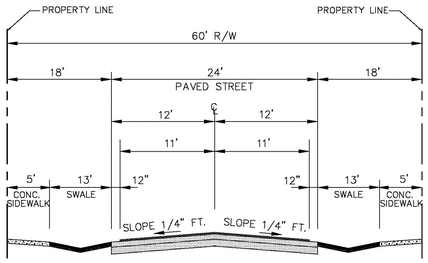


## TYPICAL SCREEN FOR UTILITIES

NOTES

PLEASE NOTE THAT AS PER CITY ORDINANCE(S) 50.02(A) (4) AND 100.35(E), STREET TREES SHALL NOT BE PLACED ON TOP OF OR 5' OF EITHER SIDE OF ANY CITY OWNED UTILITY INFRASTRUCTURE. ALSO, PLEASE NOTE THAT NO TREES SHRUBBERY OR OBSTRUCTION SHALL BE PLACED WITHIN A 3' RADIUS OF A CITY OWNED LATERAL CLEANOUT OR WATER & OR REUSE METER.

| ENGINEERING STANDARDS 2025 | | |
|---|---|---|
| REVISIONS BY / DATE: TCW / APRIL 2010 | ENGINEERING DIVISION CITY OF POMPANO BEACH | TYPICAL SCREEN FOR UTILITIES |
| | SCALE: N.T.S. | APPROVED BY: DATE: MAY 2022 DWG. NO. 315-1 |

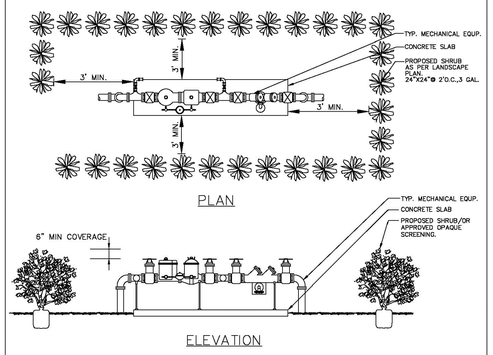


## TREE LOCATIONS REQUIRED IN PUBLIC R/W ON UTILITY EASEMENTS

NOTES

PLEASE NOTE THAT AS PER CITY ORDINANCE(S) 50.02(A) (4) AND 100.35(E), STREET TREES SHALL NOT BE PLACED ON TOP OF OR 5' OF EITHER SIDE OF ANY CITY OWNED UTILITY INFRASTRUCTURE. ALSO, PLEASE NOTE THAT NO TREES SHRUBBERY OR OBSTRUCTION SHALL BE PLACED WITHIN A 3' RADIUS OF A CITY OWNED LATERAL CLEANOUT OR WATER & OR REUSE METER.

| ENGINEERING STANDARDS 2025 | | |
|---|---|---|
| REVISIONS BY / DATE | ENGINEERING DIVISION CITY OF POMPANO BEACH | REQUIRED TREE LOCATIONS |
| | SCALE: N.T.S. | APPROVED BY: DATE: MAY 2022 DWG. NO. 316-1 |

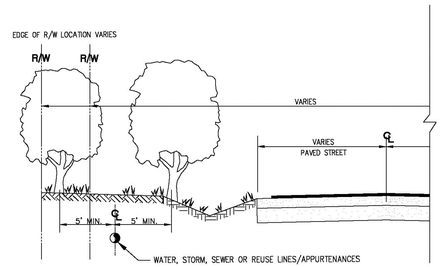


NOTES:
1. STEEL PER FDOT INDEX 425-010.
2. MINIMUM 18" SUMP.
3. TYPE II CEMENT, MINIMUM 4000 PSI COMPRESSIVE STRENGTH AT 28 DAYS.

| ENGINEERING STANDARDS 2025 | | |
|---|---|---|
| REVISIONS BY / DATE: A.S. / 04-24 | ENGINEERING DIVISION CITY OF POMPANO BEACH | PRECAST DRAINAGE STRUCTURE |
| | SCALE: N.T.S. | DATE: APRIL 2024 DWG. NO. 400-1A |




THIS METHOD OF INLET PROTECTION IS APPLICABLE WHERE THE INLET DRAINS A RELATIVELY FLAT AREA (SLOPE NO GREATER THAN 5%) WHERE THE INLET SHEET OR OVERLAND FLOWS (NOT EXCEEDING 1 C.F.S.) ARE TYPICAL. THE METHOD SHALL NOT APPLY TO INLETS RECEIVING CONCENTRATED FLOWS, SUCH AS IN STREET OR HIGHWAY MEDIANS
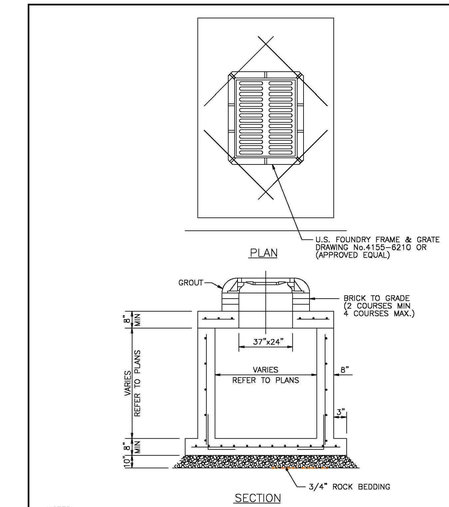
## FILTER FABRIC DROP INLET SEDIMENT FILTER

| ENGINEERING STANDARDS 2025 | | |
|---|---|---|
| REVISIONS BY / DATE | ENGINEERING DIVISION CITY OF POMPANO BEACH | FILTER FABRIC DROP INLET SEDIMENT FILTER |
| | SCALE: N.T.S. | DATE: MAY 2022 DWG. NO. 508-1 |

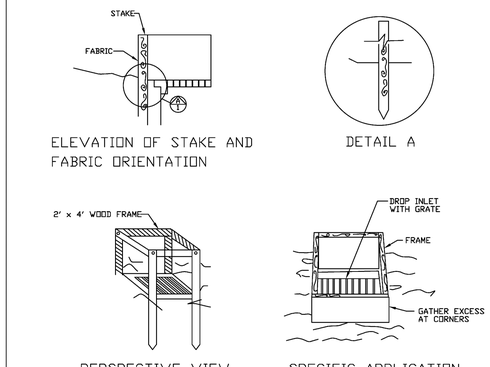


## SILT FENCE

### EROSION CONTROL GENERAL NOTES

1. SILT FENCE AND TURBIDITY BARRIERS MUST REMAIN IN PLACE AND BE MAINTAINED AT ALL LOCATIONS SHOWN IN THE DRAWINGS UNTIL CONSTRUCTION ID COMPLETED AND SOILS ARE STABILIZED AND VEGETATION HAS BEEN.
2. CPMTRACTOR SHALL SUBMIT SCHEDULE FOR THE INSTALLATION, INSPECTION AND MAINTENANCE THE EROSION CONTROLS FEATURES AS SHOWN IN THE DRAWINGS OR AS DIRECTED BY THE DESIGN ENGINEER. THE SCHEDULE SHALL SPECIFICALLY SHALL SPECIFICALLY INDICATE THE SEQUENCE OF CLEARING, EARTH WORK OPERATIONS, AND WHEN THE EROSION CONTROL FEATURE WILL BE INSTALLED, INSPECTED, AND MAINTAINED. IT SHALL ALSO INCLUDE METHODS TO PREVENT POLLUTION OF STREAM, LAKES, TIDAL WATERS, CANALS, AND IMPOUNDMENTS. ESTABLISHED.

| ENGINEERING STANDARDS 2025 | | |
|---|---|---|
| REVISIONS BY / DATE | ENGINEERING DIVISION CITY OF POMPANO BEACH | SILT FENCE |
| | SCALE: N.T.S. | DATE: MAY 2022 DWG. NO. 509-1 |

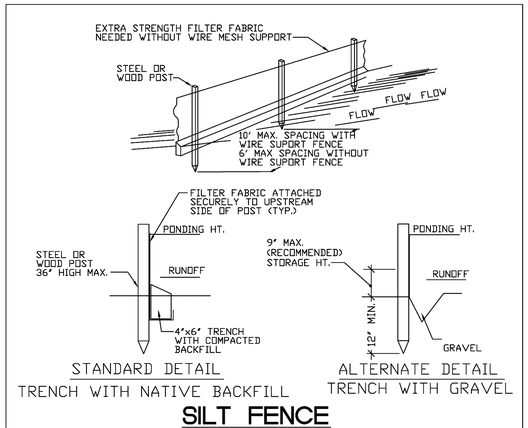


NOTES:
1. INSPECT AND REPAIR FENCE AFTER EACH STORM EVENT AND REMOVE SEDIMENT WHEN NECESSARY.
2. REMOVED SEDIMENT SHALL BE DEPOSITED TO AN AREA THAT WILL NOT CONTRIBUTE SEDIMENT OFF-SITE AND CAN BE PERMANENTLY STABILIZED.
3. SILT FENCE SHALL BE PLACED ON SLOPE CONTOURS TO MAXIMIZE PONDING EFFIENCY.

## ATTACHING TWO SILT FENCES

| ENGINEERING STANDARDS 2025 | | |
|---|---|---|
| REVISIONS BY / DATE | ENGINEERING DIVISION CITY OF POMPANO BEACH | ATTACHING TWO SILT FENCES |
| | SCALE: N.T.S. | DATE: MAY 2022 DWG. NO. 509-2 |

DRC
P225-12000046
06/03/2026
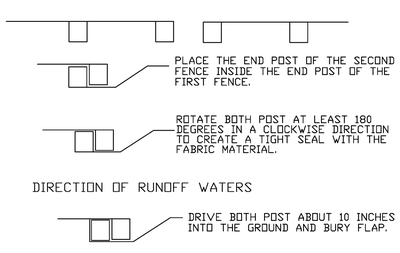
| NO. | DATE | REVISIONS |
|---|---|---|
| 1. | 2026/02/09 | CITY COMMENTS |

# TOWNHOMES

3305 SE 5TH STREET
POMPANO BEACH, FL 33062

CITY STANDARD DETAILS

Globe Engineering, Inc.
Civil Engineering - Land Planning - Construction Management
4839 SW 148 Avenue, Suite 507
Port Lauderdale, FL 33330
Phone: 954-316-7628
www.civil-engineer.us
FBPE REGISTRY No. 8604

Martin Pilote
Digitally signed by Martin Pilote
Date: 2026.02.27 16:33:51 -05'00'

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY MARTIN PILOTE USING A DIGITAL SIGNATURE AND DATE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES. PRINTED COPIES ARE ONLY VALID IF IT INCLUDES AN INK ORIGINAL HAND SIGNATURE.

MARTIN PILOTE LICENSE No 55992 STATE OF FLORIDA PROFESSIONAL ENGINEER

| | |
|---|---|
| DESIGNED: MP | DATE: |
| DRAWN: SKC | 2/9/2026 |
| PROJECT NO: | 2025-011 |
| DRAWING NAME: | C-10 |
| SHEET NO: | C-10 OF 11 |

ATTENTION IS DIRECTED TO THE FACT THAT THESE PLANS MAY HAVE BEEN REDUCED IN SIZE BY REPRODUCTION. THIS MUST BE CONSIDERED WHEN OBTAINING SCALED DATA.

Sunshine811
Call 811 or www.sunshine811.com two full business days before digging to have utilities located and marked.
Check positive response codes before you dig!

OWNERSHIP AND USE OF THESE DOCUMENTS & SPECIFICATIONS ARE INSTRUMENT OF SERVICE AND SHALL REMAIN THE PROPERTY OF GLOBE ENGINEERING, INC. WHETHER THE PROJECT THEY ARE MADE FOR IS EXECUTED OR NOT.

THESE DOCUMENTS, DETAILS & SPECIFICATIONS SHALL NOT BE USED, BY ANYONE, ON OTHER PROJECTS, FOR ADDITIONS TO THIS PROJECT BY OTHERS, EXCEPT BY AGREEMENT IN WRITING BY GLOBE ENGINEERING, INC.

THIS PLAN MAY NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION FROM GLOBE ENGINEERING, INC.
© 2026 — GLOBE ENGINEERING, INC.

© 2025 GLOBE ENGINEERING, INC.