





NOTES: CRITICAL PROTECTION ZONE: THE AREA SURROUNDING A TREE WITHIN A CIRCLE DESCRIBED BY A RADIUS OF ONE FOOT FOR EACH INCH OF THE TREE TRUNK DIAMETER AT 54" ABOVE FINISHED GRADE, FOR GROUPS OF TREES, PLACE BARRICADES BETWEEN TREES AND CONSTRUCTION ACTIVITY. ANY CONSTRUCTION ACTIVITY WITHIN THE "CRITICAL PROTECTION ZONE" SHALL BE BROUGHT TO THE ATTENTION OF THE LANDSCAPE ARCHITECT IMMEDIATELY!

DO NOT PLACE ANY TREE BARRICADE ON PRIVATE PROPERTY BEGIN ALL TREE BARRICADES AT THE ROW LINE.

*TREE PROTECTION BARRICADES SHALL BE LOCATED TO PROTECT A MINIMUM OF 75% OF THE CRITICAL PROTECTION ZONE.

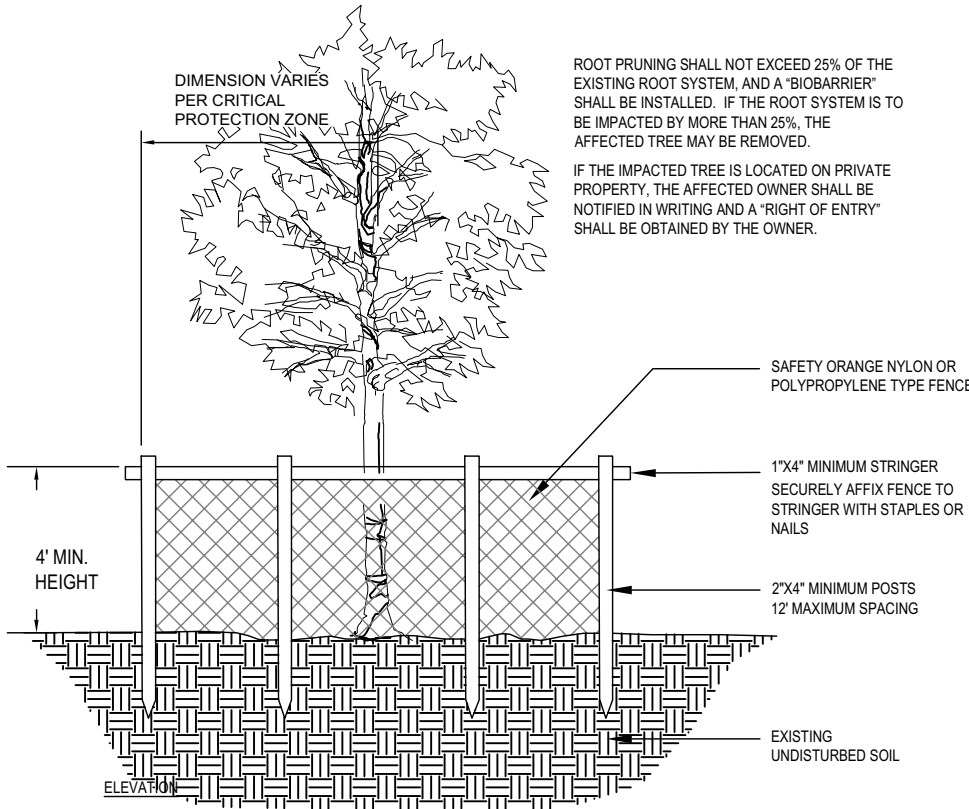

TREE BARRICADE DETAIL

LEGEND	
 ###	TREE/PALM TO BE RELOCATED
 ###	TREE/PALM TO BE REMOVED
 ###	EXISTING PALMS/ TREES TO BE PROTECTED IN PLACE

TREE DISPOSITION LIST								
No.	Botanical Name	Common Name	DBH (in.)	Canopy (Dia.)	Canopy (SF)	Height O.A. (ft.)	Condition	Disposition
1	Quercus geminata	Sand Live Oak	6	18	1017	23	Good	Remove
2	Quercus geminata	Sand Live Oak	4	14	615	18	Good	Remove
3	Quercus geminata	Sand Live Oak	6	19	1134	24	Good	Remove
4	Acacia auriculiformis	Earleaf acacia	22	27	2289	28	Good	Remove
5	Sabal palmetto	Sabal Palm	10	12	452	17	Good	Remove
6	Sabal palmetto	Sabal Palm	10	12	452	19	Good	Remove
7	Sabal palmetto	Sabal Palm	10	12	452	20	Good	Remove
8	Quercus geminata	Sand Live Oak	15	20	1256	22	Good	Remove
9	Sabal palmetto	Sabal Palm	10	12	452	19	Good	Remove
10	Sabal palmetto	Sabal Palm	10	34	3630	25	Good	Remove
11	Quercus geminata	Sand Live Oak	22	34	3630	28	Good	Remove
12	Sabal palmetto	Sabal Palm	10	12	452	13	Good	Remove
13	Sabal palmetto	Sabal Palm	10	10	314	19	Good	Remove
14	Quercus geminata	Sand Live Oak	8	18	1017	22	Good	Remove
15	Quercus geminata	Sand Live Oak	6	17	907	23	Good	Remove
16	Quercus geminata	Sand Live Oak	9	18	1017	22	Good	Remove
17	Quercus geminata	Sand Live Oak	8	22	1520	24	Good	Remove
18	Sabal palmetto	Sabal Palm	10	12	452	17	Good	Remove
19	Quercus geminata	Sand Live Oak	10	18	1017	21	Good	Remove
20	Quercus geminata	Sand Live Oak	3	12	452	16	Good	Remove
21	Cupaniopsis anacardioides	Carrotwood	7	15	707	15	Good	Remove
22	Cupaniopsis anacardioides	Carrotwood	8	13	531	15	Good	Remove
23	Sabal palmetto	Sabal Palm	10	10	314	14	Good	Remove
24	Cupaniopsis anacardioides	Carrotwood	7	15	707	15	Good	Remove
25	Quercus geminata	Sand Live Oak	4	9	254	16	Good	Remove
101" caliper removed, 9 Palms								

101" caliper removed, 9 Palms