DRC
PZ22-12000027
07/02/2025

PLANT SPACING SHALL SUPERCEDE PLANT QUANTITY TO FILL LANDSCAPE BED.

NOTE: TREE PLANTED IN SAMPLE ROAD RIGHT-OF-WAY WILL REQUIRE A SEPARATE FDOT LANDSCAPE PERMIT

NOTE: ALL PLANTING AND IRRIGATION WORK AND MAINTENANCE, WITHIN THE SAMPLE ROAD AND NW 27TH AVENUE RIGHTS-OF-WAY, SHALL BE THE RESPONSIBILITY OF THE MATER DEVELOPER FOR THIS PROJECT

PROPOSE RIGHT-IN RIGHT-OU APPROVE BY FDOT

(DESIGN SPEED 45 MPH)

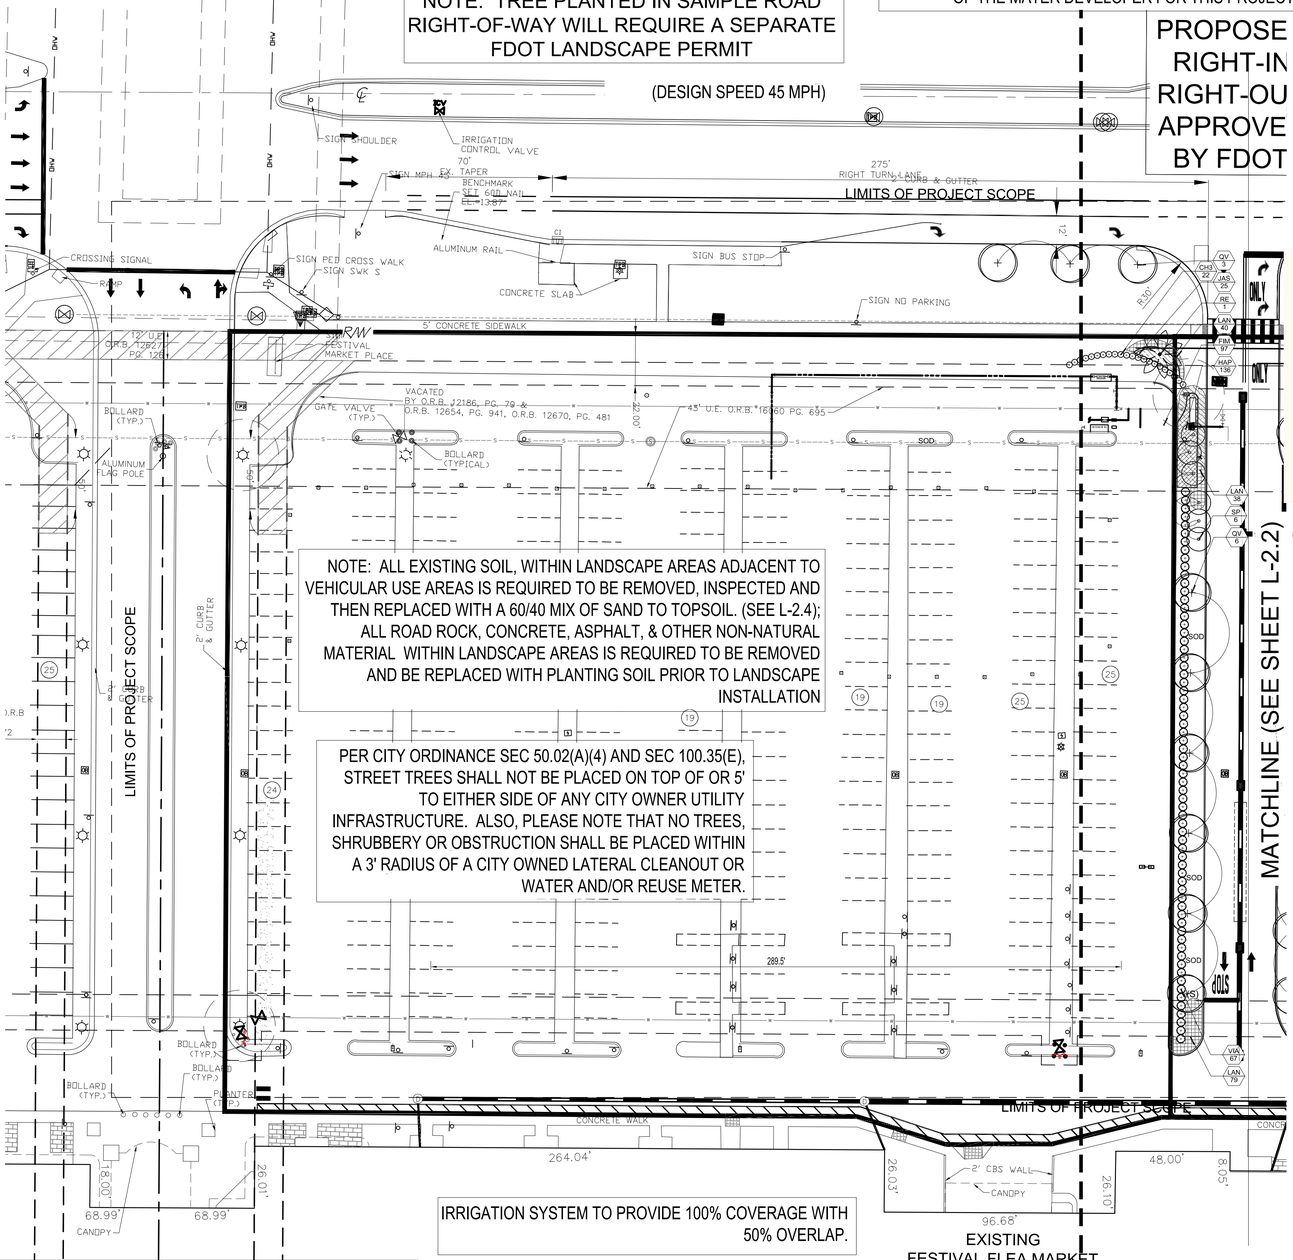

NOTE: ALL EXISTING SOIL, WITHIN LANDSCAPE AREAS ADJACENT TO VEHICULAR USE AREAS IS REQUIRED TO BE REMOVED, INSPECTED AND THEN REPLACED WITH A 60/40 MIX OF SAND TO TOPSOIL. (SEE L-2.4); ALL ROAD ROCK, CONCRETE, ASPHALT, & OTHER NON-NATURAL MATERIAL WITHIN LANDSCAPE AREAS IS REQUIRED TO BE REMOVED AND BE REPLACED WITH PLANTING SOIL PRIOR TO LANDSCAPE INSTALLATION

PER CITY ORDINANCE SEC 50.02(A)(4) AND SEC 100.35(E), STREET TREES SHALL NOT BE PLACED ON TOP OF OR 5' TO EITHER SIDE OF ANY CITY OWNER UTILITY INFRASTRUCTURE. ALSO, PLEASE NOTE THAT NO TREES, SHRUBBERY OR OBSTRUCTION SHALL BE PLACED WITHIN A 3' RADIUS OF A CITY OWNED LATERAL CLEANOUT OR WATER AND/OR REUSE METER.

IRRIGATION SYSTEM TO PROVIDE 100% COVERAGE WITH 50% OVERLAP.

ANY EXISTING SOD IN RIGHT-OF-WAY OR ON ADJACENT PROPERTY DAMAGED DURING CONSTRUCTION, SHALL BE REPLACED WITH SAME SOD SPECIES BY CONTRACTOR.

THIS SITE CONTAINS TREES THAT WILL REQUIRE REMOVAL AND/OR RELOCATION. FINAL MITIGATION REQUIREMENTS TO BE DETERMINED.

ALL HEDGED ABUTTING CITY RIGHTS OF WAY SHALL BE MAINTAINED AT A HEIGHT NO GREATER THAT 24".

NOTE: ALL ABOVE GROUND MECHANICAL EQUIPMENT SUCH AS, BUT NOT LIMITED TO, EXTERIOR UTILITY BOXES, METERS, AND TRANSFORMERS NOT CURRENTLY KNOWN OR DEPICTED SHALL BE VISUALLY SCREENED A MINIMUM OF 6" ABOVE TOP OF EQUIPMENT. BACK FLOW PREVENTERS SHALL BE PAINTED TO MATCH THE PRINCIPAL STRUCTURE.

REFER TO SHEET L-2.3 FOR PLANT MATERIALS, CODE REQUIREMENT CHART, COST ESTIMATE AND PLANTING DETAILS, AND SHEET L-2.4 FOR LANDSCAPE GENERAL NOTES.



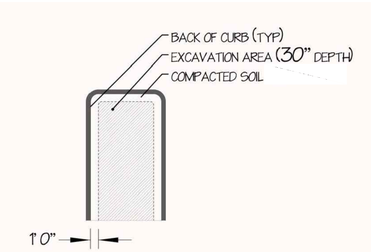

SOIL EXCAVATION DETAIL
N.T.S.

IT IS REQUIRED TO HAVE A PRE-CONSTRUCTION MEETING WITH THE URBAN FORESTRY STAFF PRIOR TO COMMENCEMENT OF ANY LANDSCAPE WORK OR SITE WORK AFFECTING EXISTING TREES. CONTACT WADE COLLUM AT 954-545-7766 or wade.collum@copbfl.com

B.C.H.C.E.D. REF. NO. 200617002

DRC
PZ22-12000027
12/03/2025

PLANT SCHEDULE

TREES	QTY	COMMON NAME	BOTANICAL NAME
BS	9	Gumbo Limbo	Bursera simaruba
CD	5	Pigeon Plum	Cocoloba diversifolia
CE2	6	Silver Button Wood	Conocarpus erectus sericeus
CS	4	Orange Geiger Tree	Cordia sebestena
LI	11	Crape Myrtle	Lagerstroemia indica `Muskogee`
LL	7	Glossy Privet	Ligustrum lucidum
QV	35	Southern Live Oak	Quercus virginiana
SPR	2	Cabbage Palmetto	Sabal palmetto
TC	9	Yellow Trumpet Tree	Tabebuia caraiba
TH	7	Pink Tabebuia	Tabebuia heterophylla
PALM TREES	QTY	COMMON NAME	BOTANICAL NAME
RE	5	Florida Royal Palm	Roystonea elata
SP	18	Cabbage Palmetto	Sabal palmetto
VM2	8	Manila Palm `double`	Veitchia merrillii
VM3	6	Montgomery Palm	Veitchia montgomeryana
SHRUBS	QTY	COMMON NAME	BOTANICAL NAME
CH3	389	Red Tip Cocoplum	Chrysobalanus icaco `Red Tip`
CHH	10	Red Tip Cocoplum	Chrysobalanus icaco `Red Tip`
CRI	9	`Queen Emma` Crinum	Crinum augustum `Queen Emma`
VIA	80	Mirrorleaf Viburnum	Viburnum awabukia
VIB	148	Sandankwa Viburnum	Viburnum suspensum
SHRUB AREAS	QTY	COMMON NAME	BOTANICAL NAME
DUR	399	Sky Flower	Duranta repens `Dwarf Golden`
HAP	776	Fire Bush	Hamelia patens `compacta`
JAS	163	Southern Wax Jasmine	Jasminum simplicifolium
MUH	77	Pink Muhly Grass	Muhlenbergia capillaris
PHX	39	Philodendron	Philodendron x xanadu
PLU	64	Plumbago	Plumbago auriculata
VO2	81	Walter`s Viburnum	Viburnum obovatum
GROUND COVERS	QTY	COMMON NAME	BOTANICAL NAME
FIM	227	Green Island Ficus	Ficus microcarpa `Green Island`
IVS	111	Dwarf Schillings Holly	Ilex vomitoria `Schillings Dwarf`
LAN	350	Gold Mound Lantana	Lantana camara `Gold Mound`
LIR	904	Lily Turf	Liriope muscari
SOD	QTY	COMMON NAME	BOTANICAL NAME
PAS	92,251 sf	Bahia Grass	Paspalum notatum

EXISTING TREE CHART

FESTIVAL MARKETPLACE - NORTH PARCEL ONLY - Pompano Beach, FL

TREE NO.	BOTANICAL NAME	COMMON NAME	DBH (ins)	HT (feet)	SPR (feet)	CONDITION
49	*Quercus virginiana*	Live Oak	15	24	30	Fair
50	*Quercus virginiana*	Live Oak	24	30	44	Fair
55	*Bucida buceras*	Black Olive	22	44	60	Fair
69	*Quercus virginiana*	Live Oak	12	24	27	Fair
70*	*Quercus virginiana*	Live Oak	18	30	36	Fair
71	*Quercus virginiana*	Live Oak	10	20	30	Fair
72*	*Quercus virginiana*	Live Oak	18	30	40	Fair
73	*Quercus virginiana*	Live Oak	13	28	34	Fair
74	*Bucida buceras*	Black Olive	30	32	42	Fair
75	*Quercus virginiana*	Live Oak	14	32	40	Fair
147	*Bucida buceras*	Black Olive	36	38	58	Fair
151	*Bursera simaruba*	Gumbo Limbo	14	26	30	Fair
153	*Bursera simaruba*	Gumbo Limbo	20	40	60	Fair
155	*Bucida buceras*	Black Olive	34	52	86	Fair
165	*Quercus virginiana*	Live Oak	16	32	40	Fair
166	*Quercus virginiana*	Live Oak	9	24	24	poor
167	*Quercus virginiana*	Live Oak	20	36	50	poor
168	*Bucida buceras*	Black Olive	21	36	60	Fair
170	*Quercus virginiana*	Live Oak	14	36	42	poor
171	*Quercus virginiana*	Live Oak	10	28	32	poor
172*	*Quercus virginiana*	Live Oak	24	34	54	Fair
173	*Quercus virginiana*	Live Oak	13	30	30	Fair
174*	*Quercus virginiana*	Live Oak	18	34	46	poor
175	*Quercus virginiana*	Live Oak	15	36	50	Fair
184	*Syagrus romanzoffiana*	Queen Palm		10	16	Fair
188	*Veitchia montgomeryana*	Montgomery Palm		16	20	Fair
189	*Veitchia montgomeryana*	Montgomery Palm		16	20	Fair
190	*Veitchia montgomeryana*	Montgomery Palm		16	20	Fair
191	*Veitchia montgomeryana*	Montgomery Palm		16	20	Fair
192	*Veitchia montgomeryana*	Montgomery Palm		16	20	Fair
193	*Veitchia montgomeryana*	Montgomery Palm		16	20	Fair
194	*Veitchia montgomeryana*	Montgomery Palm		16	20	Fair
195	*Veitchia montgomeryana*	Montgomery Palm		16	20	Fair
203	*Sabal Palmetto*	Cabbage Palm		16	16	Fair
222	*Sabal Palmetto*	Cabbage Palm		12	8	Fair
223	*Sabal Palmetto*	Cabbage Palm		20	8	Fair

REFER TO SHEET L-2.0 FOR FULL PLANT SCHEDULE

ALL AREAS LABELED AS "SOD" TO BE STENOTAPHRUM SECUNDATUM, V. 'FLORITAM' SOLID SOD, UNLESS OTHERWISE SPECIFICALLY NOTED. ALL MULCH TO BE PER SPECIFICATION FOUND ON SHEET L-2.4 UNLESS OTHERWISE SPECIFICALLY NOTED. ALL QUANTITY TAKE-OFFS BY CONTRACTOR.

Michael D Grosswirth

Digitally signed by Michael D Grosswirth
DN: c=US, o=THOMAS ENGINEERING GROUP LLC, ou=A01410C000001720E31831F00006EFAC, cn=Michael D Grosswirth
Date: 2022.08.22 09:05:37 -04'00'

COST ESTIMATE

FESTIVAL MARKET PLACE (RETAIL BUILDING AND RIGHT-OF-WAY)

Quantity	Trees	Common	Botanical	SPECIFICATIONS	CAL/DBH	HEIGHT	SPREAD	Unit Cost	Total (Whsl)
5	BS	Gumbo Limbo	Bursera simaruba	B & B	3"Cal	16` Ht	5-6`	$ 400.00	$ 8,000.00
9	LI	Crape Myrtle	Lagerstroemia indica `Tuskegee`	25 gal	2"Cal	10` Ht	5`	$ 175.00	$ 5,250.00
36	QV	Southern Live Oak	Quercus virginiana `High Rise`	B & B	4"Cal	16-18` oa	6-7`	$ 500.00	$ 17,500.00
9	TC	Yellow Trumpet Tree	Tabebuia caraiba	B & B	3"Cal	16` Ht	5-6`	$ 650.00	$ 8,450.00
	PALM TREES	Common	Botanical	SPECIFICATIONS	CAL/DBH	HEIGHT	SPREAD	Unit Cost	Total
4	R	Florida Royal Palm	Roystonea elata	B & B		20-22 `gw	18-20`	$ 500.00	$ 6,500.00
11	S	Cabbage Palmetto	Sabal palmetto	B & B		18-22` oa	10`	$ 100.00	$ 4,200.00
6	S	Queen Palm	Syagrus romanzoffiana	FG/B&B		18` Ht		$ 100.00	$ 800.00
								TOTAL:	$ 50,700.00
						TOTAL VALUE OF SPECIMEN TREES REMOVED			$ 121,772.48

PERMIT SET
MUST BE ON JOBSITE AT ALL TIMES DURING CONSTRUCTION

NOTICE
INSPECTION REQUIRED
24 HRS. PRIOR TO COMMENCING ANY WORK IN THE PUBLIC R/W CONTACT THE BROWARD COUNTY HIGHWAY CONSTRUCTION AND ENGINEERING DIVISION AT 954-577-4600 FOR INSPECTION.

NOTE:
APPROVAL OF THIS PLAN DOES NOT CONSTITUTE A PERMIT FOR CONSTRUCTION.
A PERMIT FOR CONSTRUCTION MUST BE OBTAINED FROM THE BROWARD COUNTY HIGHWAY CONSTRUCTION AND ENGINEERING DIVISION PRIOR TO COMMENCING CONSTRUCTION IN THE PUBLIC RIGHT OF WAY.

ALL MATERIALS USED AND INSTALLATIONS WITHIN THE PUBLIC RIGHT OF WAY OR EASEMENTS SHALL BE IN ACCORDANCE WITH BROWARD COUNTY HIGHWAY CONSTRUCTION AND ENGINEERING DIVISION SPECIFICATIONS.

BROWARD COUNTY HIGHWAY CONSTRUCTION AND ENGINEERING DIVISION
☐ PLAN CONSISTENT WITH PLAT REQUIREMENTS
☐ PUBLIC RIGHT OF WAY APPROVAL FOR PAVING, GRADING AND DRAINAGE
BY:_____ DATE:_____
DOES NOT INCLUDE APPROVAL OF PAVEMENT MARKING & SIGNS

THOMAS ENGINEERING GROUP
CIVIL ENGINEERS - PROJECT MANAGERS - LAND PLANNING - LANDSCAPE ARCHITECTS
6300 NW 31ST AVENUE FT. LAUDERDALE, FL 33309 P: 954-202-7000
4950 W. KENNEDY BLVD. SUITE 600 TAMPA, FL 33609 P: 813-379-1100
125 W INDIANTOWN RD. SUITE 206 JUPITER, FL 33458 P: 561-203-7903
THE INFORMATION, DESIGN, AND CONCEPTS OF THIS PLAN ARE PROPRIETARY AND SHALL NOT BE COPIED, BY USED FOR ANY PURPOSE, WITHOUT PRIOR WRITTEN AUTHORIZATION FROM THOMAS ENGINEERING GROUP, LLC. ONLY APPROVED, DATED AND SEALED PLANS SHALL BE UTILIZED FOR CONSTRUCTION.

REVISIONS:

REV:	DATE:	COMMENT:	BY:

811 KNOW WHAT'S BELOW ALWAYS CALL 811 BEFORE YOU DIG
It's fast. It's free. It's the law.
www.callsunshine.com

BUILDING PERMIT

PROJECT No.: F190044
DRAWN BY: JV
CHECKED BY: MDG
DATE: 05-23-19
CAD I.D.: F190044 - LANDSCAPE PLANS\RETAIL\

PROJECT:
FESTIVAL MARKETPLACE POMPANO BEACH, FL
FOR
URBN DESIGN
696 NE 125TH STREET MORTH MIAMI, FL 33415

THOMAS ENGINEERING GROUP
6300 NW 31ST AVENUE
FORT LAUDERDALE, FL 33309
PH: (954) 202-7000
FX: (954) 202-7070
www.ThomasEngineeringGroup.com

MICHAEL D. GROSSWIRTH LA 6666871 STATE REGISTERED LANDSCAPE ARCHITECT
This item has been digitally signed and sealed by Michael D. Grosswirth on August 22, 2022
Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.
FLORIDA REGISTRATION No. 6666871
FLORIDA BUSINESS CERTIFICATE OF AUTH. No. 27528

SHEET TITLE:
LANDSCAPE PLAN

SHEET NUMBER:
L-2.1

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY MICHAEL D. GROSSWIRTH, LA6666871 ON 2022-08-22

DRC
PZ22-12000027
10/5/2022
DRC
PZ22-12000027
10/01/2025

Last saved by Lara Bieger on Aug 22, 2022, 8:49 AM by Lara Bieger
J:\URBN DESIGN\PROJECTS\FESTIVAL MARKETPLACE\DWG\SITE PLANS\2021-06-04 RETAIL AND RACETRAC\LANDSCAPE\RETAIL & RACETRAC - 08-18-2022\F190044 - LANDSCAPE PLAN-RETAIL & RACETRAC-----XLAYOUT: L-2.1 LANDSCAPE PLAN