

### PLAN KEY (NTS)



TREES TO BE REMOVED SHALL BE CUT DOWN TO THE STUMP 12-16" ABOVE GRADE). APPLY POTASSIUM NITRATE BASED PRODUCT (TBD) TO REMAINING STUMP TO INITIATE ROTTING OF THE STUMP FOR REMOVAL. SUBMIT PRODUCT SPECIFICATION TO LANDSCAPE ARCHITECT FOR REVIEW AND APPROVAL BY THE CITY OF POMPANO BEACH URBAN FORESTER.

ALL TREE WORK TO BE PERFORMED  
BY A BROWARD COUNTY REGISTERED  
TREE TRIMMER.

PLEASE SEE SHEET L-1.1 FOR TREE  
DISPOSITION CHART

UNLESS OTHERWISE SPECIFIED, ALL EXISTING HEDGES,  
SHRUBS AND GROUND COVERS WITHIN THE SCOPE OF  
WORK AREA AREA TO BE REMOVED.

IT IS REQUIRED TO HAVE A  
PRE-CONSTRUCTION MEETING WITH THE  
URBAN FORESTRY STAFF PRIOR TO  
COMMENCEMENT OF ANY LANDSCAPE  
WORK OR SITE WORK AFFECTING EXISTING  
TREES. CONTACT WADE COLLUM AT  
954-545-7766 or [wade.collum@copbfl.com](mailto:wade.collum@copbfl.com)

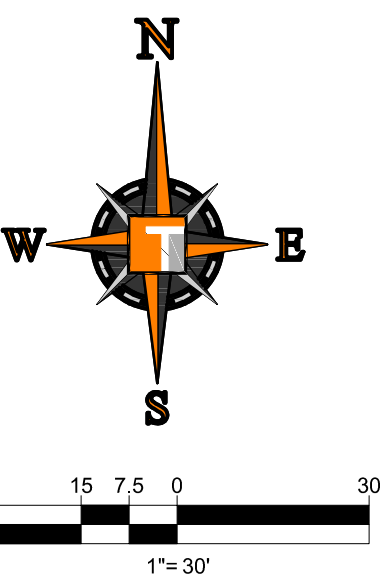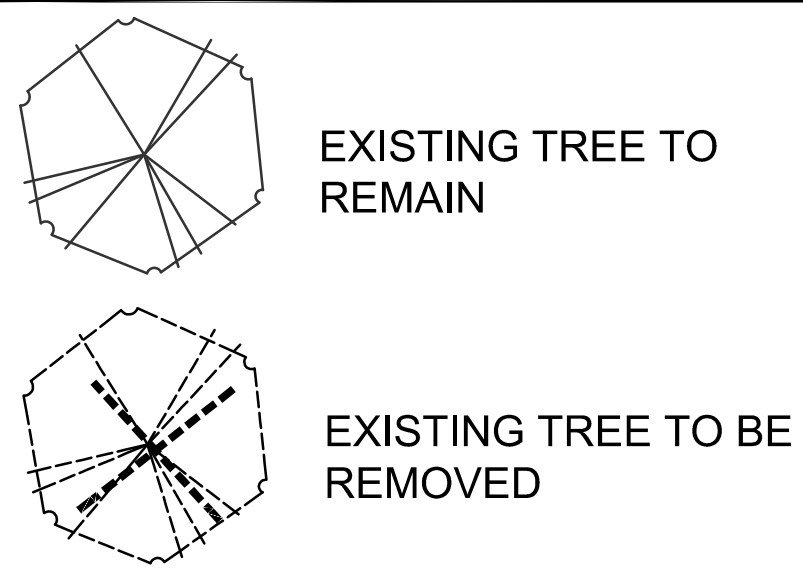

Digitally signed by  
Michael D Grosswirth  
DN: c=US, o=THOMAS  
ENGINEERING GROUP  
LLC,  
ou=A01410C0000017  
20E31831F0000EFAC,  
cn=Michael D  
Grosswirth  
Date: 2022.08.22  
09:04:39 -04'00'

Michael D  
Grosswirth

**PERMIT SET  
MUST BE ON JOBSITE AT ALL**

**NOTICE**  
**INSPECTION REQUIRED**  
24 HRS. PRIOR TO COMMENCING A  
WORK IN THE PUBLIC R/W CONTAINING  
THE BROWARD COUNTY HIGHWAY  
CONSTRUCTION AND ENGINEERING  
DIVISION AT 954-577-4600 FOR  
INSPECTION.

**NOTE:**  
APPROVAL OF THIS PLAN DOES NOT CONSTITUTE A PERMIT FOR CONSTRUCTION.

BE OBTAINED FROM THE BROWARD COUNTY HIGHWAY CONSTRUCTION AND ENGINEERING DIVISION PRIOR TO COMMENCING CONSTRUCTION IN THE PUBLIC RIGHT OF WAY.

ALL MATERIALS USED AND  
INSTALLATIONS WITHIN THE PUBLIC  
RIGHT OF WAY OR EASEMENTS SHALL  
IN ACCORDANCE WITH BROWARD COUNTY  
HIGHWAY CONSTRUCTION AND  
ENGINEERING DIVISION SPECIFICATION

BROWARD COUNTY HIGHWAY CONSTRUCTION AND  
ENGINEERING DIVISION☐ PLAN CONSISTENT  
WITH PLAT REQUIREMENTS

BY: \_\_\_\_\_ DATE: \_\_\_\_\_

DOES NOT INCLUDE APPROVAL  
OF PAVEMENT MARKING & SIGNS

NOTE: SEVERAL TREES SCHEDULED TO REMAIN MAY REQUIRE STRUCTURAL BRACING, CABLING AND CROWN REDUCTION TO IMPROVE STABILITY AND INTEGRITY OF THE TREE. WORK SHALL BE PERFORMED, IF NECESSARY, BY AN BOARD CERTIFIED MASTER ARBORIST.

NOTE: TREES SCHEDULED TO REMAIN WHICH EXIST  
ADJACENT TO INTERIOR DRIVE AISLES, SHALL BE ROOT  
PRUNED AS NEEDED UNDER THE SUPERVISION OF AN ISA  
CERTIFIED ARBORIST AND IN ACCORDANCE WITH DETAIL  
ON SHEET L-1.2