


- SILT FENCE**
- EROSION CONTROL GENERAL NOTES**
1. SILT FENCE AND TURBIDITY BARRIERS MUST REMAIN IN PLACE AND BE MAINTAINED AT ALL LOCATIONS SHOWN IN THE DRAWINGS UNTIL CONSTRUCTION IS COMPLETED AND SOILS ARE STABILIZED AND VEGETATION HAS BEEN.
  2. CPMTRACTOR SHALL SUBMIT SCHEDULE FOR THE INSTALLATION, INSPECTION AND MAINTENANCE THE EROSION CONTROLS FEATURES AS SHOWN IN THE DRAWINGS OR AS DIRECTED BY THE DESIGN ENGINEER. THE SCHEDULE SHALL SPECIFICALLY SHALL SPECIFICALLY INDICATE THE SEQUENCE OF CLEARING, EARTH WORK OPERATIONS, AND WHEN THE EROSION CONTROL FEATURE WILL BE INSTALLED, INSPECTED, AND MAINTAINED. IT SHALL ALSO INCLUDE METHODS TO PREVENT POLLUTION OF STREAM, LAKES, TIDAL WATERS, CANALS, AND IMPOUNDMENTS. ESTABLISHED.

ENGINEERING STANDARDS 2025				
REVISIONS		ENGINEERING DIVISION	SILT FENCE	
BY	DATE			
		CITY OF POMPANO BEACH	DATE: MAY 2022 DWG. NO. 509-1	
		SCALE: N.T.S.		

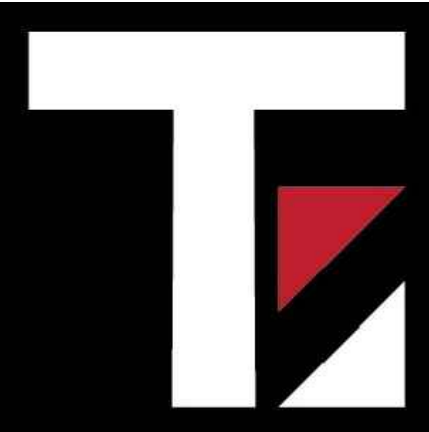

**Thompson Engineering & Consulting, Inc.**  
19304 NW 12th Street  
Pembroke Pines, FL 33029  
Florida Registry No. 33359  
(954) 232-2281  
thompson-ec.com

Date: 10/01/2025

This item has been digitally signed and sealed by Justin Thompson, PE, on the date adjacent to the seal.

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

**DEMISOL HOLDINGS, LLC**  
1550 NW 24TH AVENUE  
POMPANO BEACH, FL 33315  
CITY OF POMPANO BEACH BROWARD COUNTY

Project No.	25-015	
Date	09/10/2025	
Scale	As Shown	
Drawn By	UCS	
Checked By	JT	
Revisions		
No.	Description	Date

**STORM WATER POLLUTION & PROTECTION NOTES & DETAILS**

**DRC**

Sheet Number: **C107**  
PZ25- 12000031  
11/05/2025  
Sheet 7 of 12