
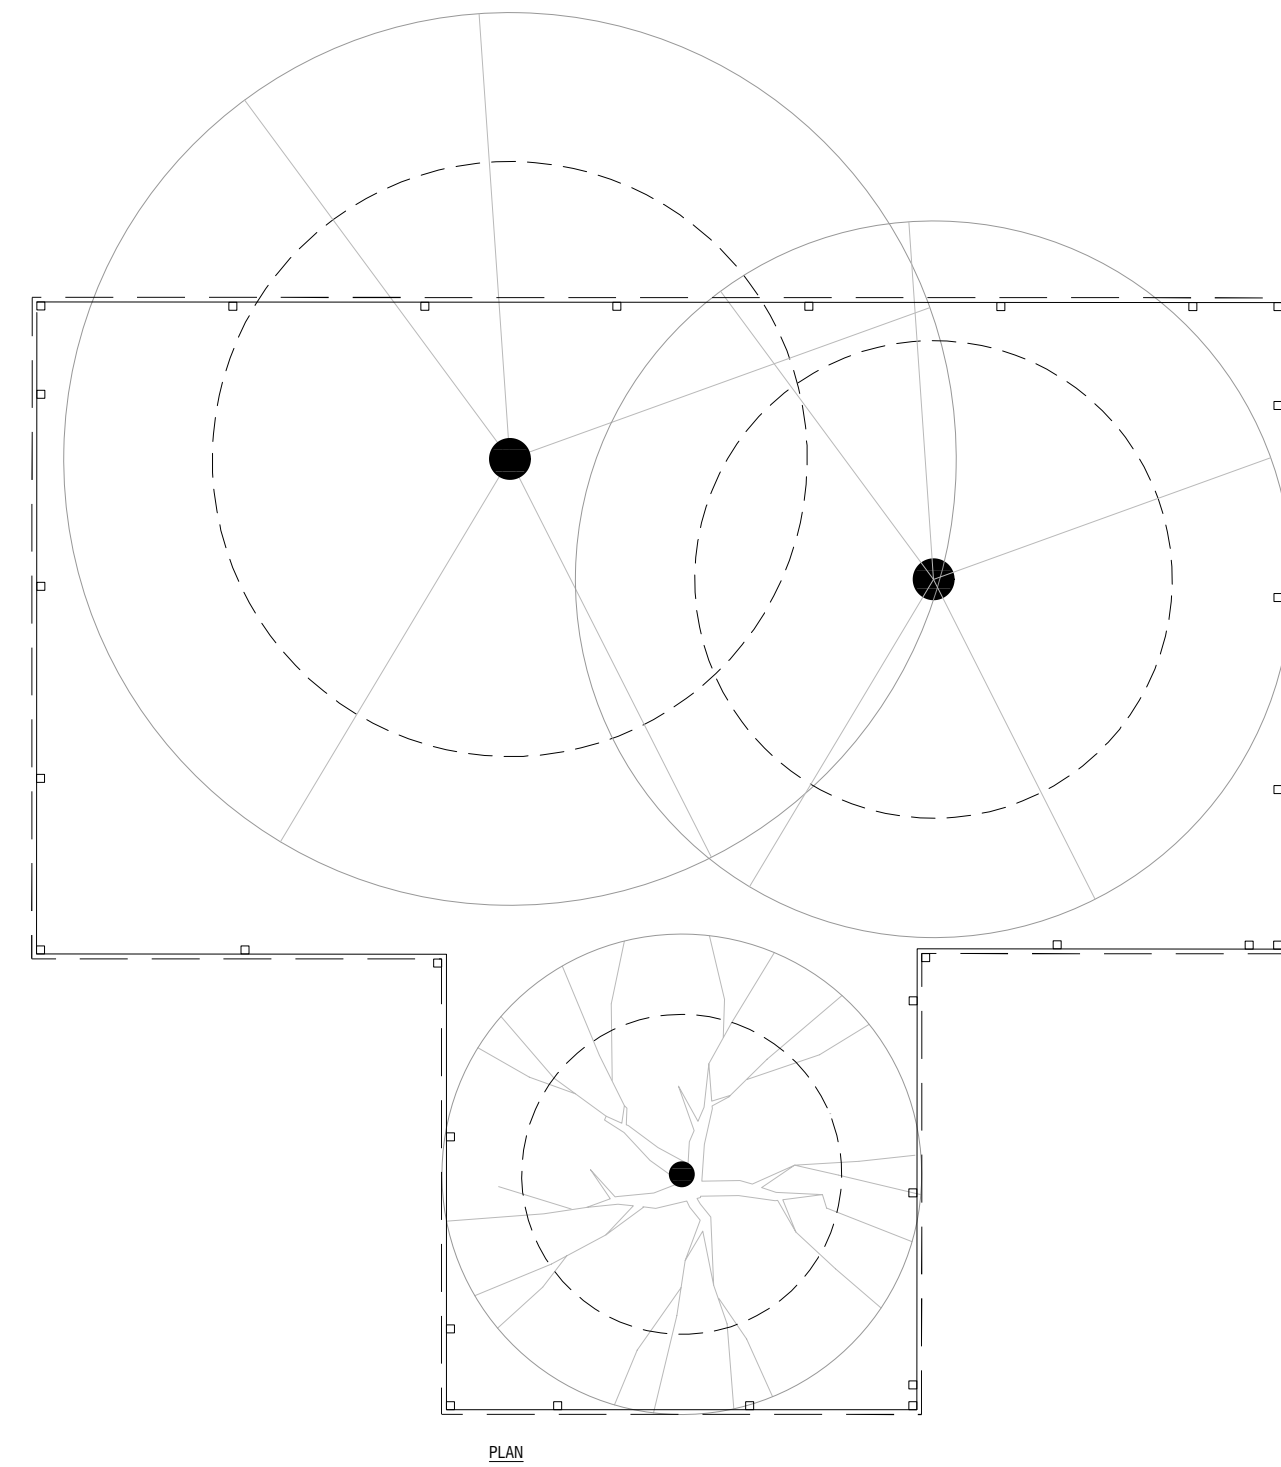


1. FINAL MATERIALS FOR CONSTRUCTION OF TREE PROTECTION FENCING MUST BE SUBMITTED FOR APPROVAL OF OWNER.
2. NO MATERIAL OR EQUIPMENT SHALL BE STORED OR STOCKPILED WITHIN THE AREA SURROUNDED BY TREE PROTECTION FENCING. AREA SHALL BE KEPT FREE OF TRASH/DEBRIS.
3. NO MIXING, CLEANING, OR DISPOSING OF LIQUIDS OR OTHER MATERIALS IN LANDSCAPE AREAS.
4. WHERE SOME EXCAVATE OR FILL HAS TO BE TEMPORARILY LOCATED NEAR A TREE PROTECTION FENCE, PLYWOOD MUST BE USED TO ENSURE NO MATERIAL ENTERS THE TREE PROTECTION AREA.
5. ALL SUPPORTS AND BRACING SHOULD BE OUTSIDE THE TREE PROTECTION AREA. ALL SUCH SUPPORTS SHOULD BE LOCATED TO MINIMIZE DAMAGING ROOTS.
6. NO CONSTRUCTION ACTIVITY, GRADE CHANGES, SURFACE TREATMENT OR EXCAVATIONS ARE PERMITTED WITHIN THE TREE PROTECTION AREA EXCEPT THOSE NOTED FOR SPECIAL (HAND/AIR SPADE/OR SIM.) EXCAVATION. REFER TO SPECIFICATIONS.
7. COORDINATE ALL TREE PROTECTION FENCING W/ CONSTRUCTION HOARDING/FENCE LOCATIONS AND POINTS OF ACCESS.
8. ALL TREE PROTECTION TO BE CONSTRUCTED AND MAINTAINED TIGHT, LEVEL, AND PLUMB THROUGHOUT CONSTRUCTION.
9. REFER TO LAYOUT PLAN FOR EXTENTS OF ROOT PRUNING.
10. INSTALL SEDIMENT BARRIER TIE 18" ABOVE GRADE AT HARDSCAPE.
11. TREE PROTECTION TO BE COORDINATED WITH CONSTRUCTION LOGISTICS PLAN AND FENCING.

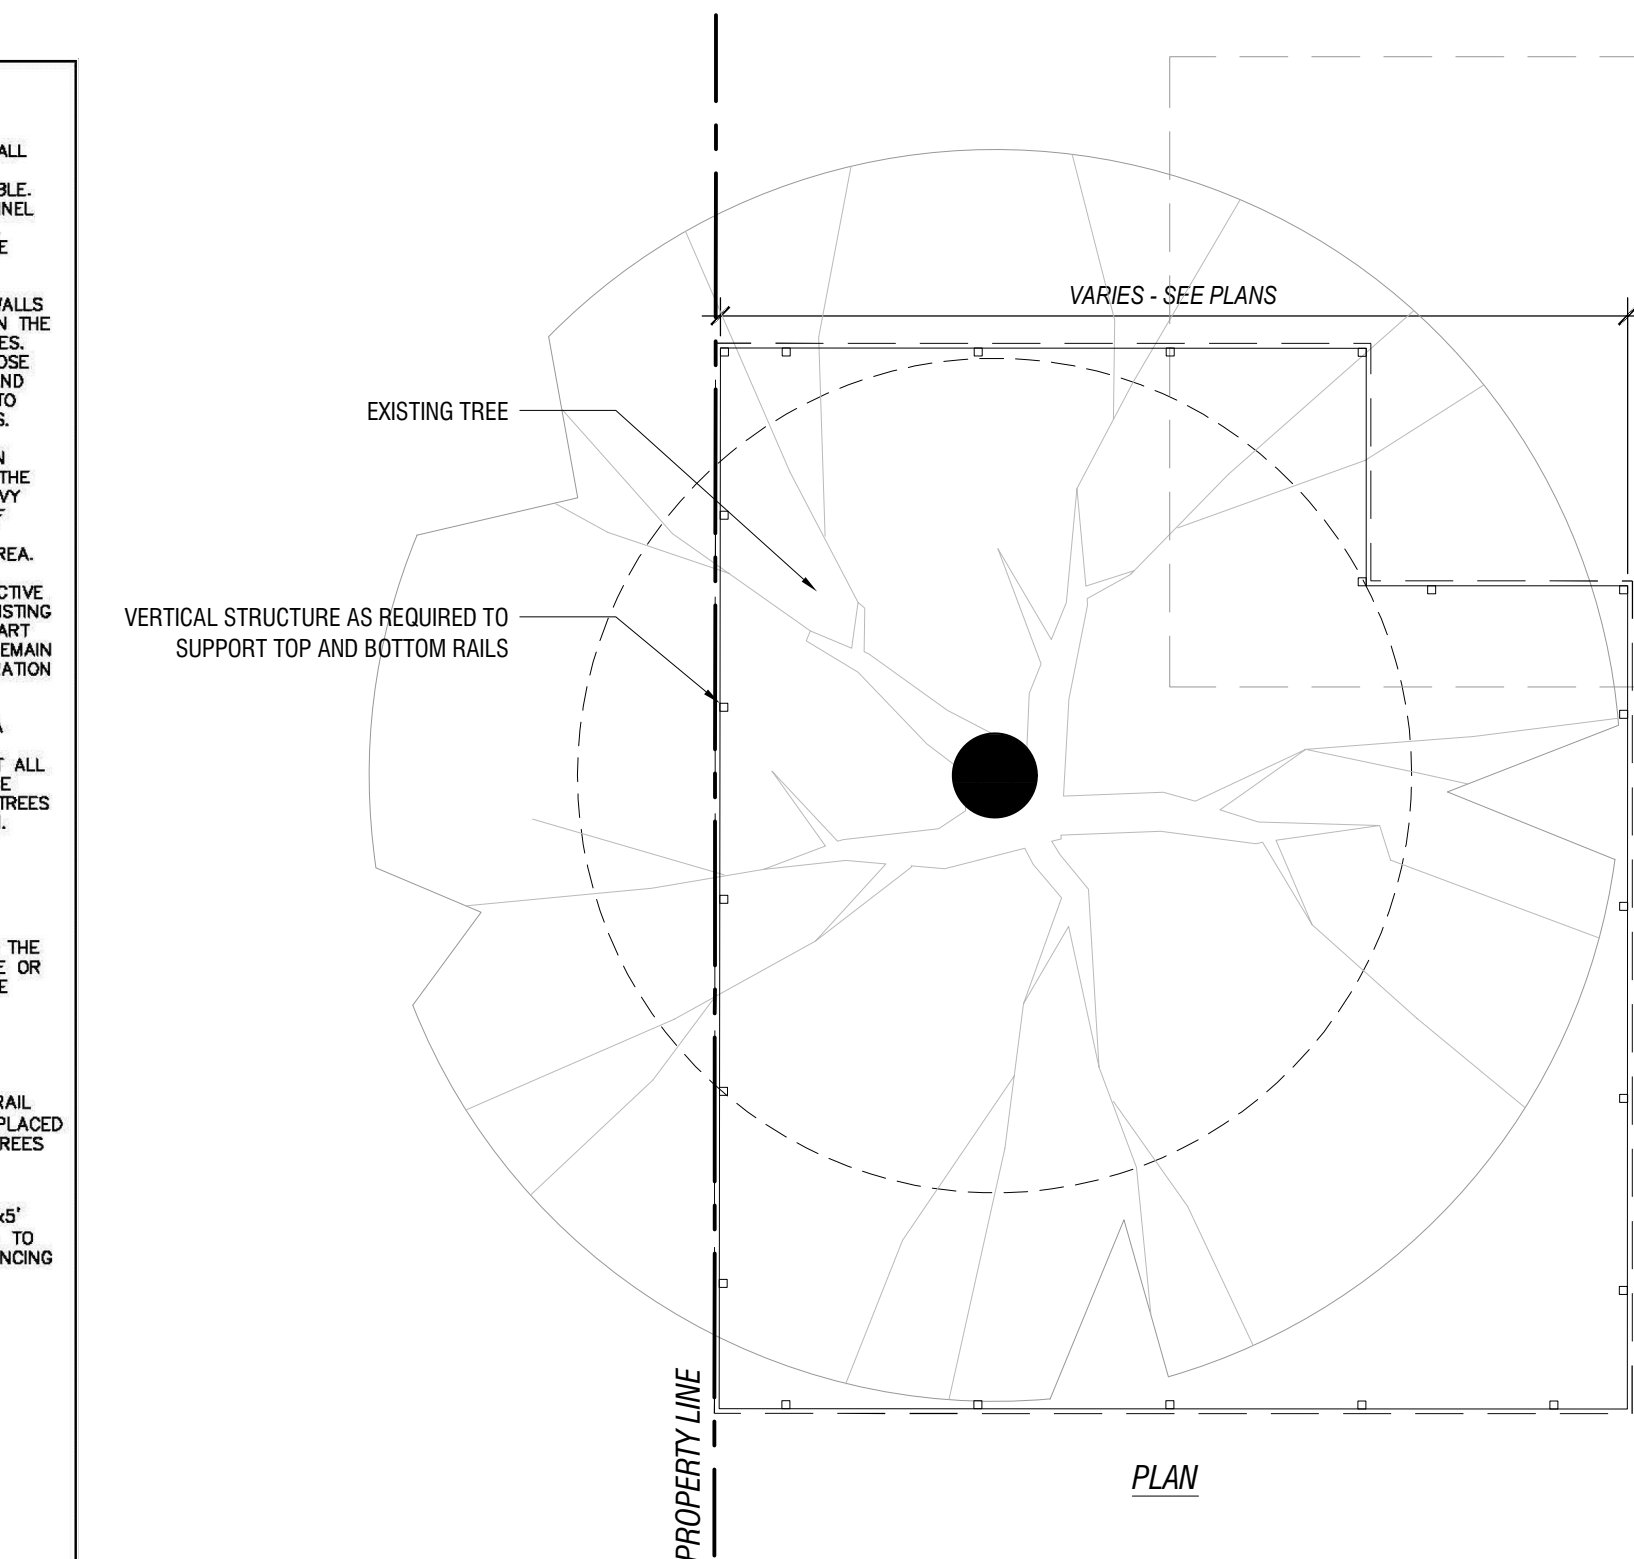

All drawing and written materials herein constitute original work of the architect and may only be duplicated with their written consent.

DRC
PZ22-12000012
12/18/2024