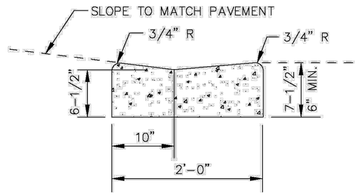


DROP CURB




TYPE "F" CURB & GUTTER

## CONCRETE CURB AND GUTTER DETAIL

ENGINEERING STANDARDS 2025

| REVISIONS BY | DATE | ENGINEERING DIVISION CITY OF POMPANO BEACH | CONCRETE CURB AND GUTTER | DATE: MAY 2022 DWG. NO. 300-1 |
|---|---|---|---|---|
| S.S. | 07-2016 | SCALE: N.T.S. | | |

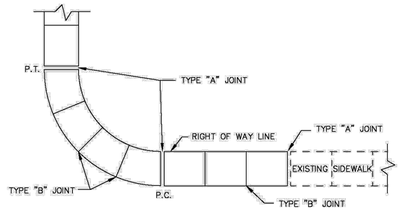


PLAN

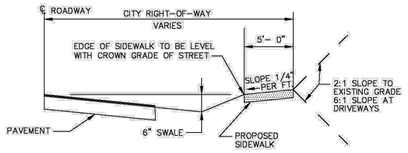


TYPICAL SIDEWALK SECTION

## SIDEWALK DETAILS

ENGINEERING STANDARDS 2025

| REVISIONS BY | DATE | ENGINEERING DIVISION CITY OF POMPANO BEACH | SIDEWALK DETAILS | DATE: JUNE 2022 DWG. NO. 301-1 |
|---|---|---|---|---|
| | | SCALE: N.T.S. | | |

| TABLE OF SIDEWALK JOINTS | |
|---|---|
| TYPE | LOCATION |
| "A" | JOINT SHALL BE PLACED AT P.C. AND P.T. OF CURVES, JUNCTION OF EXISTING SIDEWALKS, EVERY 60' ON NEW SIDEWALKS AND WHERE SIDEWALKS ABUT CONCRETE CURBS, DRIVEWAYS AND SIMILAR STRUCTURES. |
| "B" | JOINT SHALL BE PLACED 5'-0" CENTER |
| "C" | JOINT SHALL BE PLACED AT 20' INTERVALS |




TYPE "A" JOINT




TYPE "B" JOINT




TYPE "C" JOINT

NOTE: SIDEWALK SHALL BE 4" THICK EXCEPT IN DRIVEWAYS WHERE THE THICKNESS SHALL BE 6".

## SIDEWALK DETAILS

ENGINEERING STANDARDS 2025

| REVISIONS BY | DATE | ENGINEERING DIVISION CITY OF POMPANO BEACH | SIDEWALK DETAILS | DATE: JUNE 2022 DWG. NO. 301-2 |
|---|---|---|---|---|
| | | SCALE: N.T.S. | | |

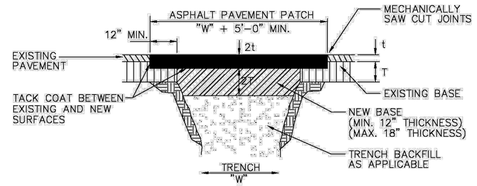


PERPENDICULAR ROAD CROSSINGS (TYPE III)

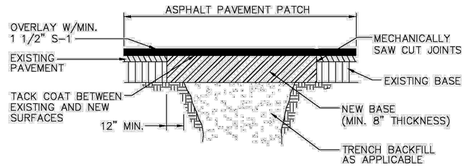


STANDARD PARALLEL ROAD RESTORATION (TYPE IV)

## SURFACE RESTORATION

ENGINEERING STANDARDS 2025

| REVISIONS BY | DATE | ENGINEERING DIVISION CITY OF POMPANO BEACH | SURFACE RESTORATION | DATE: MAY 2022 DWG. NO. 306-2 |
|---|---|---|---|---|
| | | SCALE: N.T.S. | | |

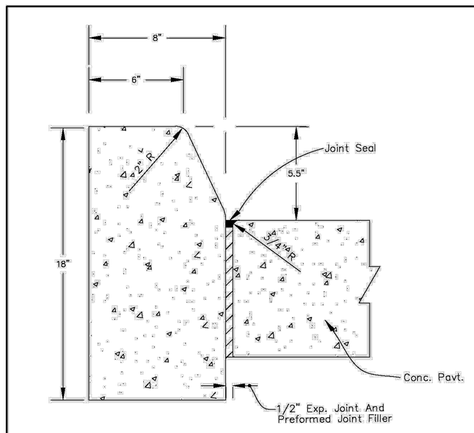


TYPE "D" CURB

NOTE

FOR USE ADJACENT TO CONCRETE OR FLEXIBLE PAVEMENT, CONCRETE SHOWN. EXPANSION JOINT, PREFORMED JOINT FILLER AND JOINT SEAL ARE REQUIRED BETWEEN CURBS AND CONCRETE PAVEMENT ONLY.

## CONCRETE CURB DETAIL

ENGINEERING STANDARDS 2025

| REVISIONS BY | DATE | ENGINEERING DIVISION CITY OF POMPANO BEACH | CONCRETE CURB | DATE: MAY 2022 DWG. NO. 300-2 |
|---|---|---|---|---|
| S.S. | 01-2014 | | | |
| S.S. | 08-2015 | | | |
| S.S. | 07-2016 | SCALE: N.T.S. | | |

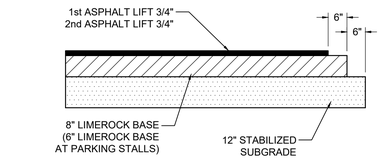


ASPHALTIC CONCRETE VEHICULAR:
FIRST LIFT - 3/4" FDOT - SP 9.5 (FINE MIX). SECOND (FINAL) LIFT - 3/4" FDOT - SP 9.5 (FINE MIX). ASPHALT SURFACE COURSE SHALL CONFORM TO THE REQUIREMENTS OF FDOT STANDARDS SPECIFICATIONS SECTIONS 330 AND 334. SECOND LIFT OF ASPHALT SHALL NOT BE PLACED UNTIL FINAL LANDSCAPE/HARDSCAPE HAS BEEN INSTALLED.

PRIME AND TACK COAT:
LIMEROCK BASE COURSE SHALL CONFORM TO THE REQUIREMENTS OF FDOT STANDARDS SPECIFICATIONS SECTION 300.
APPLICATION RATES:
PRIME COAT - 0.10 GALLONS PER SQ. YD.
TACK COAT - 0.08 GALLONS PER SQ. YD.

BASE:
8"/ 6" LIMEROCK BASE COMPACTED TO 98% OF MAXIMUM DENSITY (AASHTO T-180), LIMEROCK BASE TO CONFORM WITH THE REQUIREMENTS OF FDOT SPECIFICATIONS SECTIONS 200 AND 911.

SUBGRADE:
12" STABILIZED SUBGRADE COMPACTED TO 98% OF MAXIMUM DENSITY (AASHTO T-180); MINIMUM LBR = 40.

## 1 ASPHALT PAVEMENT DETAIL

NOT TO SCALE

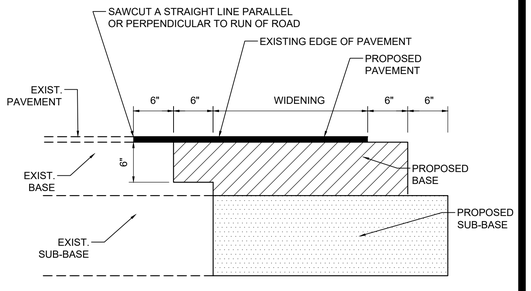


## 7 SAWCUT WIDENING DETAIL

NOT TO SCALE

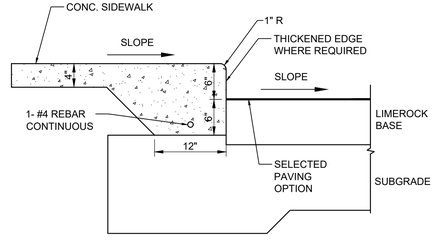


## 8 THICKENED EDGE SIDEWALK DETAIL

NOT TO SCALE

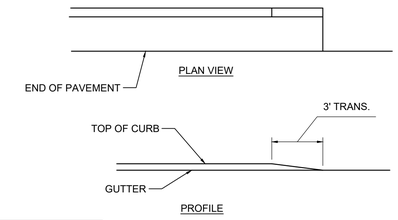


NOTE:
ALL CURB & GUTTER FLARED AND STRAIGHT ENDS SHALL BE IN ACCORDANCE WITH THE STANDARD REQUIREMENTS OF FDOT INDEX 520-001.

STRAIGHT END

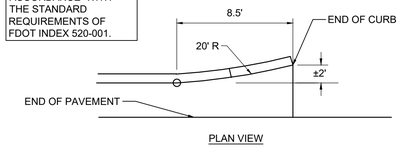





FLARED END

## 10 CURB & GUTTER FLARED AND STRAIGHT ENDS

NOT TO SCALE


DRC KEITH
PZ26-12000001
05/20/2026
2152 East Atlantic Blvd.
Pompano Beach, FL 33060
PH: (954) 788-3400
Florida Engineering Business License: CA7928
Florida Surveyor and Mapper Business License: LB6860
Florida Landscape Architecture Business License: LC26000457


REVISIONS

| NO. | DESCRIPTION | DATE |
|---|---|---|

**PRELIMINARY PLAN NOT FOR CONSTRUCTION**

THESE PLANS ARE NOT FULLY PERMITTED AND ARE SUBJECT TO REVISIONS MADE DURING THE PERMITTING PROCESS.

RESPONSIBILITY FOR THE USE OF THESE PLANS PRIOR TO OBTAINING PERMITS FROM ALL AGENCIES HAVING JURISDICTION OVER THE PROJECT WILL FALL SOLELY UPON THE USER.

| | |
|---|---|
| ISSUE DATE: | 03/11/2026 |
| DESIGNED BY: | CA |
| DRAWN BY: | BN |
| CHECKED BY: | CA |
| BID-CONTRACT: | |

This item has been digitally signed and sealed by CHRISTOPHER T. ANDREONI, P.E. on the date adjacent to the seal.

CHRISTOPHER T. ANDREONI LICENSE No. 84184 STATE OF FLORIDA PROFESSIONAL ENGINEER

Signature must be verified on any electronic copies.

2026.04.10 16:12:59-04'00'

CHRISTOPHER T. ANDREONI, P.E.
FLORIDA REG. NO. 84184
(FOR THE FIRM)

CLIENT

**RP POMPANO LLC**

PROJECT

**POMPANO BEACH CITY HALL & PARKING DECK**

SHEET TITLE

**PAVING, GRADING, AND DRAINAGE DETAILS**

| | |
|---|---|
| SHEET NUMBER | CP-501 |
| PROJECT NUMBER | 15083.00 |

STATUS: PRELIMINARY

Plotted by: delias On 4/9/2026 3:10 PM

Drawing name: H:\15983.00 - Downtown Pompano - RP Development LLC\Engineering\Cadd\Phase I (Infrastructure)\15083.00-CP-5XX-PH1.dwg