



DRC

PZ23-12000009


10/02/2024

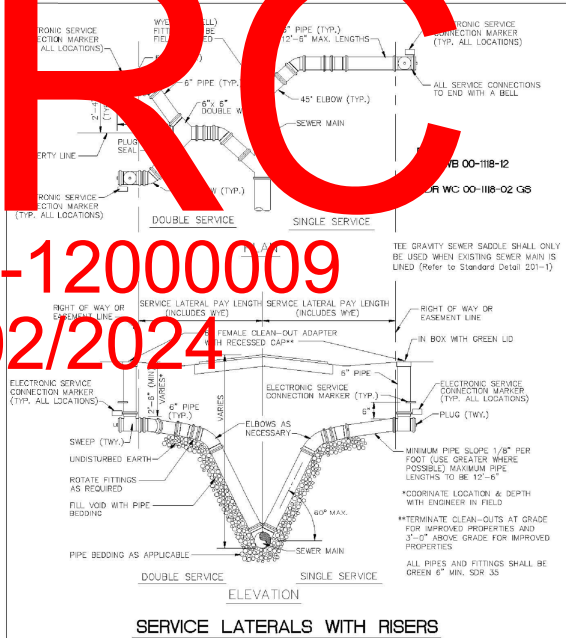


ENGINEERING STANDARDS 2022			
REVISIONS		ENGINEERING DIVISION	
BY	DATE	CITY OF POMPAÑO BEACH	
T.W.	11-2007	N.T.S.	
S.S.	01/27/12	DATE: JUNE 2022	
S.S.	07/10/12	DWG. NO.	
S.S.	02/05/16	200-1	

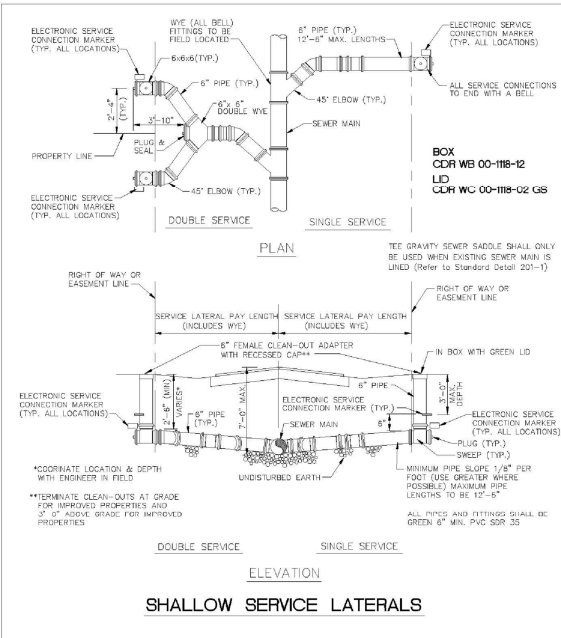

ENGINEERING STANDARDS 2022			
REVISIONS		ENGINEERING DIVISION	
BY	DATE	CITY OF POMPAÑO BEACH	
T.W.	11-2007	N.T.S.	
S.S.	01/27/12	DATE: JUNE 2022	
S.S.	07/10/12	DWG. NO.	
S.S.	02/05/16	200-2	

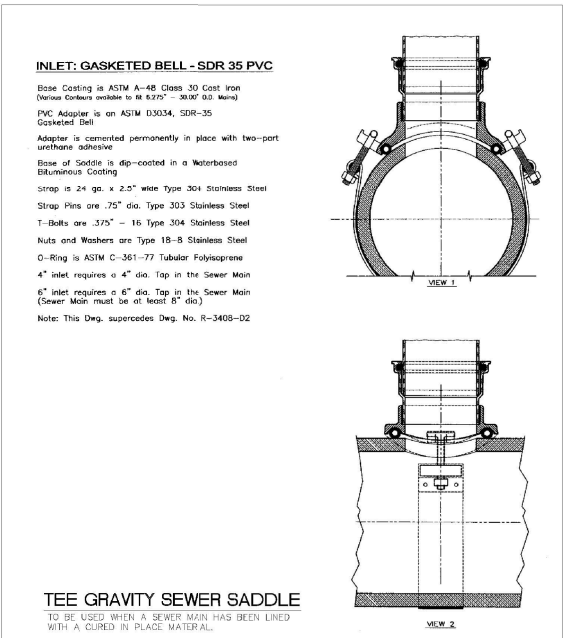

ENGINEERING STANDARDS 2022			
REVISIONS		ENGINEERING DIVISION	
BY	DATE	CITY OF POMPAÑO BEACH	
T.W.	11-2007	N.T.S.	
S.S.	01/27/12	DATE: MAY 2022	
S.S.	07/10/12	DWG. NO.	
S.S.	02/05/16	201-1	

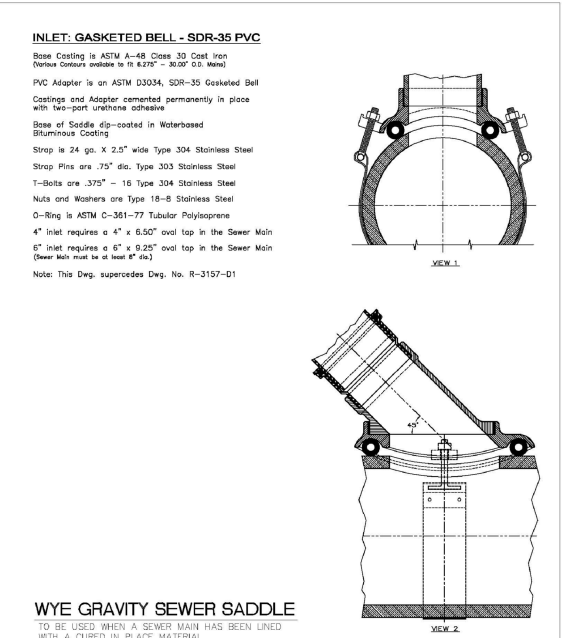

ENGINEERING STANDARDS 2022			
REVISIONS		ENGINEERING DIVISION	
BY	DATE	CITY OF POMPAÑO BEACH	
T.W.	11-2007	N.T.S.	
S.S.	01/27/12	DATE: MAY 2022	
S.S.	07/10/12	DWG. NO.	
S.S.	02/05/16	201-2	

### Adjustable Repair Coupling




#### NOTES

- Synthetic rubber gasket is strong, durable and resilient to ultraviolet rays, ozone, fungus growth and normal sewer gases. More pliable and easier to install in cold weather applications than an Elastomeric PVC gasket.
- Sealing "O" rings under the clamp prevent pipe slippage and create a more positive seal.
- More transition couplings for dissimilar pipe types and sizes are comprised of a one-piece transition gasket, eliminating the use of bushings that are difficult to install and easy to lose on the job site.
- Surgical Grade 316 stainless steel Nut & Bolt clamps are corrosion resistant, providing outstanding protection in severe environments such as marine applications, poorly aerated or moist soils, contaminated ground conditions (particularly industrial fill sites) and where the ground water contains chloride, sulfates or bicarbonates. Increased band tension of the Nut & Bolt clamp ensures a leak-proof, root-proof seal that is resistant to both infiltration and exfiltration.
- Series 300 stainless steel shear band is the heaviest in the industry, over 33% thicker than the competition.
- Broadest range of couplings on the market in sizes ranging from 1 1/2" to 96" in diameter. Used for the alteration and rehabilitation of gravity-flow sewage pipes made of clay, cast iron, plastic, concrete, ductile iron, asbestos cement, fiber cement and truss pipe.


**Specification:**  
Furnish and install stainless steel shielded sewer couplings as manufactured by Mission Rubber Company Coupling to meet ASTM C 1173. Gasket to meet ASTM C 425 Table 2, to be rubber and be environmentally certified. Series 300 stainless steel shear band with a minimum thickness of .012", surgical grade 316 stainless steel clamps with nut & bolt take up, shear ring and clamps to meet all requirements of ASTM A 240. All stainless steel parts and clamping mechanisms to be manufactured in the U.S.A. Transitional sizes to utilize a one piece gasket.

#### ADJUSTABLE REPAIR COUPLING PVC/CLAY NOTES


ENGINEERING STANDARDS 2022			
REVISIONS		ENGINEERING DIVISION	
BY	DATE	CITY OF POMPAÑO BEACH	
T.W.	11-2007	N.T.S.	
S.S.	01/27/12	DATE: MAY 2022	
S.S.	07/10/12	DWG. NO.	
S.S.	02/05/16	202-1	



ENGINEERING STANDARDS 2022			
REVISIONS		ENGINEERING DIVISION	
BY	DATE	CITY OF POMPAÑO BEACH	
T.W.	11-2007	N.T.S.	
S.S.	01/27/12	DATE: JUNE 2022	
S.S.	07/10/12	DWG. NO.	
S.S.	02/05/16	203-1	



ENGINEERING STANDARDS 2022			
REVISIONS		ENGINEERING DIVISION	
BY	DATE	CITY OF POMPAÑO BEACH	
T.W.	11-2007	N.T.S.	
S.S.	01/27/12	DATE: JUNE 2022	
S.S.	07/10/12	DWG. NO.	
S.S.	02/05/16	203-2	



Digitally signed by Bealinda M Pell  
DN: c=US, o=Unaffiliated, dnQualifier=A01410C0000018E2E86C2580002F48A, cn=Bealinda M Pell  
Date: 2024.08.20 16:09:07 -04'00'

