



1A DIRECTIONAL ARROW  
C-4.0 NOT TO SCALE

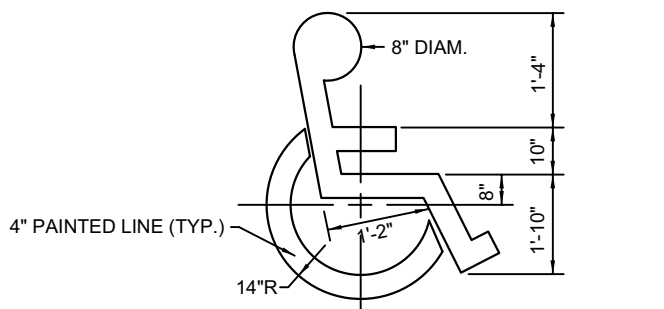

1B ACCESSIBILITY SYMBOL  
C-4.0 NOT TO SCALE

- NOTES:
1. GENERAL CONTRACTOR SHALL REFER TO PARKING LOT STRIPING SPECIFICATIONS (SEE DETAIL 5/C-4.0).
  2. CONTRACTOR SHALL USE WHITE REFLECTIVE PAINT ON ASPHALT & YELLOW REFLECTIVE PAINT ON CONCRETE, UNLESS UPON VERIFICATION BY THE GENERAL CONTRACTOR IT IS DETERMINED THAT LOCAL, STATE, OR ADA CODES DIFFER, IN WHICH CASE THESE CODES SHALL GOVERN.

1 PAVEMENT MARKINGS - 1  
C-4.0 NOT TO SCALE

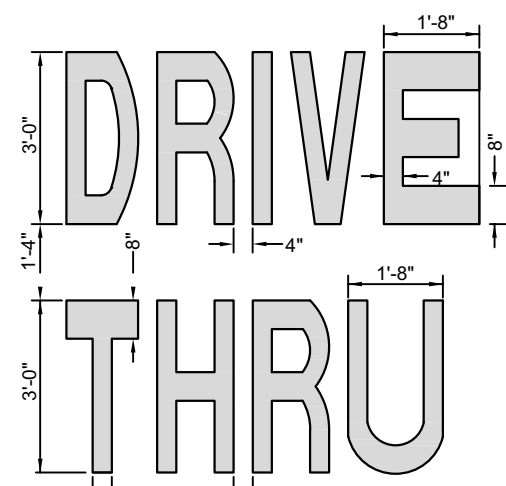


2A DRIVE-THRU  
C-4.0 NOT TO SCALE


- NOTES:
1. GENERAL CONTRACTOR SHALL REFER TO PARKING LOT STRIPING SPECIFICATIONS.
  2. CONTRACTOR SHALL USE WHITE REFLECTIVE PAINT ON ASPHALT & YELLOW REFLECTIVE PAINT ON CONCRETE, UNLESS UPON VERIFICATION BY THE GENERAL CONTRACTOR IT IS DETERMINED THAT LOCAL, STATE, OR ADA CODES DIFFER, IN WHICH CASE THESE CODES SHALL GOVERN.

NOTE:  
IF STOP SIGN IS PROPOSED, "STOP" LETTERING GRAPHIC IS NOT REQUIRED.

2 PAVEMENT MARKINGS - 2  
C-4.0 NOT TO SCALE

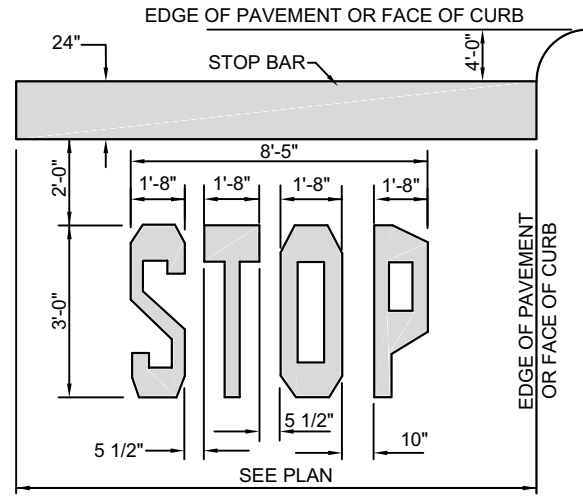


2B STOP BAR  
C-4.0 NOT TO SCALE

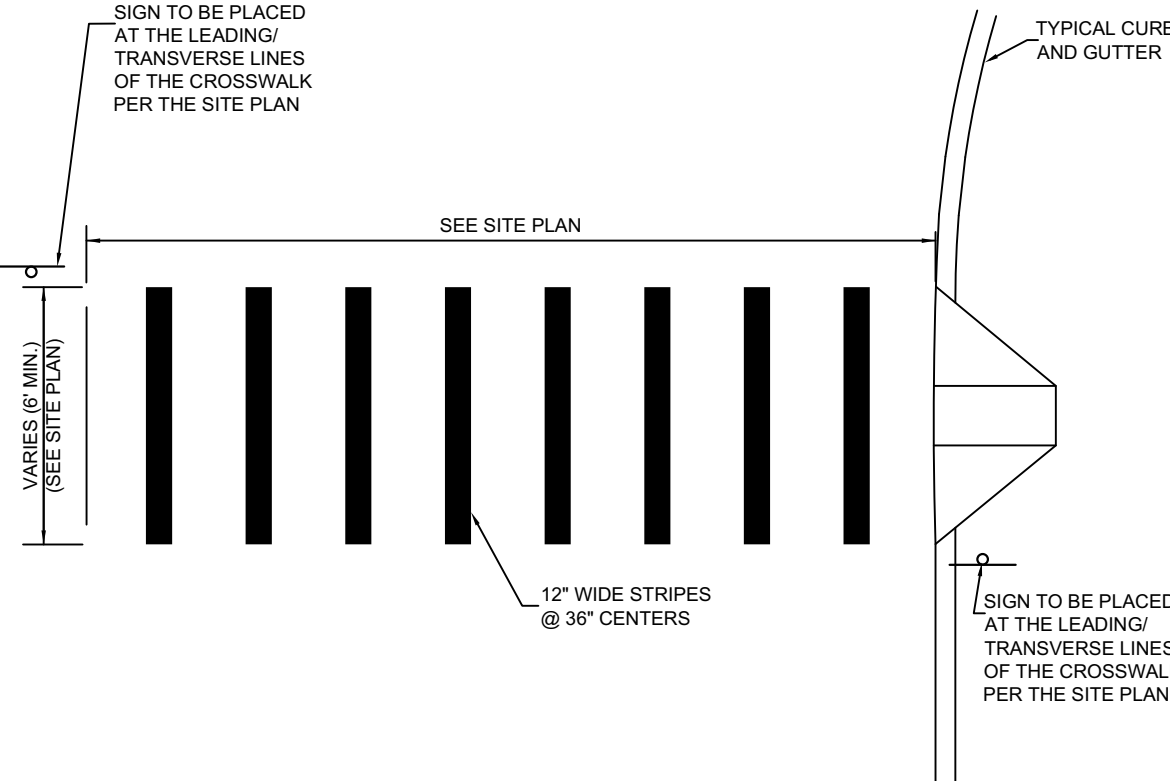

- NOTES:
1. GENERAL CONTRACTOR SHALL REFER TO PARKING LOT STRIPING SPECIFICATIONS (SEE DETAIL 5/C-4.0).
  2. CONTRACTOR SHALL USE WHITE REFLECTIVE PAINT ON ASPHALT & YELLOW REFLECTIVE PAINT ON CONCRETE.


3 CROSSWALK MARKINGS  
C-4.0 NOT TO SCALE

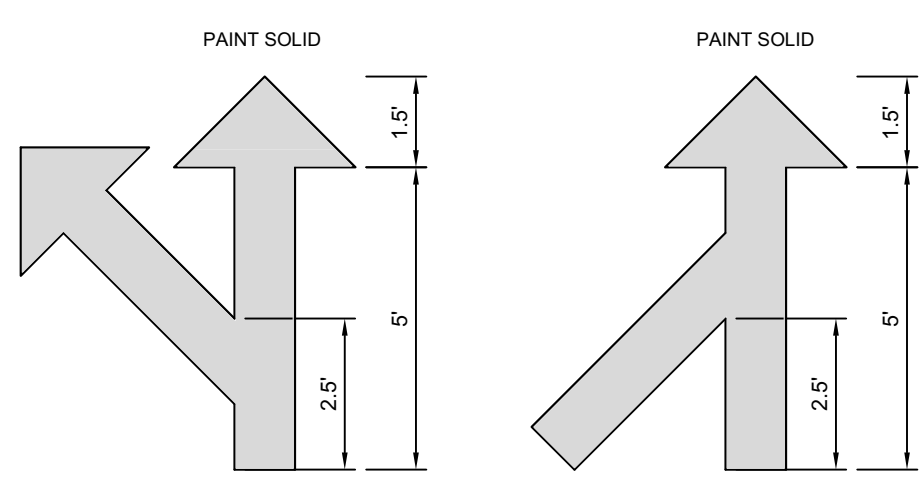

MULTI-LANE SPLIT  
MULTI-LANE MERGE


- NOTES:
1. GENERAL CONTRACTOR SHALL REFER TO PARKING LOT STRIPING SPECIFICATIONS (SEE DETAIL 5/C-4.0).
  2. CONTRACTOR SHALL USE WHITE REFLECTIVE PAINT ON ASPHALT & YELLOW REFLECTIVE PAINT ON CONCRETE.

4 MULTI-LANE DIRECTIONAL GRAPHICS  
C-4.0 NOT TO SCALE

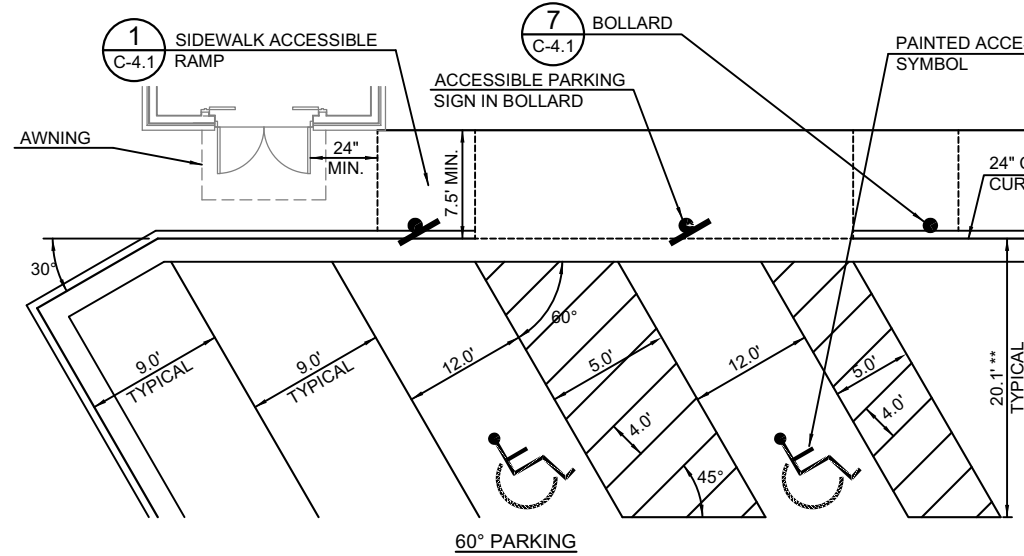

- NOTES:
1. ACCESSIBLE PARKING AND ACCESSIBLE AISLES SHALL NOT EXCEED 1.5% IN SLOPE IN ANY DIRECTION. IF ONLY ONE ACCESSIBLE AISLE IS INSTALLED, IT IS TO BE A VAN SIZE.
  2. PARKING STALL DIMENSIONING SHALL BE IN ACCORDANCE WITH APPLICABLE GOVERNING AUTHORITY'S AND ADA STANDARDS. SEE SITE PLAN FOR COMPLETE STRIPING LAYOUT.
  3. GENERAL CONTRACTOR SHALL REFER TO CHICK-FIL-A PARKING LOT STRIPING SPECIFICATIONS, THIS DETAIL.
  4. CONTRACTOR SHALL USE 4" WIDE WHITE REFLECTIVE PAINT FOR STRIPING ON ASPHALT PARKING LOTS.
  5. CONTRACTOR SHALL USE 4" WIDE YELLOW REFLECTIVE PAINT FOR STRIPING ON CONCRETE PARKING LOTS.
  6. ACCESSIBLE PARKING AND ACCESSIBLE AISLE STRIPING COLOR SHALL BE IN ACCORDANCE WITH APPLICABLE GOVERNING AUTHORITY REQUIREMENTS.
  7. NO WHEEL STOPS TO BE INSTALLED WHEN PARKING IS ADJACENT TO SIDEWALK.
  8. ADA SIGNS IN BOLLARDS AND BOLLARDS SHALL BE INSTALLED WHEN PARKING IS ADJACENT TO FLUSH CURB OR A RAMP.
  9. ALL DIMENSIONS ARE TO CENTER OF STRIPE UNLESS OTHERWISE NOTED.
  10. STRIPING IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR.


5 PARKING STALL LAYOUT AND STRIPING  
C-4.0 NOT TO SCALE

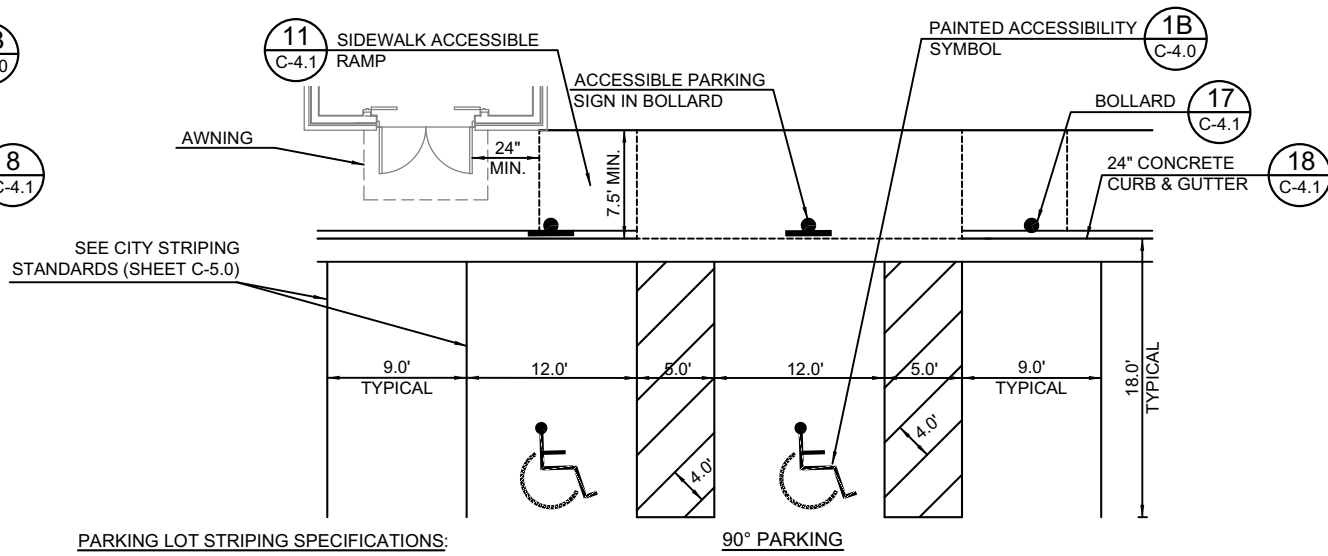


PARKING LOT STRIPING SPECIFICATIONS:

- STANDARDS:
1. ALWAYS FOLLOW ALL APPLICABLE GOVERNING AUTHORITY'S STANDARDS.
  2. SURFACES SHOULD BE CLEAN, DRY, AND FREE FROM LOOSE OR PEELING PAINT. REMOVE ALL OIL, DUST, GREASE, DIRT, AND OTHER FOREIGN MATERIAL TO ENSURE ADEQUATE ADHESION. DO NOT APPLY WHEN AIR OR SURFACE TEMPERATURES ARE BELOW 40°F.
  3. APPLY SHERWIN-WILLIAMS SETFAST PREMIUM ALKVD ZONE MARKING PAINT A300 WHITE OR A303 YELLOW USING EITHER AIRLESS OR CONVENTIONAL LINE STRIPING EQUIPMENT. USE THE FOLLOWING SETTINGS AS A GUIDE-ACTUAL SETTINGS DEPEND ON ATMOSPHERIC CONDITIONS AT THE TIME OF APPLICATION:
- |                        | AIRLESS   | CONVENTIONAL                                      |
|------------------------|---|---|
| • PRESSURE             | 1800-2700 PSI                                     |   |
| • HOSE                 | 1/2"-3/4" ID                                      |   |
| • TIP                  | 0.015"-0.017"                                     |   |
| • FILTER               | 60 MESH   |   |
| • REDUCTION            | ONLY IF NECESSARY, UP TO 1PT/GAL VMMP NAPTHA R1K3 |   |
| • GUN                  |   | BLINKS 21 (BLEEDER) OR EQUIVALENT #08             |
| • AIR NOZZLE           |   | INTERNAL MIX, #709                                |
| • ATOMIZATION PRESSURE |   | 45-80 PSI   |
| • FLUID PRESSURE       |   | 40-70 PSI   |
| • REDUCTION            |   | ONLY IF NECESSARY, UP TO 1PT/GAL VMMP NAPTHA R1K3 |
- SHERWIN WILLIAMS, H&C SHARK GRIP SLIP RESISTANT ADDITIVE TO BE MEASURED AND ADDED TO ALL PAINT PER MANUFACTURER'S WRITTEN SPECIFICATIONS. MIX THOROUGHLY PER MANUFACTURER'S RECOMMENDATIONS SO THAT NO CLUMPING IS APPARENT AND UNTIL EVEN DISTRIBUTION IS ACHIEVED. MAINTAIN EVEN DISTRIBUTION OF ADDITIVE IN PAINT THROUGHOUT THE APPLICATION PROCESS.
- MIX PAINT THOROUGHLY BY BOXING, STIRRING, OR POWER AGITATION BEFORE USE. APPLY AT 15 MILS. WET TO ACHIEVE A SPREAD RATE OF 4.0-5.0 LINEAL FEET OF STANDARD 4" STRIPE PER GALLON. APPLIED AT THIS RATE AT 70 DEGREES F AND 50% RELATIVE HUMIDITY, PAINT WILL DRY WITH NO TRAFFIC PICKUP AFTER 20 MINUTES.
- GENERAL CONTRACTOR TO RE-STRIPES THE LOT 45 DAYS AFTER OPENING.

9 CURB RAMP w/ FLARED SIDES  
C-4.0 NOT TO SCALE

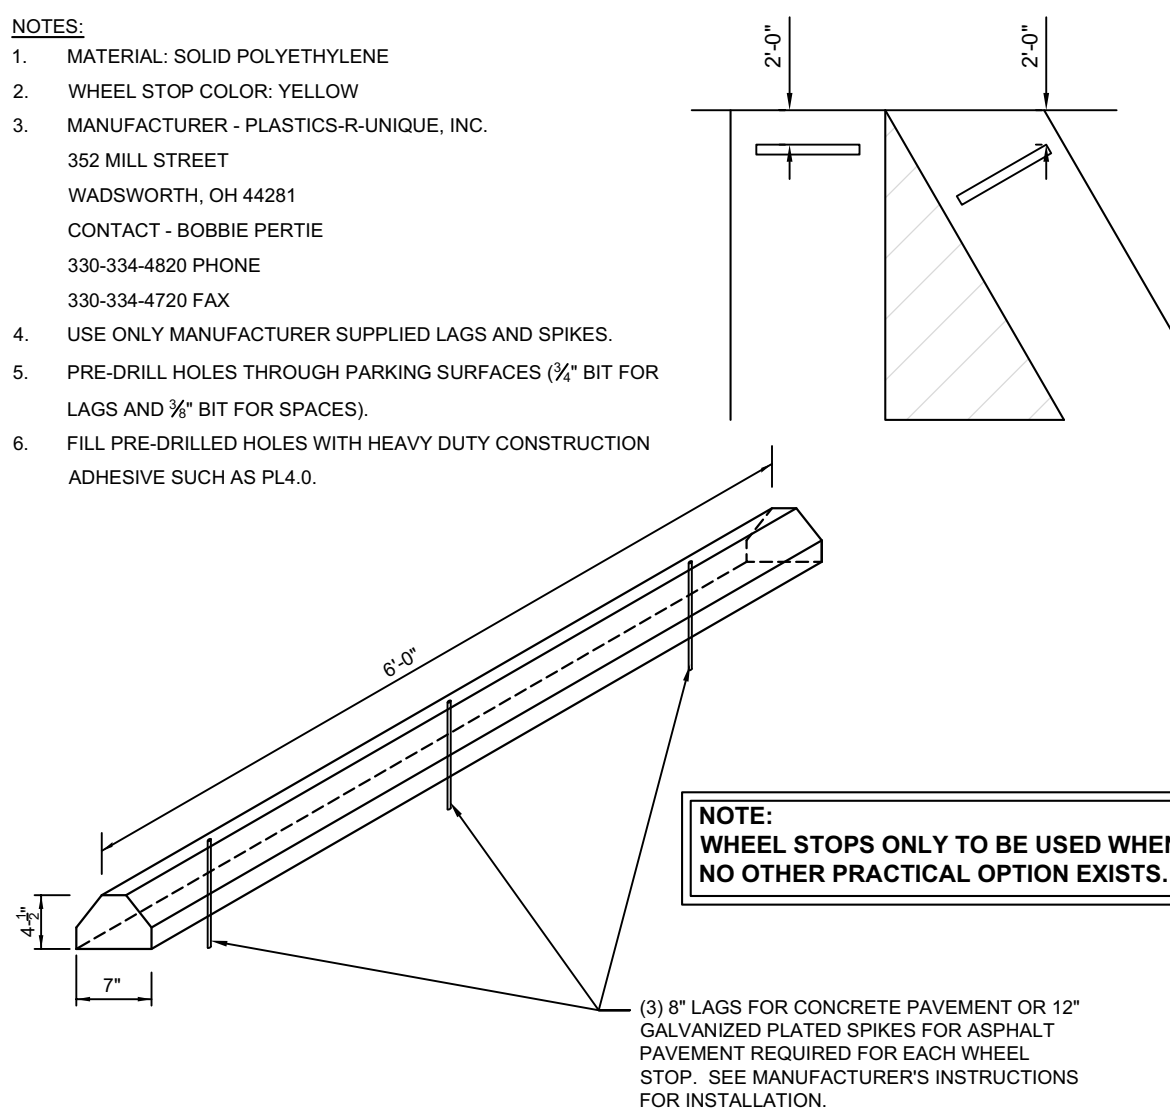


6 SOLID PLASTIC WHEEL STOP  
C-4.0 NOT TO SCALE

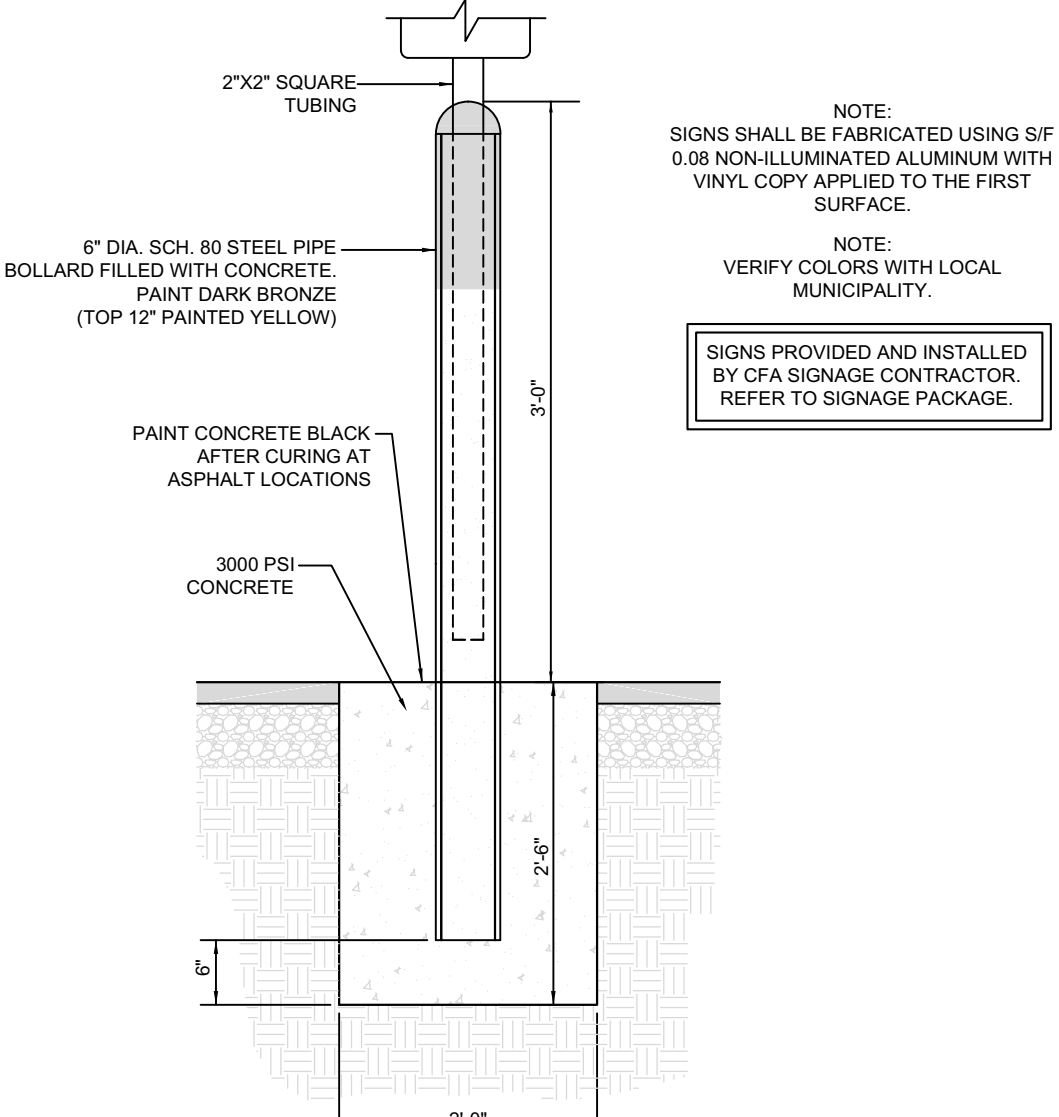


7 BOLLARD MOUNTED SIGN  
C-4.0 NOT TO SCALE

CIVIL TO VERIFY RAMP REQUIREMENTS BY STATE.

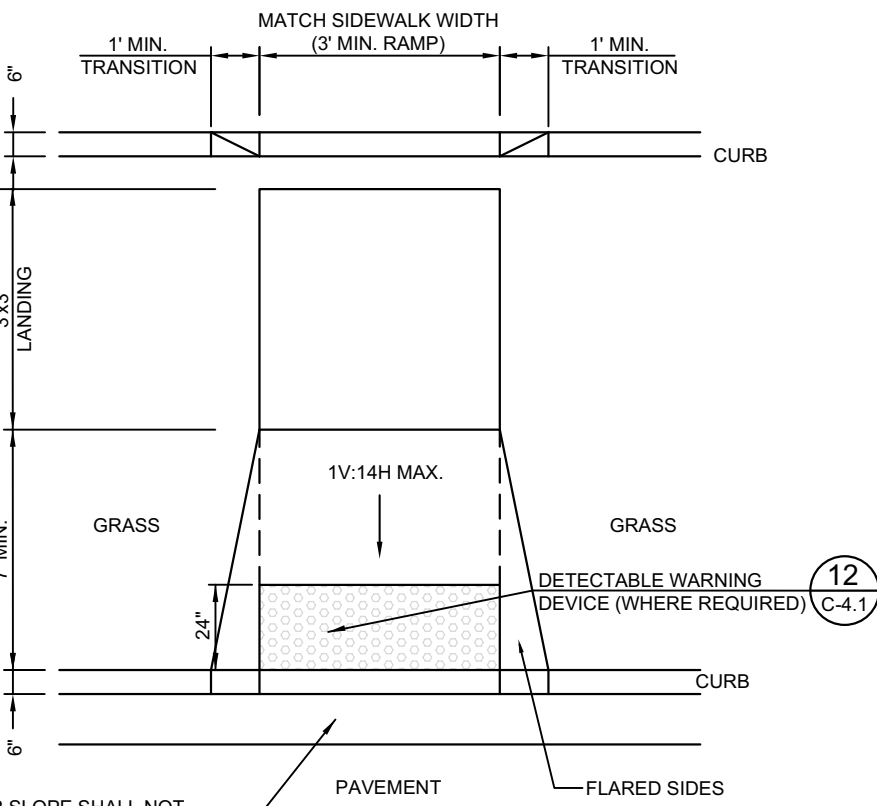


8 CURB RAMP w/ SHORT FLARED SIDES  
C-4.0 NOT TO SCALE

CIVIL TO VERIFY RAMP REQUIREMENTS BY STATE.

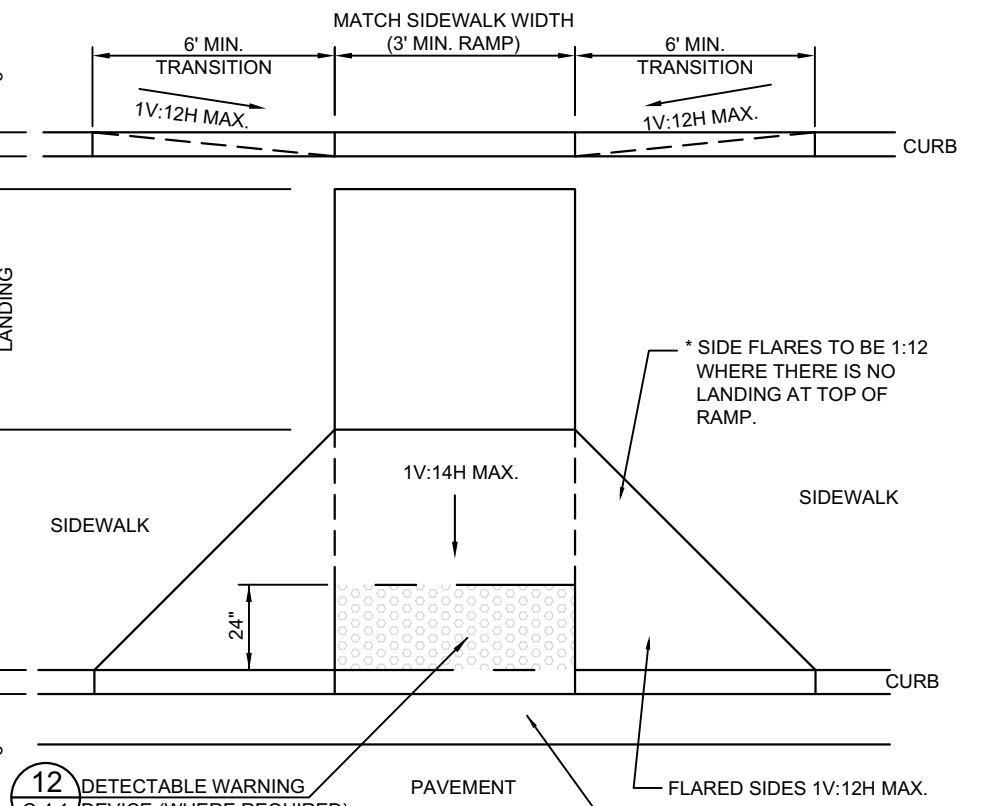


9 CURB RAMP w/ FLARED SIDES  
C-4.0 NOT TO SCALE

CIVIL TO VERIFY RAMP REQUIREMENTS BY STATE.

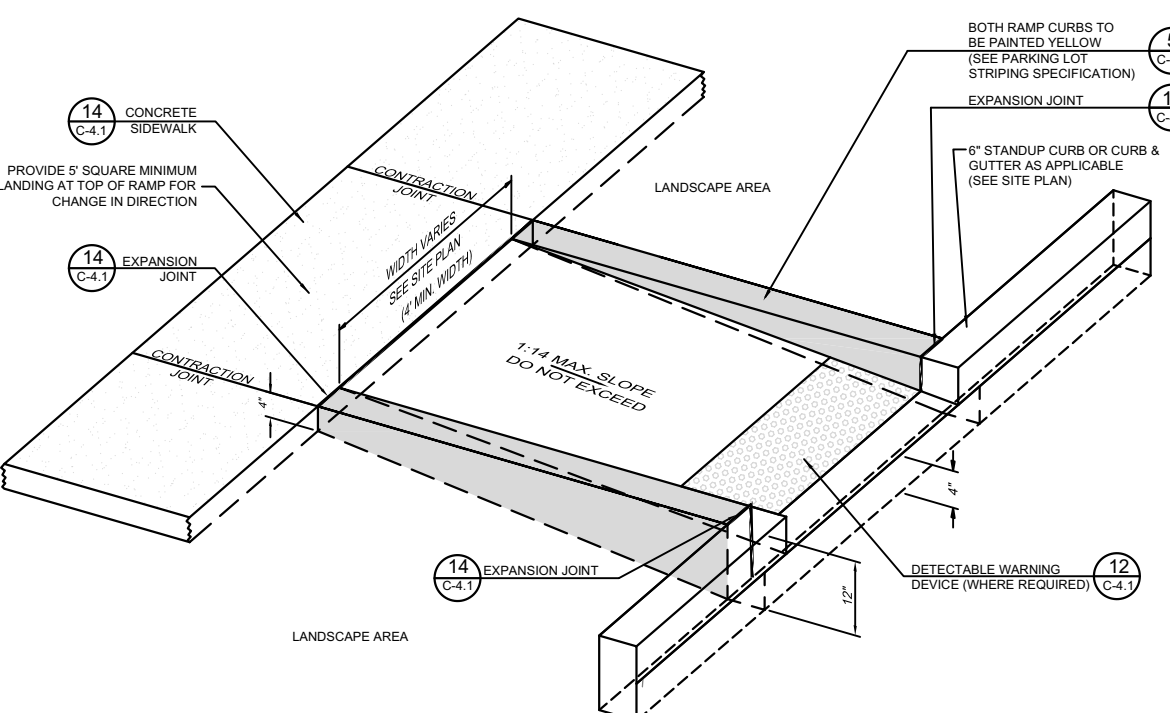

10 RETURNED CURB RAMP  
C-4.0 NOT TO SCALE

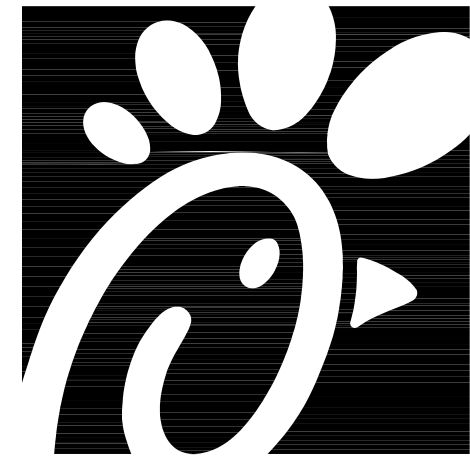

Chick-fil-A


Chick-fil-A  
5200 Buffington Road  
Atlanta, Georgia 30349-2998

Bowman

Certificate of Authorization License No. 30462  
910 SE 17th St, Suite 350  
Fort Lauderdale, FL 33316  
Phone: (954) 714-8481  
www.bowman.com  
© 2021 Bowman Consulting Group Ltd

Seal

This item has been digitally signed and sealed by Andres Mizrahi, P.E. on the date adjacent to this seal.

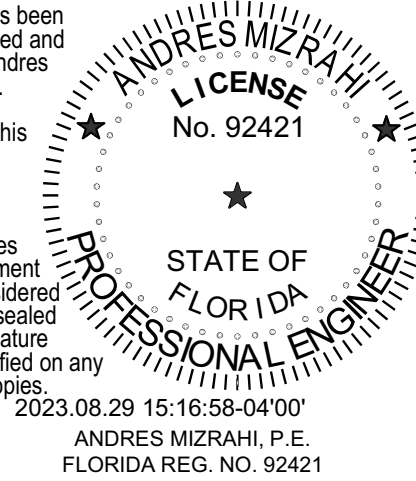

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

2023.08.29 15:16:58-0400  
ANDRES MIZRAHI, P.E.  
FLORIDA REG. NO. 92421

CHICK-FIL-A  
ATLANTIC & ATLANTIC BLVD  
POMPA NO BEACH, FL 33069

FSR#05557

BUILDING TYPE / SIZE: P14 LS BN

REVISION SCHEDULE  
NO. DATE DESCRIPTION

CONSULTANT PROJECT # 010014-01-208

PRINTED FOR PERMIT

DATE 8/24/2023

DRAWN BY STC

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any form without the written consent of Chick-fil-A.

CHICK-FIL-A DETAILS

HEET NUMBER

HEET NUMBER

HEET NUMBER

HEET NUMBER

HEET NUMBER

HEET NUMBER

HEET NUMBER

HEET NUMBER