

EXISTING TREE INVENTORY

5/30/25


TREE NO.	COMMON NAME	BOTANICAL NAME	SIZE DBH. HT. XSPR	CONDITION	DISPOSITION	VALUE
1.	QUEEN PALM	ARECASTRUM ROMANZOFFIANUM	5' CT.	80%	REMOVE	
2.	SEA GRAPE	COCOLOBIS UVIFERA	25" DBH. 40'X45'	60%	REMOVE/MIT	\$ 8,400.00
3.	CREPE MYRTLE	LAGERSTROEMIA INDICA	MULTI 13' X 7'	78%	RELOCATE	
4.	CREPE MYRTLE	LAGERSTROEMIA INDICA	4" MULTI 8'X 5'	60%	REMOVE/MIT	\$ 425.00
5.	SABAL PALM	SABAL PALMETTO	4' CT.	85%	REMOVE	
6.	SABAL PALM	SABAL PALMETTO	8' CT.	85%	REMAIN	
7.	SABAL PALM	SABAL PALMETTO	12' CT.	85%	REMAIN	
8.	FIDDLE LEAF FIG	FICUS LYRATA	10" DBH. 25'X30'	65%	REMMOVE/MIT	\$ 4,000.00

TOTAL DBH. OF TREES REMOVED = 39"
REPLACEMENT TREES REQUIRED = 39" (SEE SHEET L-1 FOR MITIGATION PROVIDED)

NO TREES SHALL BE REMOVED OR RELOCATED WITHOUT A TREE REMOVAL PERMIT ISSUED BY THE CITY OF POMPANO
TREE APPRAISALS ARE PER THE I.S.A. TRUNK FORMULA METHOD

\$ 12,425.00

KEY



TREE TO BE RELOCATED



TREE/PALM TO BE REMOVED



PALM TO REMAIN IN PLACE

RELOCATION / TRANSPLANTING NOTES

All relocated trees less than 9" (measured 12" above grade) shall be relocated using a 90" tree spade by an operator experienced and trained in this area. The Landscape Architect will supply a list of local companies capable of this type of work upon request. Contractor is responsible to root prune trees a min. of 6 weeks prior to relocation.

Trees larger than 9" cal. (measured 12" above grade) shall be root pruned by hand by a certified arborist with a sharp tool that leaves all cuts smooth. Live Oaks shall be root pruned a min of 12 weeks in prior to relocation. Landscape Architect's approval and special relocation specifications shall be required if root pruning 12 weeks prior to relocation is not possible.

No species of tree shall be moved with less than 90-120 days between root pruning and relocation.

Trees larger than 9" (measured 12" above grade) shall be relocated by means of a crane by a company experienced and trained in this area. The Landscape Architect will supply a list of local companies capable of this type of work upon request.

All relocations shall be done in one move.


It is the contractor's responsibility to install 2 temporary irrigation systems to cover each of the trees scheduled to be relocated. This includes the water and power source. Each shade tree shall have two flood bubblers within a soil berm around the rootball. Each palm shall have one flood bubbler within a soil berm around the rootball.

A. One system shall be installed prior to tree relocation. Each tree scheduled to be relocated shall be irrigated immediately following root pruning. Trees not scheduled for root pruning shall be irrigated at the same time and by the same method as root pruned trees.

B. A second system irrigating each relocated tree shall be installed immediately following relocation.

Both of these systems will irrigate on a schedule determined by those responsible for the relocation of the trees, and in consideration of tree species and soil type.

Installation of relocated trees shall also adhere to all details and specifications applicable to nursery stock.

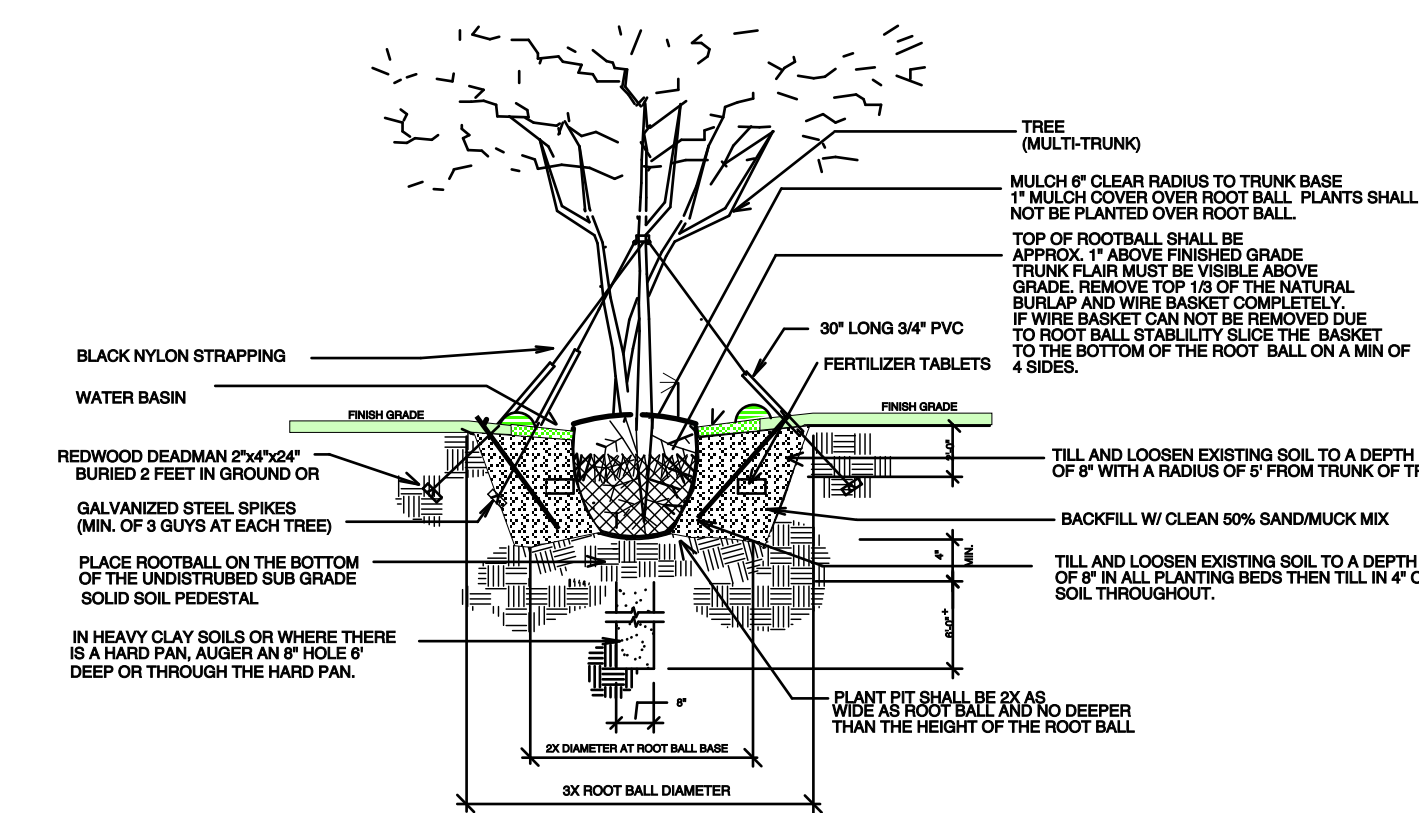

MULTI - TRUNK GUYING AND PLANTING DETAIL

NOT TO SCALE

NOTE:
PER CITY CODE 155.5203A.3 CONTRACTOR SHALL INSTALL BAHIA SOD IN PLACE OF DEMOLITION OR DISTUBED AREAS BEFORE CLOSE OUT OF THE DEMOLITION BUILDING PERMIT AND THEREAFTER MAINTAINED. ALL ASPHALT, ROCK, AND OTHER NON NATURAL MATERIALS SHALL BE REMOVED DOWN TO NATIVE SOIL AND REFILLED TO THE UNDISTURBED LOT LEGEL WITH CLEAN SOIL BEFORE ANY PLANTING OR INSTALLATION OF THE REQUIRED DROUGHT-RESISTANT SOD OR GROUND COVER. SUCH VEGETATIVE RESTORATION OF THE DEMOLITION SITE SHALL BE SUBJECT TO THE STANDARDS OF THIS SECTION IF CONDITIONS STATED ABOVE ARE MET. ALL TREES ARE TO BE PROTECTED DURING DEMOLTION ACTIVITIES TREE REMOVAL DURING DEMOLITION IS NOT PERMITTED.




PROJECT:

NEW MULTI FAMILY

216 SE 23rd Avenue
Pompano Beach, FL.

SHEET:

EXISTING TREE DISPOSITION PLAN

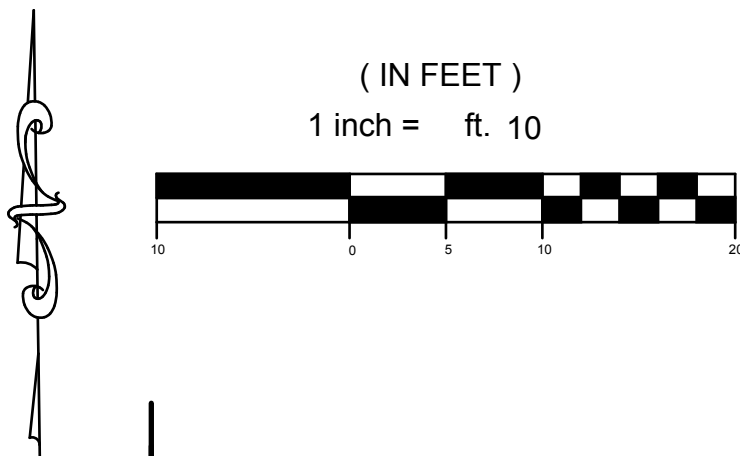

DATE: 5/23/24

SCALE: 1"=10'

SITE REV: 5/30/25

L-2

OF-3