

- PUBLIC ROADWAY PAVING SPECS
1. PAVING COURSE: 1.5" TYPE "S3" ASPHALT (2 LIFTS)
TACK COAT TO BE USED BETWEEN LIFTS
 2. BASE COURSE: 8" LIMEROCK BASE (PRIMED) LBR 100.
W/MINIMUM 70% CARBONATES.
 3. SUBGRADE: 12" STABILIZED SUBGRADE (MINIMUM LBR 40)


ELEVATION NOTES

1. ALL ELEVATIONS SHOWN ON THIS PLAN ARE BASED ON THE NAVD 88 DATUM.



Call 811 or www.sunshine811.com two full business days before digging to have utilities located and marked.

Check positive response codes before you dig!

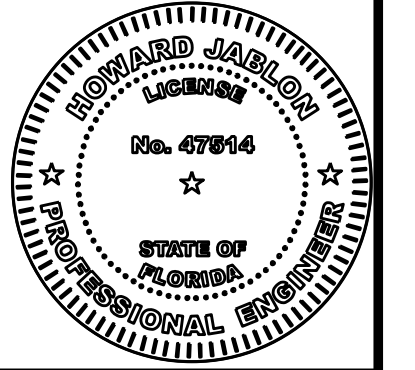

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED
BY HOWARD E JABLON ON THE DATE ADJACENT TO THE
SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT
CONSIDERED SIGNED AND SEALED AND THE SIGNATURE
MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

[illegible]

AJ HYDRO
ENGINEERING, INC.
5932 NW 73RD COURT
PARKLAND, FL 33067
TEL (954) 347-3397
AJHYDRO@BELLSOUTH.NET

PROJECT:

TITLE:

PAVING & GRADING CROSS SECTIONS

SEAL:

HOWARD JABLON, PE
#47514

DATE:

05/04/25

DRAWING NO.

25-0110

SHEET NO.

PD3 OF 5