


### TYPICAL FENCE POST

TYPICAL FENCE

## CHAIN LINK FENCE INSTALLATION DETAILS

NOTE:  
ALL FENCE POST INSTALATIONS MUST MEET ALL FLORIDA BUILDING CODES

ENGINEERING STANDARDS 2022			
REVISIONS		ENGINEERING DIVISION CITY OF POMPANO BEACH	CHAIN LINK FENCE
BY	DATE		
		SCALE: N.T.S.	DATE: MAY 2022 DWG. NO. <b>303-2</b>

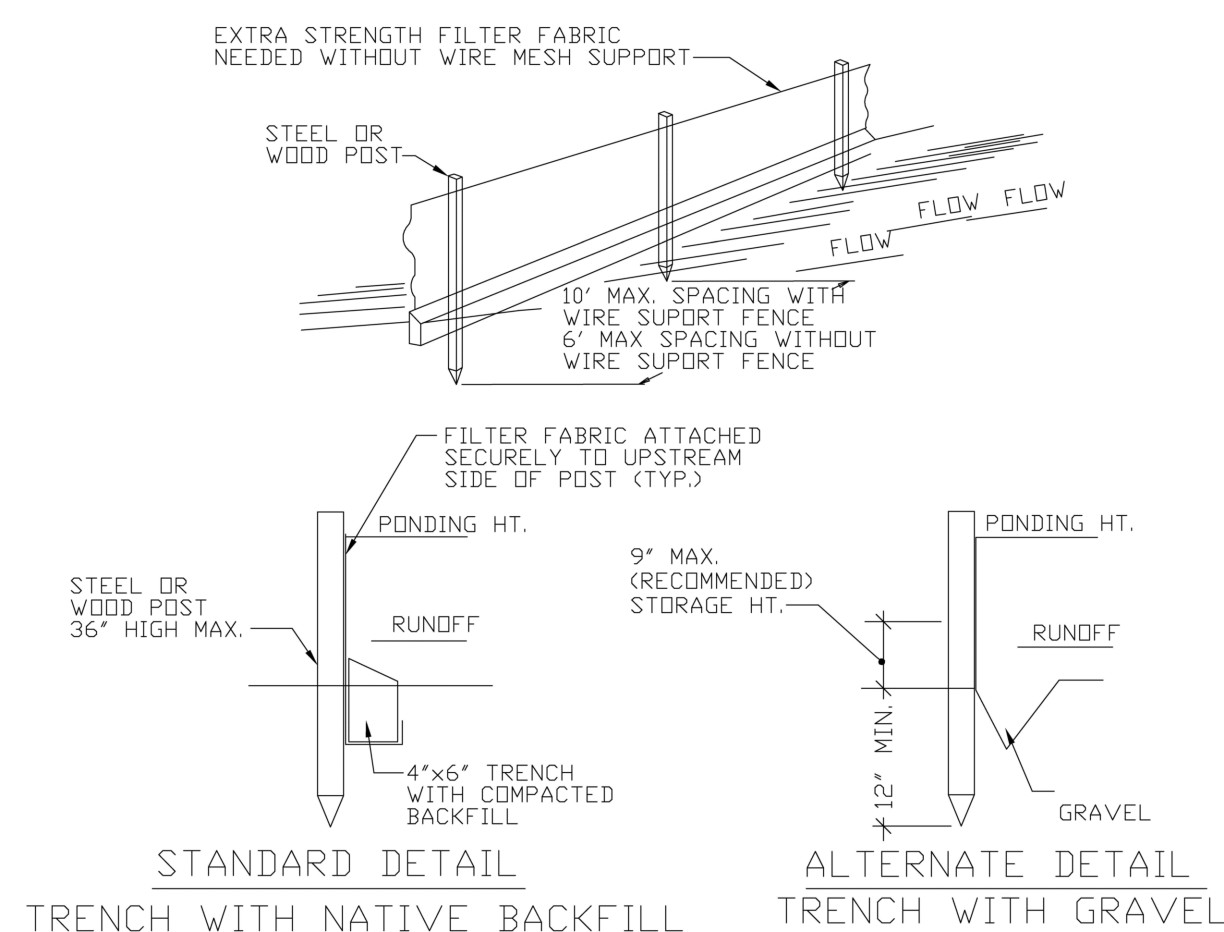


SILT FENCE

EROSION CONTROL GENERAL NOTES

1. SILT FENCE AND TURBIDITY BARRIERS MUST REMAIN IN PLACE AND BE MAINTAINED AT ALL LOCATIONS SHOWN IN THE DRAWINGS UNTIL CONSTRUCTION IS COMPLETED. AFTER A AREA IS STABILIZED, THE SILT FENCE MUST BE REMOVED.
2. THE EROSION CONTROL SCHEDULE FOR THE INSTALLATION, INSPECTION AND MAINTENANCE OF THE EROSION CONTROL FEATURES AS SHOWN IN THE DRAWINGS OR AS DIRECTED BY THE DESIGN ENGINEER. THE SCHEDULE SHALL SPECIFICALLY ADDRESS THE EROSION CONTROL FEATURES TO BE INSTALLED, THE FREQUENCY OF INSPECTIONS, AND WHEN THE EROSION CONTROL FEATURE WILL BE INSTALLED, INSPECTED, AND MAINTAINED. IT SHALL ALSO INCLUDE METHODS TO PREVENT POLLUTION OF STREAM, LAKES, TIDAL WATERS, CANALS, AND IMPOUNDMENTS.


ENGINEERING STANDARDS 2022			
REVISIONS		ENGINEERING DIVISION CITY OF POMPANO BEACH	SILT FENCE
BY	DATE		
SCALE: N.T.S.		DATE: MAY 2022	DWG. NO.
		509-1	

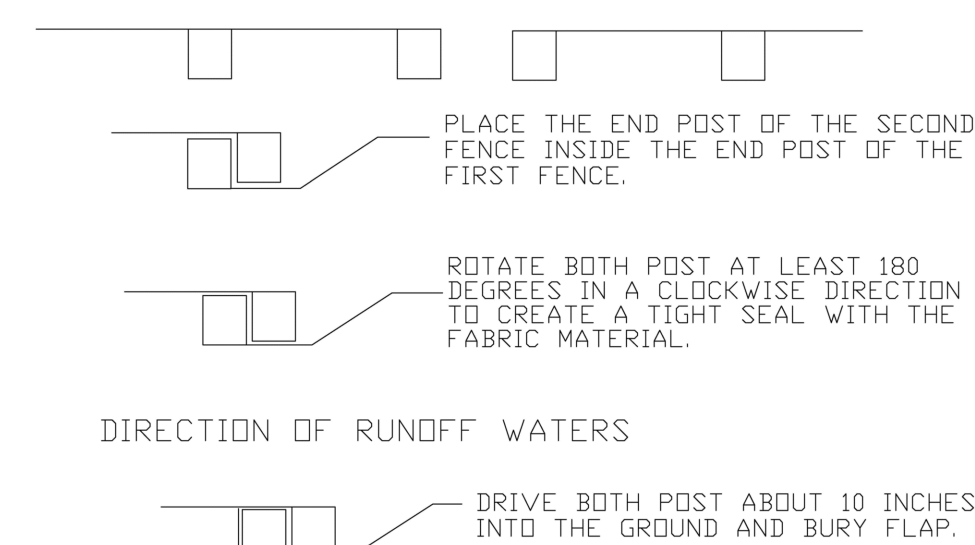

- NOTES:
1. INSPECT AND REPAIR FENCE AFTER EACH STORM EVENT AND REMOVE SEDIMENT WHEN NECESSARY.
  2. REMOVED SEDIMENT SHALL BE DEPOSITED TO AN AREA THAT WILL NOT CONTRIBUTE SEDIMENT OFF-SITE AND CAN BE PERMANENTLY STABILIZED.
  3. SILT FENCE SHALL BE PLACED ON SLOPE CONTOURS TO MAXIMIZE PONDING EFFICIENCY.


## ATTACHING TWO SILT FENCES

ENGINEERING STANDARDS 2022			
REVISIONS		ENGINEERING DIVISION CITY OF POMPANO BEACH	ATTACHING TWO SILT FENCES  <div>             DATE: MAY 2022              DWG. NO. 509-2           </div>
BY	DATE		
SCALE: N.T.S.			

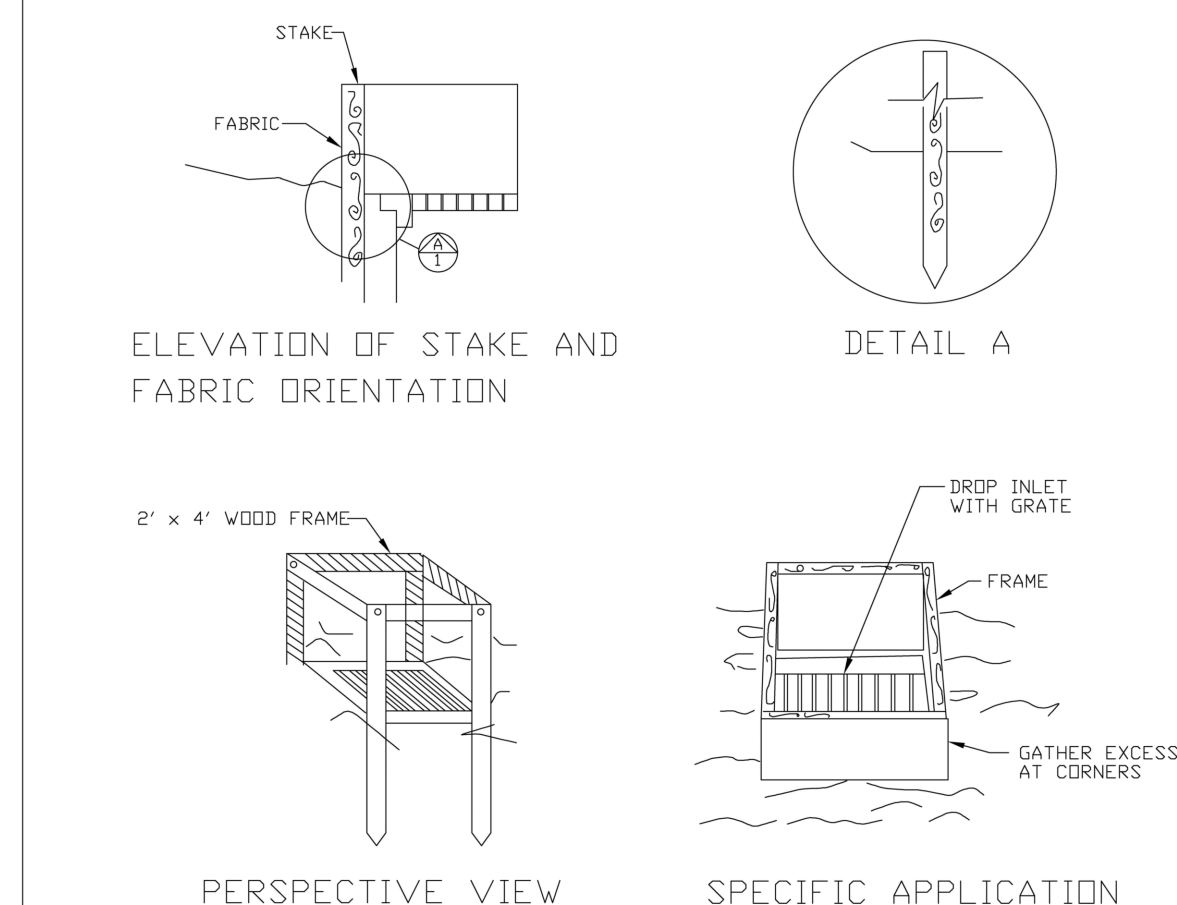

FILTER FABRIC  
DROP INLET SEDIMENT FILTER


ENGINEERING STANDARDS 2022			
REVISIONS		ENGINEERING DIVISION CITY OF POMPANO BEACH	FILTER FABRIC DROP INLET SEDIMENT FILTER
BY	DATE		
SCALE: N.T.S.		DATE: MAY 2022 DWG. NO.	508-1

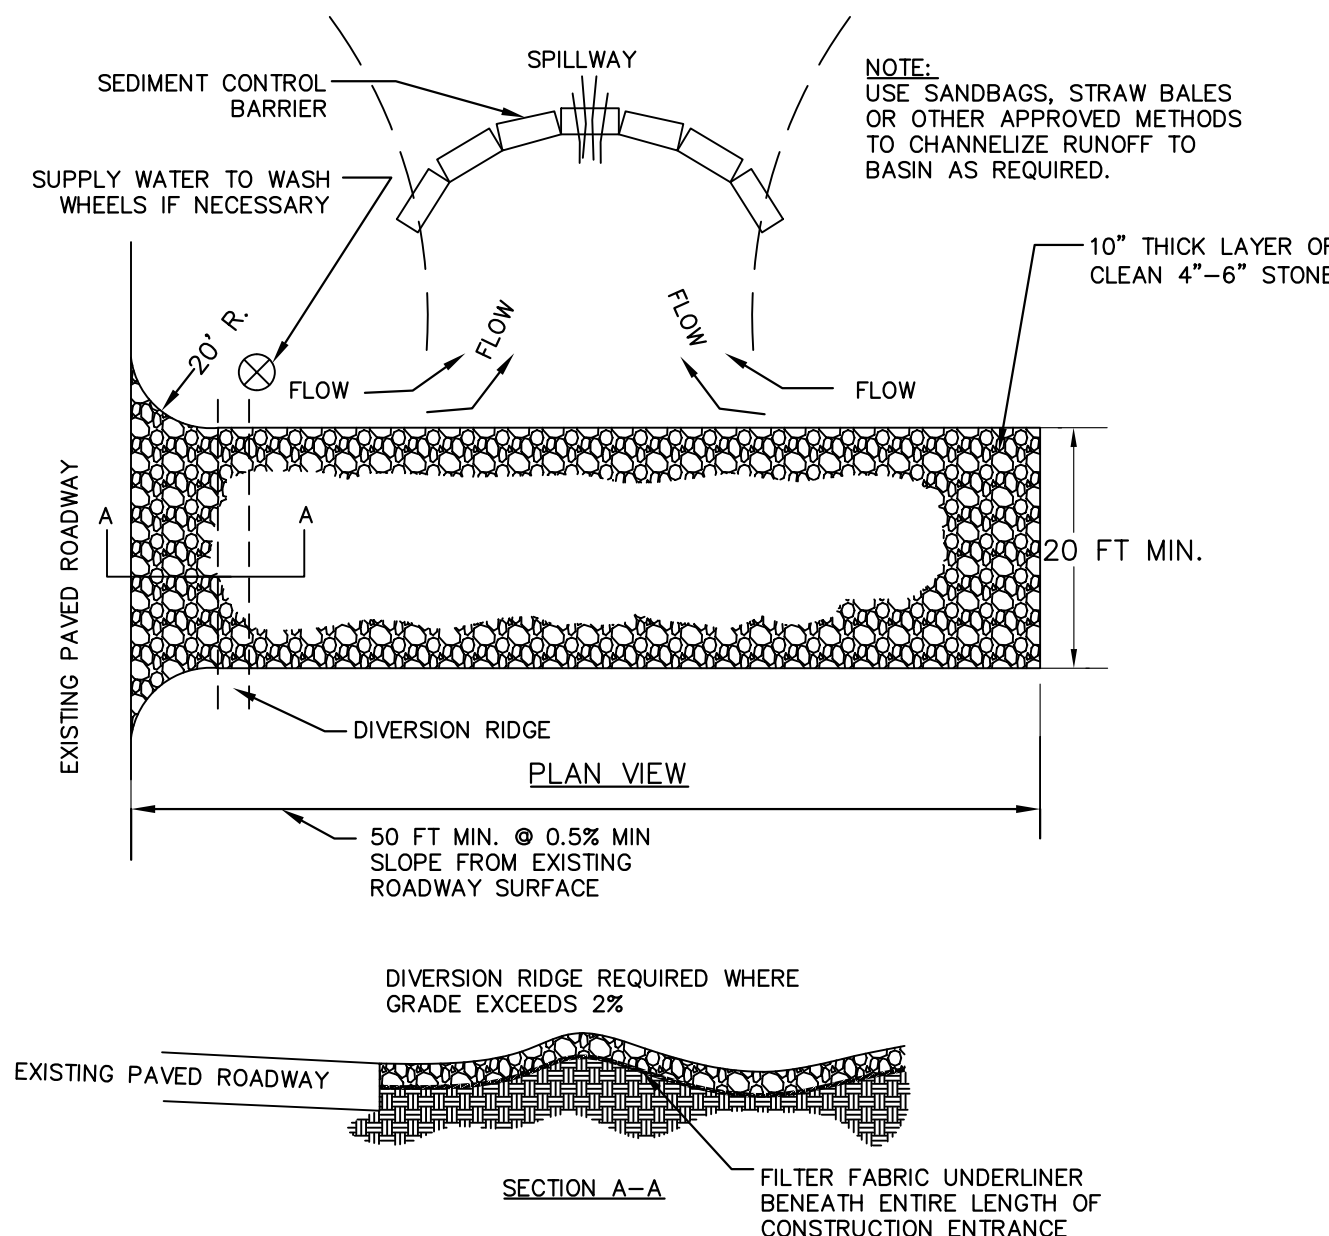

NOTES:

1. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHTS-OF-WAY. THIS MAY REQUIRE TOP DRESSING, REPAIR AND/OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT.
2. WHEN NECESSARY, WHEELS SHALL BE CLEANED PRIOR TO ENTRANCE ONTO PUBLIC RIGHT-OF-WAY.
3. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE THAT DRAINS INTO AN APPROVED SEDIMENT TRAP OR SEDIMENT BASIN.


**1 STABILIZED CONSTRUCTION ENTRANCE**  
N.T.S.

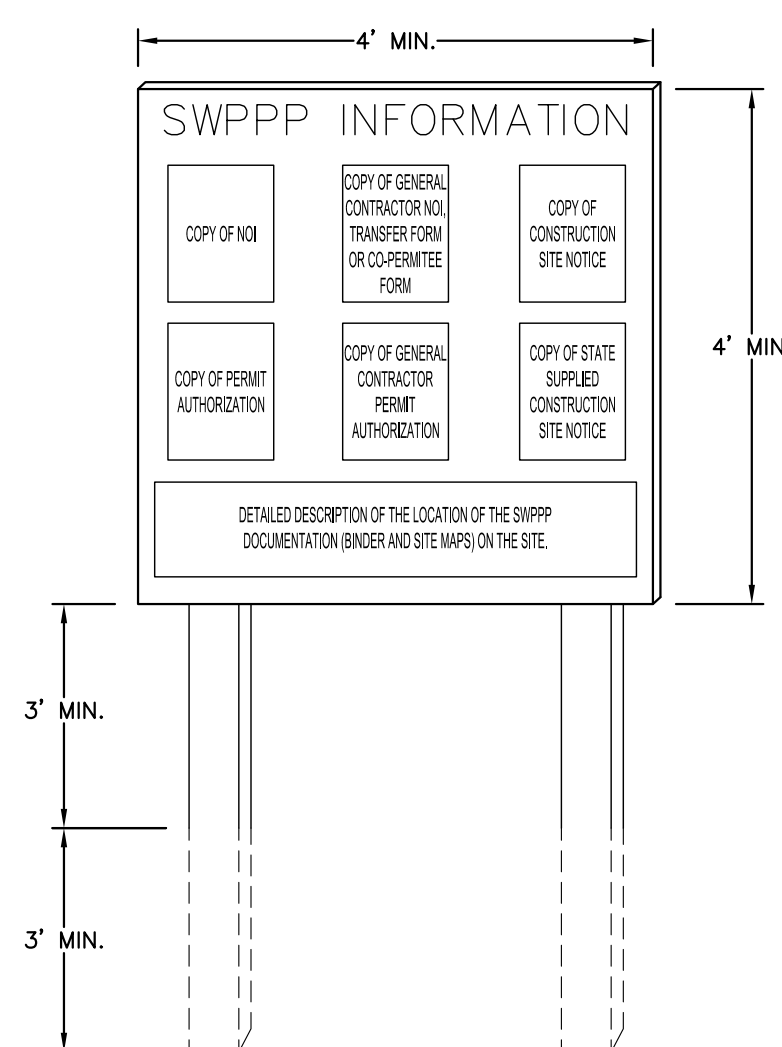

NOTES:

1. "SWPPP INFORMATION" MUST BE DISPLAYED PROMINENTLY ACROSS THE TOP OF THE SIGN, AS SHOWN IN THE DETAIL. THE SIGN IS TO BE CONSTRUCTED OF RIGID MATERIAL, SUCH AS PLYWOOD OR OUTDOOR SIGN BOARD. SIGNS ARE TO BE CONSTRUCTED IN A MANNER TO PROTECT THE SIGN FROM DAMAGE DUE TO WEATHER (WIND, SNOW, MOISTURE, ETC.).
2. SWPPP INFORMATION SIGN MUST BE LOCATED NEAR THE ENTRANCE/EXIT OF THE SITE, SUCH THAT IT IS ACCESSIBLE/VISIBLE BY THE GENERAL PUBLIC, BUT NOT OBSTRUCTING VIEWS AS TO CAUSE A SAFETY HAZARD.
3. THE POSITION OF THE SIGN MUST BE MAINTAINED IN A CLEARLY READABLE CONDITION AT ALL TIMES THROUGHOUT CONSTRUCTION AND MAINTENANCE. NOTICE-OF-TERMINATION (NOT) IS FILED FOR THE PERMIT.
4. CONTRACTOR SHALL POST OTHER STORM DRAINAGE EROSION AND SEDIMENT CONTROL RELATED PERMITS ON THE SIGN AS REQUIRED BY THE LOCAL AGENCY.
5. SIGN SHALL BE CONSIDERED A PART OF PUBLIC RIGHT-OF-WAY AND EASEMENTS UNLESS APPROVED BY THE GOVERNING AGENCY.
6. CONTRACTOR IS RESPONSIBLE FOR ENSURING STABILITY OF THIS SWPPP INFORMATION

**2** SWPP INFORMATION SIGN  
N.T.S.

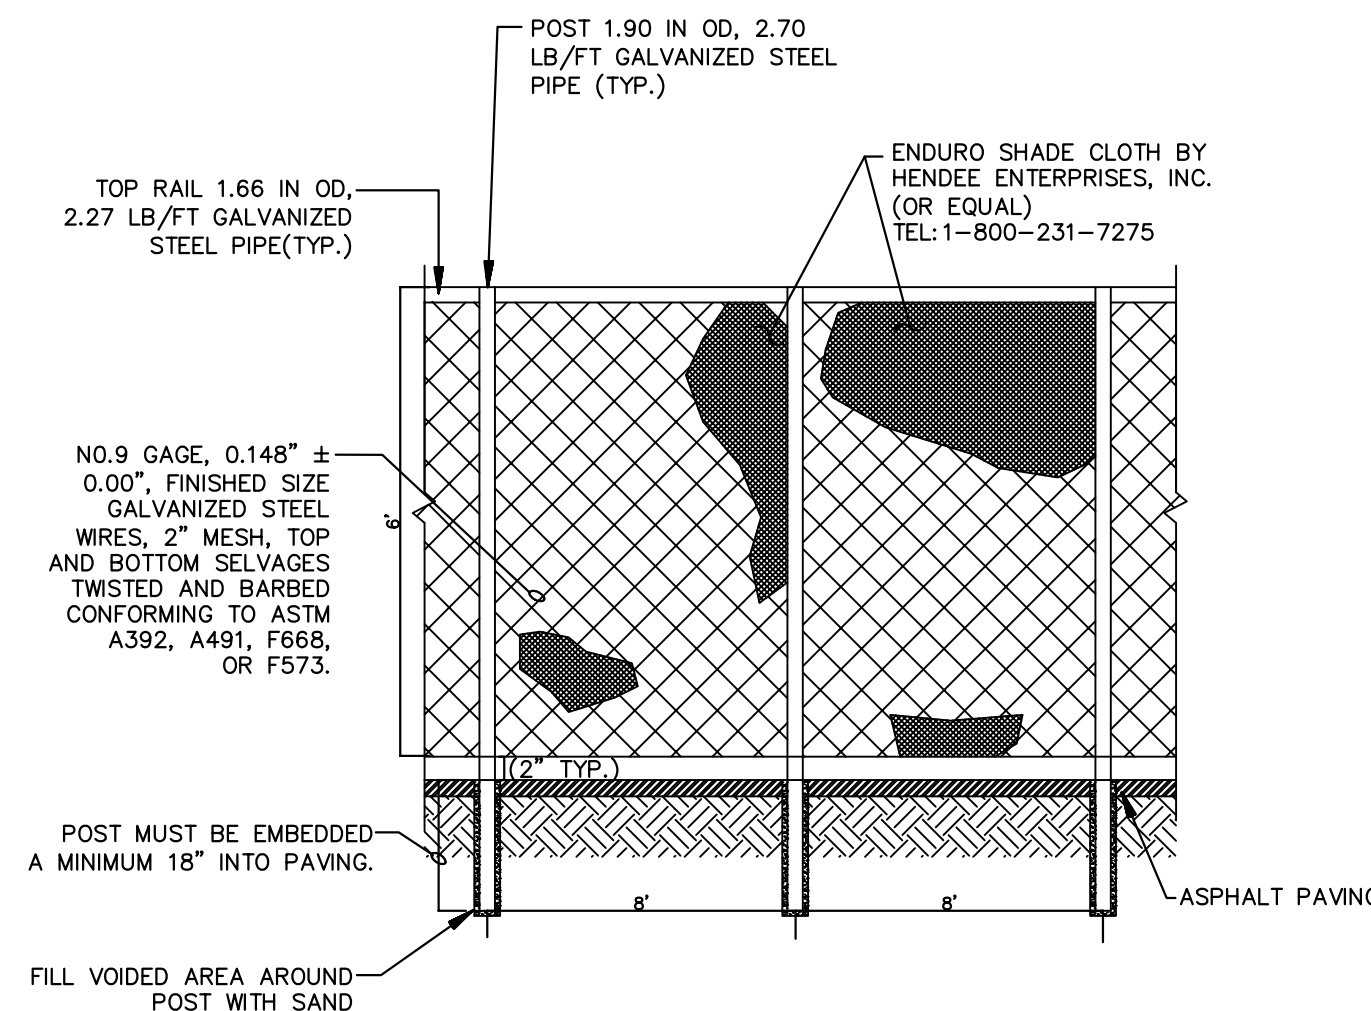

**3 6' CHAIN LINK CONSTRUCTION FENCE  
WITH VISUAL DUST SCREEN  
N.T.S.**

GEORGE BALABAN, STATE OF FLORIDA, PROFESSIONAL  
ENGINEER, LICENSE NO. 74543

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY  
GEORGE BALABAN, P.E. ON THE DATE INDICATED HERE.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED  
SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED  
ON ANY ELECTRONIC COPIES.

George Balaban

PLANS ARE IN NAVD 1988 DATUM  
CONVERSION EQUATION IS BELOW:  
(NAVD 1988) + 1.58' = (NGVD 1929)

THE PRESENCE OF GROUNDWATER SHOULD BE ANTICIPATED. CONTRACTOR'S BID SHALL INCLUDE CONSIDERATION FOR ADDRESSING THIS ISSUE AND OBTAINING ALL NECESSARY PERMITS.

**Always call 811 two full business days before you dig to have underground utilities located and marked.**

**Sunshine811.com**

## DEMOLITION & EROSION CONTROL DETAILS

**BREW FISH  
BREWERY**  
PREPARED FOR  
**CITY OF POMPAHO BEACH**  
CITY OF POMPAHO BEACH

SHEET NUMBER  
**C1.10**

LICENSED PROFESSIONAL

---

GEORGE BALABAN, P.E.

FL LICENSE NUMBER  
74543  
12/11/2024

KHA PROJECT 044203010	DATE DEC 2024	SCALE AS SHOWN	DESIGNED BY TVC	DRAWN BY TVC	CHECKED BY GR
--------------------------	------------------	----------------	-----------------	--------------	---------------

**Kimley»»Horn**

© 2024 KIMLEY-HORN AND ASSOCIATES, INC.  
8201 PETERS ROAD, SUITE 2200, PLANTATION, FL 3332  
PHONE: 954-535-5100 FAX: 954-739-2247  
WWW.KIMLEY-HORN.COM REGISTRY No. 35106

REVISIONS

1	CIT COMMENTS	12/19/24	IVC
NO	REVISIONS	DATE	BY