



Schedule								
Symbol	Label		Catalog Number	Lamp	Number Lamps	Lumens per Lamp	Description	LLF Wattage
	LT01		WDGE1 LED P0 40K 80CRI VW		1	760	WDGE1 LED WITH P0 - PERFORMANCE PACKAGE, 4000K, 80CRI, VISUAL COMFORT WIDE OPTIC	0.86 6.7947
	LT02		DSX1 LED P8 40K 80CRI TFTM HS		1	22041	D-Series Size 1 Area Luminaire P8 Performance Package 4000K CCT 80 CRI Forward Throw Houseside Shield	0.86 215.7732

D-Series Size 1 LED Area Luminaire

d'series

Specifications

EPAL	0.69 ft ² (0.064 m ²)
Length	32.71" (840 mm)
Width	14.56" (369 mm)
Height H1	10.98" (279 mm)
Height H2	2.73" (69 mm)
Weight	17.43 lb (7.91 kg)

CS Design Select luminaire is designed for indoor use only.

Ordering Information

DS1 LED

Finish	Size	Input voltage	Color temperature	Beam angle	Power	Warranty	Notes
DS1H1	Forward opto	120 volt AC only					
	PA	120	3000K	30°/36°	100W	5	400
	PA	120	3500K	30°/36°	100W	5	400
	PA	120	4000K	30°/36°	100W	5	400
	PA	120	5000K	30°/36°	100W	5	400
	PA	120	5600K	30°/36°	100W	5	400
	PA	120	6500K	30°/36°	100W	5	400
	PA	120	7000K	30°/36°	100W	5	400
	PA	120	7500K	30°/36°	100W	5	400
	PA	120	8000K	30°/36°	100W	5	400
	PA	120	8500K	30°/36°	100W	5	400
	PA	120	9000K	30°/36°	100W	5	400
	PA	120	9500K	30°/36°	100W	5	400
	PA	120	10000K	30°/36°	100W	5	400
	PA	120	10500K	30°/36°	100W	5	400
	PA	120	11000K	30°/36°	100W	5	400
	PA	120	11500K	30°/36°	100W	5	400
	PA	120	12000K	30°/36°	100W	5	400
	PA	120	12500K	30°/36°	100W	5	400
	PA	120	13000K	30°/36°	100W	5	400
	PA	120	13500K	30°/36°	100W	5	400
	PA	120	14000K	30°/36°	100W	5	400
	PA	120	14500K	30°/36°	100W	5	400
	PA	120	15000K	30°/36°	100W	5	400
	PA	120	15500K	30°/36°	100W	5	400
	PA	120	16000K	30°/36°	100W	5	400
	PA	120	16500K	30°/36°	100W	5	400
	PA	120	17000K	30°/36°	100W	5	400
	PA	120	17500K	30°/36°	100W	5	400
	PA	120	18000K	30°/36°	100W	5	400
	PA	120	18500K	30°/36°	100W	5	400
	PA	120	19000K	30°/36°	100W	5	400
	PA	120	19500K	30°/36°	100W	5	400
	PA	120	20000K	30°/36°	100W	5	400
	PA	120	20500K	30°/36°	100W	5	400
	PA	120	21000K	30°/36°	100W	5	400
	PA	120	21500K	30°/36°	100W	5	400
	PA	120	22000K	30°/36°	100W	5	400
	PA	120	22500K	30°/36°	100W	5	400
	PA	120	23000K	30°/36°	100W	5	400
	PA	120	23500K	30°/36°	100W	5	400
	PA	120	24000K	30°/36°	100W	5	400
	PA	120	24500K	30°/36°	100W	5	400
	PA	120	25000K	30°/36°	100W	5	400
	PA	120	25500K	30°/36°	100W	5	400
	PA	120	26000K	30°/36°	100W	5	400
	PA	120	26500K	30°/36°	100W	5	400
	PA	120	27000K	30°/36°	100W	5	400
	PA	120	27500K	30°/36°	100W	5	400
	PA	120	28000K	30°/36°	100W	5	400
	PA	120	28500K	30°/36°	100W	5	400
	PA	120	29000K	30°/36°	100W	5	400
	PA	120	29500K	30°/36°	100W	5	400
	PA	120	30000K	30°/36°	100W	5	400
	PA	120	30500K	30°/36°	100W	5	400
	PA	120	31000K	30°/36°	100W	5	400
	PA	120	31500K	30°/36°	100W	5	400
	PA	120	32000K	30°/36°	100W	5	400
	PA	120	32500K	30°/36°	100W	5	400
	PA	120	33000K	30°/36°	100W	5	400
	PA	120	33500K	30°/36°	100W	5	400
	PA	120	34000K	30°/36°	100W	5	400
	PA	120	34500K	30°/36°	100W	5	400
	PA	120	35000K	30°/36°	100W	5	400
	PA	120	35500K	30°/36°	100W	5	400
	PA	120	36000K	30°/36°	100W	5	400
	PA	120	36500K	30°/36°	100W	5	400
	PA	120	37000K	30°/36°	100W	5	400
	PA	120	37500K	30°/36°	100W	5	400
	PA	120	38000K	30°/36°	100W	5	400
	PA	120	38500K	30°/36°	100W	5	400
	PA	120	39000K	30°/36°	100W	5	400
	PA	120	39500K	30°/36°	100W	5	400
	PA	120	40000K	30°/36°	100W	5	400
	PA	120	40500K	30°/36°	100W	5	400
	PA	120	41000K	30°/36°	100W	5	400
	PA	120	41500K	30°/36°	100W	5	400
	PA	120	42000K	30°/36°	100W	5	400
	PA	120	42500K	30°/36°	100W	5	400
	PA	120	43000K	30°/36°	100W	5	400
	PA	120	43500K	30°/36°	100W	5	400
	PA	120	44000K	30°/36°	100W	5	400
	PA	120	44500K	30°/36°	100W	5	400
	PA	120	45000K	30°/36°	100W	5	400
	PA	120	45500K	30°/36°	100W	5	400
	PA	120	46000K	30°/36°	100W	5	400
	PA	120	46500K	30°/36°	100W	5	400
	PA	120	47000K	30°/36°	100W	5	400
	PA	120	47500K	30°/36°	100W	5	400
	PA	120	48000K	30°/36°	100W	5	400
	PA	120	48500K	30°/36°	100W	5	400
	PA	120	49000K	30°/36°	100W	5	400
	PA	120	49500K	30°/36°	100W	5	400
	PA	120	50000K	30°/36°	100W	5	400
	PA	120	50500K	30°/36°	100W	5	400
	PA	120	51000K	30°/36°	100W	5	400
	PA	120	51500K	30°/36°	100W	5	400
	PA	120	52000K	30°/36°	100W	5	400
	PA	120	52500K	30°/36°	100W	5	400
	PA	120	53000K	30°/36°	100W	5	400
	PA	120	53500K	30°/36°	100W	5	400
	PA	120	54000K	30°/36°	100W	5	400
	PA	120	54500K	30°/36°	100W	5	400
	PA	120	55000K	30°/36°	100W	5	400
	PA	120	55500K	30°/36°	100W	5	400
	PA	120	56000K	30°/36°	100W	5	400
	PA	120	56500K	30°/36°	100W	5	400
	PA	120	57000K	30°/36°	100W	5	400
	PA	120	57500K	30°/36°	100W	5	400
	PA	120	58000K	30°/36°	100W	5	400
	PA	120	58500K	30°/36°	100W	5	400
	PA	120	59000K	30°/36°	100W	5	400
	PA	120	59500K	30°/36°	100W	5	400
	PA	120	60000K	30°/36°	100W	5	400
	PA	120	60500K	30°/36°	100W	5	400
	PA	120	61000K	30°/36°	100W	5	400
	PA	120	61500K	30°/36°	100W	5	400
	PA	120	62000K	30°/36°	100W	5	400
	PA	120	62500K	30°/36°	100W	5	400
	PA	120	63000K	30°/36°	100W	5	400
	PA	120	63500K	30°/36°	100W	5	400
	PA	120	64000K	30°/36°	100W	5	400
	PA	120	64500K	30°/36°	100W	5	400
	PA	120	65000K	30°/36°	100W	5	400
	PA	120	65500K	30°/36°	100W	5	400
	PA	120	66000K	30°/36°	100W	5	400
	PA	120	66500K	30°/36°	100W	5	400
	PA	120	67000K	30°/36°	100W	5	400
	PA	120	67500K	30°/36°	100W	5	400
	PA	120	68000K	30°/36°	100W	5	400
	PA	120	68500K	30°/36°	100W	5	400
	PA	120	69000K	30°/36°	100W	5	400
	PA	120	69500K	30°/36°	100W	5	400
	PA	120	70000K	30°/36°	100W	5	400
	PA	120	70500K	30°/36°	100W	5	400
	PA	120	71000K	30°/36°	100W	5	400
	PA	120	71500K	30°/36°	100W	5	400
	PA	120	72000K	30°/36°	100W	5	400
	PA	120	72500K	30°/36°	100W	5	400
	PA	120	73000K	30°/36°	100W	5	400
	PA	120	73500K	30°/36°	100W	5	400
	PA	120	74000K	30°/36°	100W	5	400
	PA	120	74500K	30°/36°	100W	5	400
	PA	120	75000K	30°/36°	100W	5	400
	PA	120	75500K	30°/36°	100W	5	400
	PA	120	76000K	30°/36°	100W	5	400
	PA	120	76500K	30°/36°	100W	5	400
	PA	120	77000K	30°/36°	100W	5	400
	PA	120	77500K	30°/36°	100W	5	400
	PA	120	78000K	30°/36°	100W	5	400
	PA	120	78500K	30°/36°	100W	5	400
	PA	120	79000K	30°/36°	100W	5	400
	PA	120	79500K	30°/36°	100W	5	400
	PA	120	80000K	30°/36°	100W	5	400
	PA	120	80500K	30°/36°	100W	5	400
	PA	120	81000K	30°/36°	100W	5	400
	PA	120	81500K	30°/36°	100W	5	400
	PA	120	82000K	30°/36°	100W	5	400
	PA	120	82500K	30°/36°	100W	5	400
	PA	120	83000K	30°/36°	100W	5	400
	PA	120	83500K	30°/36°	100W	5	400
	PA	120	84000K	30°/36°	100W	5	400
	PA	120	84500K	30°/36°	100W	5	400
	PA	120	85000K	30°/36°	100W	5	400
	PA	120	85500K	30°/36°	100W	5	400
	PA	120	86000K	30°/36°	100W	5	400
	PA	120	86500K	30°/36°	100W	5	400
	PA	120	87000K	30°/36°	100W	5	400
	PA	120	87500K	30°/36°	100W	5	400
	PA	120	88000K	30°/36°	100W	5	400
	PA	120	88500K	30°/36°	100W	5	400
	PA	120	89000K	30°/36°	100W	5	400



MATTHEW R. FORGET // REG. FL. NO. AR95364

CLIENT / PROJECT ADDRESS:


1857 NW 21ST STREET
POMPANO BEACH, FLORIDA 33069

1857 NW 21ST STREET
POMPANO BEACH, FLORIDA 33069

REVISIONS:		
NO.	DATE	DESCRIPTION

KEY PLAN

B&K PROJECT#: 2025-0073

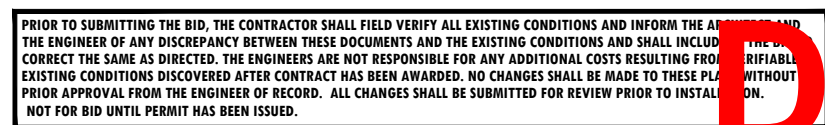

3601 NW 2ND AVE
BOCA RATON, FL 33431

MECH. DEPT.
TEL:561-716-7120

ELEC DEPT.
TEL:954-644-9612

CERTIFICATION OF
AUTHORIZATION
NO. 31989

STING CONDITIONS AND INFORM THE AGENCY OF ANY CHANGING CONDITIONS, AND SHALL INCLUDE:

06/11/2025

DATE _____

DRC ESPH-1.1

PZ25-12000024

08/06/2025