


1. THIS PLAN REFLECTS THE ENGINEER'S SUGGESTION FOR EROSION AND SEDIMENT CONTROL. SITE OPERATOR TO MODIFY PLAN AS NEEEDED TO MAINTAIN "BEST MANAGEMENT PRACTICES" DURING CONSTRUCTION.
2. AT ALL TIMES DURING CONSTRUCTION, ALL STORMWATER MUST REMAIN ON-SITE. NO DISCHARGE INTO THE PUBLIC RIGHT OF WAY OR ADJOINING PROPERTIES IS ALLOWED.
3. DRAINAGE STRUCTURES INSTALLED TO BE PROTECTED WITH FILTER FABRIC AND/OR PERIMETER SILT FENCE.
4. PROVIDE FILTER FABRIC OR OTHER METHOD OF SEDIMENT PROTECTION FOR ANY EXISTING CATCH BASIN/INLET WITHIN 100 FEET OF THE PROJECT AREA.
5. ANY SEDIMENT THAT IS TRACKED ONTO ROADS MUST BE SWEEPED UP IMMEDIATELY.
6. SEDIMENT SHALL NOT BE REMOVED BY WASHING/FLUSHING WITH WATER AT THE RIGHT OF WAY.
7. PRIOR TO START OF CONSTRUCTION, AN ENGINEERING ROUGH INSPECTION MUST BE SCHEDULED TO VERIFY EROSION AND SEDIMENTATION CONTROL IS SET UP PROPERLY AND SO INSPECTION CAN BE USED AS BASIS FOR CONSTRUCTION MODIFICATION TO REQUEST AN INSPECTION.

Revisions		
1		
2		
3		
4		
5		
6		
7		
8		

Phase:
PERMIT
DOCUMENTS

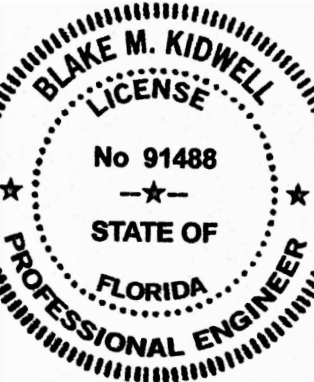

Scale: 1"=20'	Date 12/18/24
Job No. 24-1832.00	Plot Date 08/19/25
Drawn by BMK	Sheet No. ESC
Proj. Mgr. BMK	
Appr. by BMK	4 of -