



PAVING & DRAINAGE DETAILS PLAN

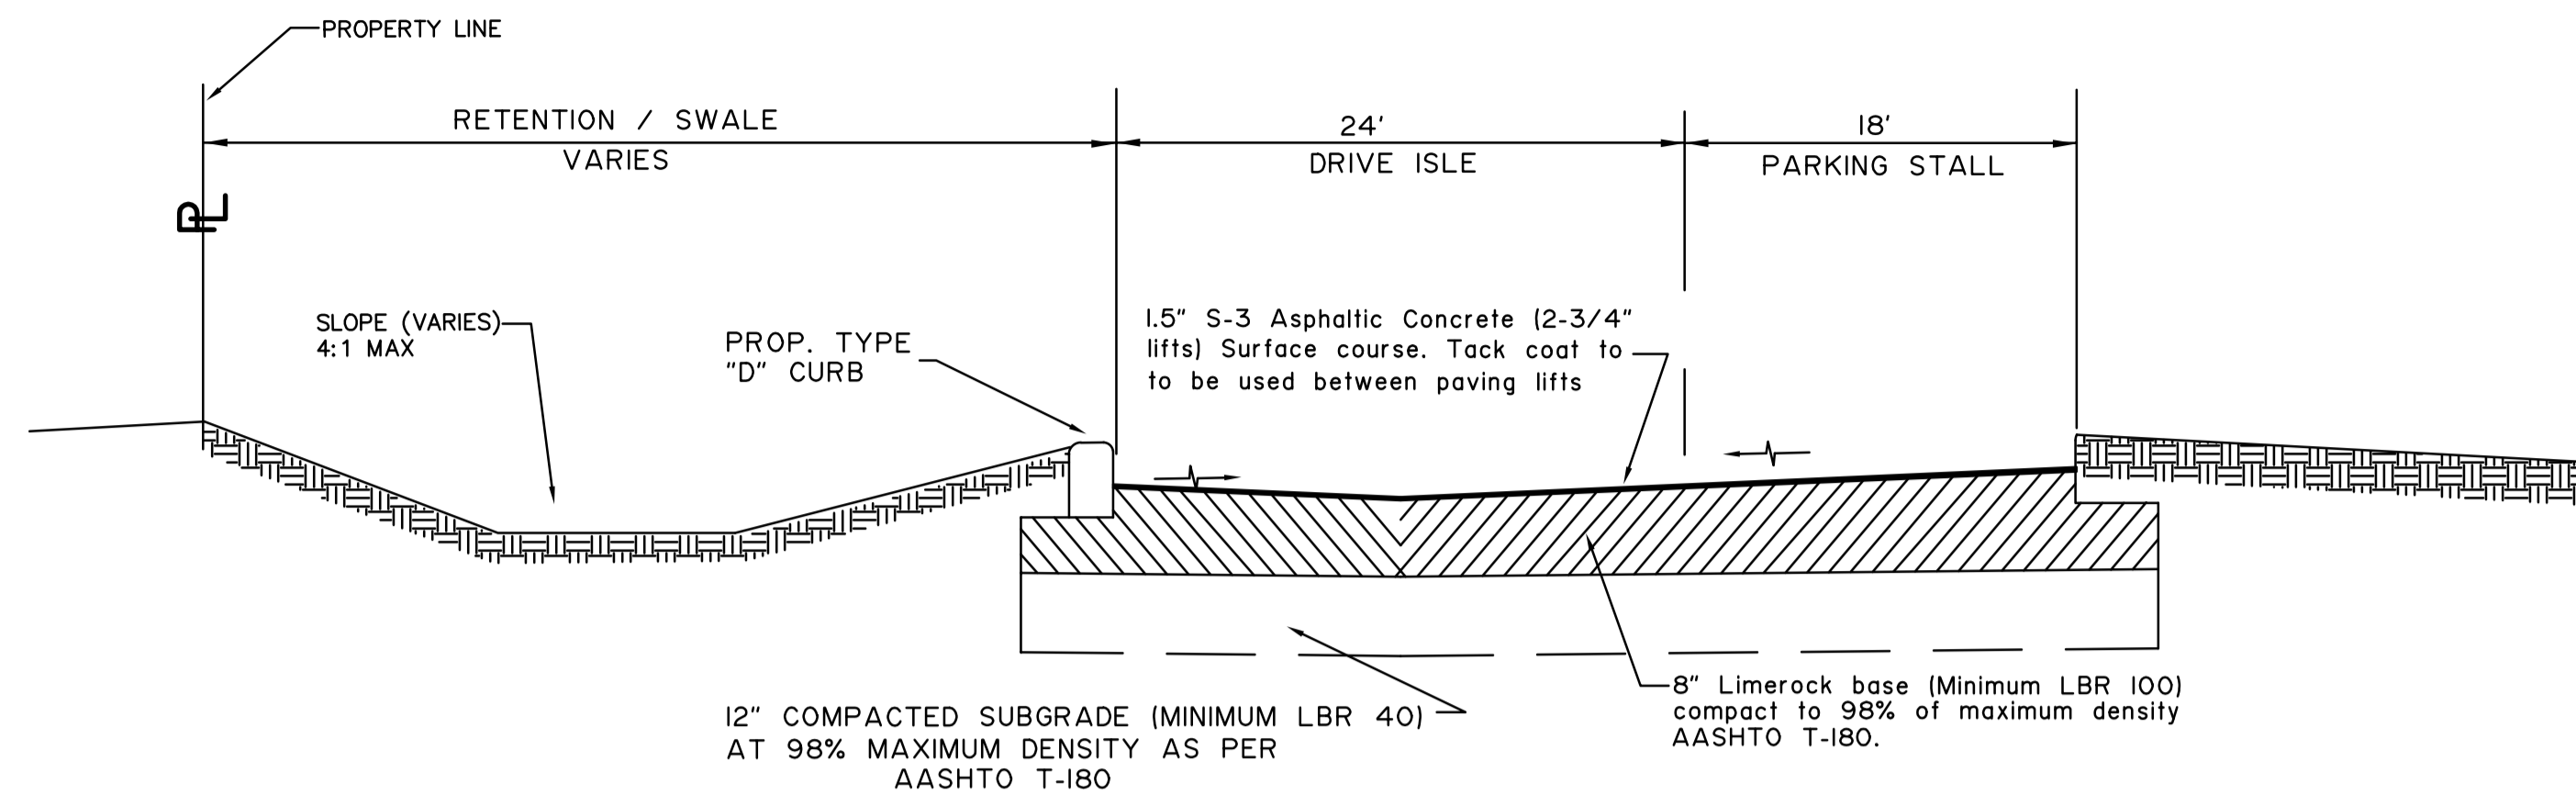




SECTION "A-A"

SCALE: N.T.S.

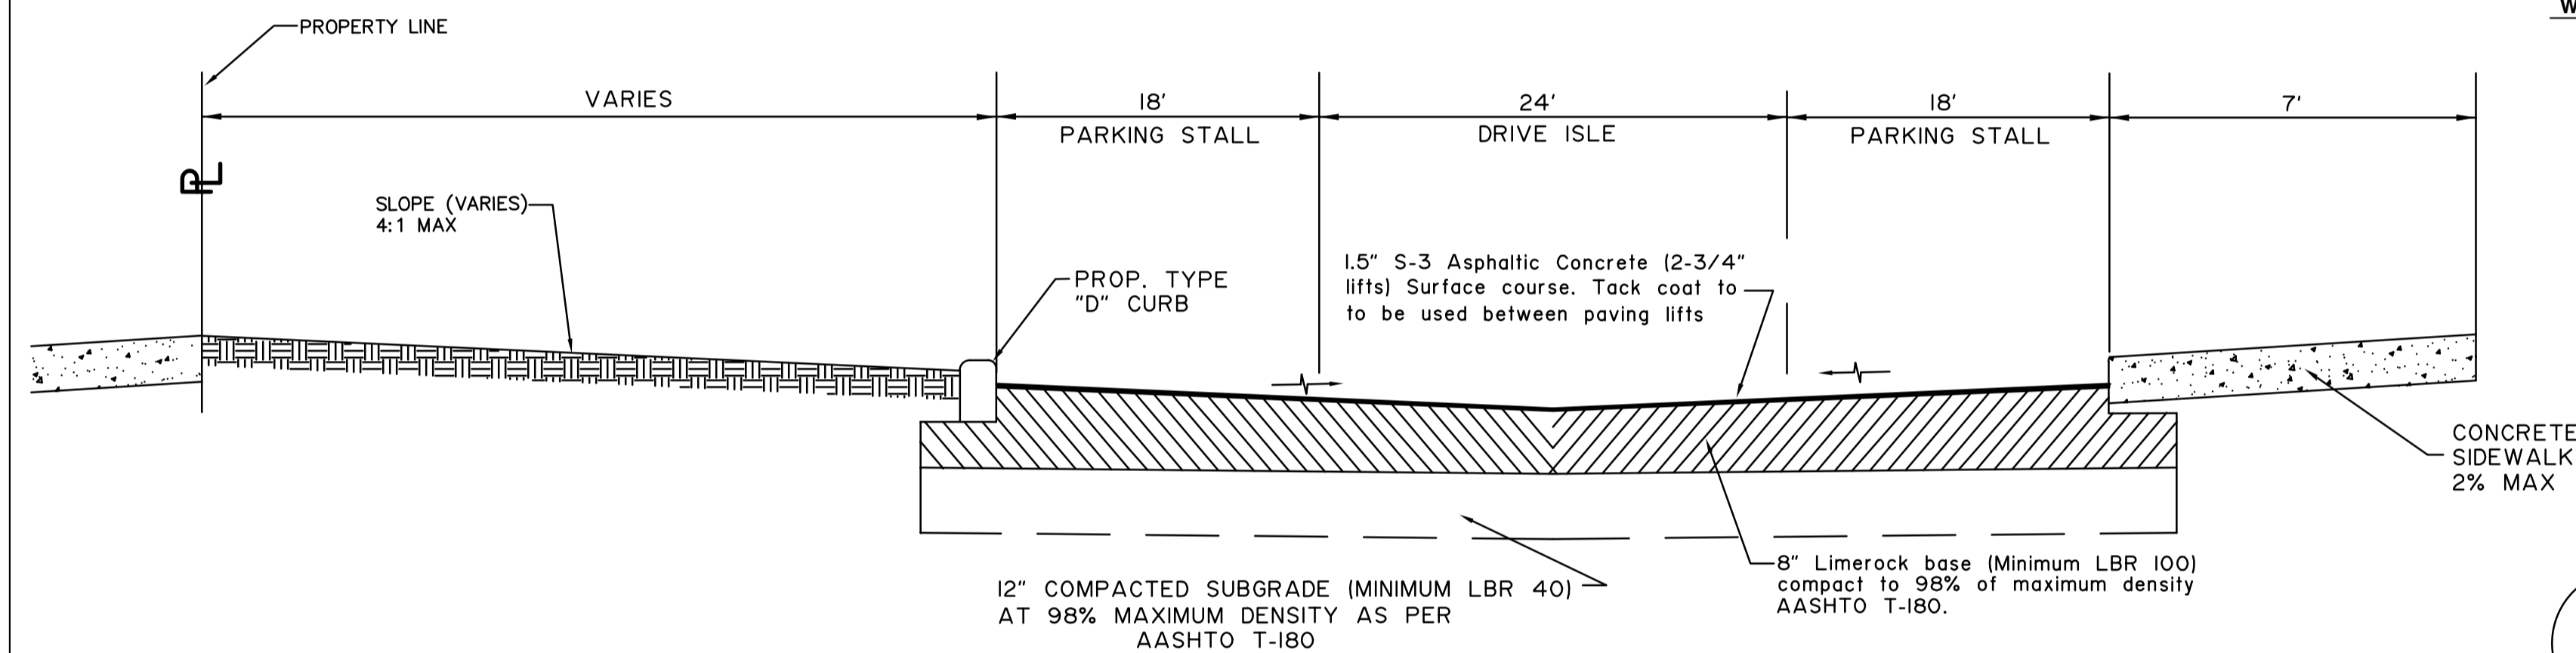

SECTION "B-B"









SCALE: N.T.S.

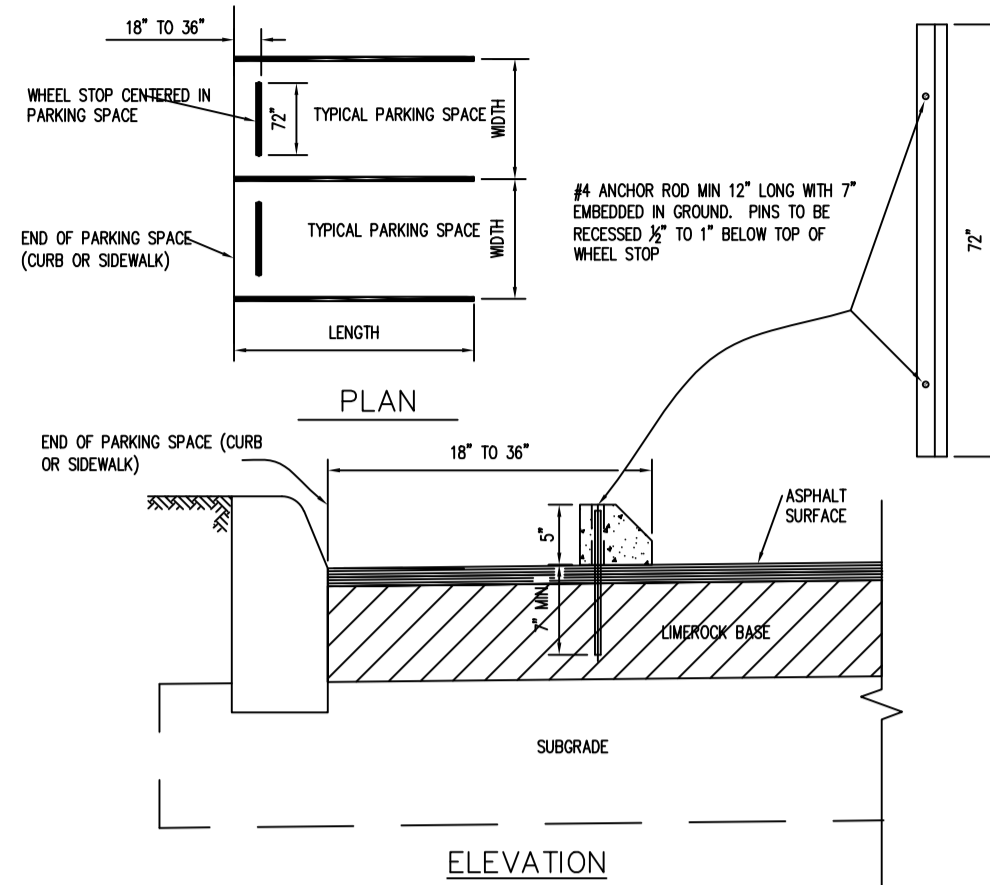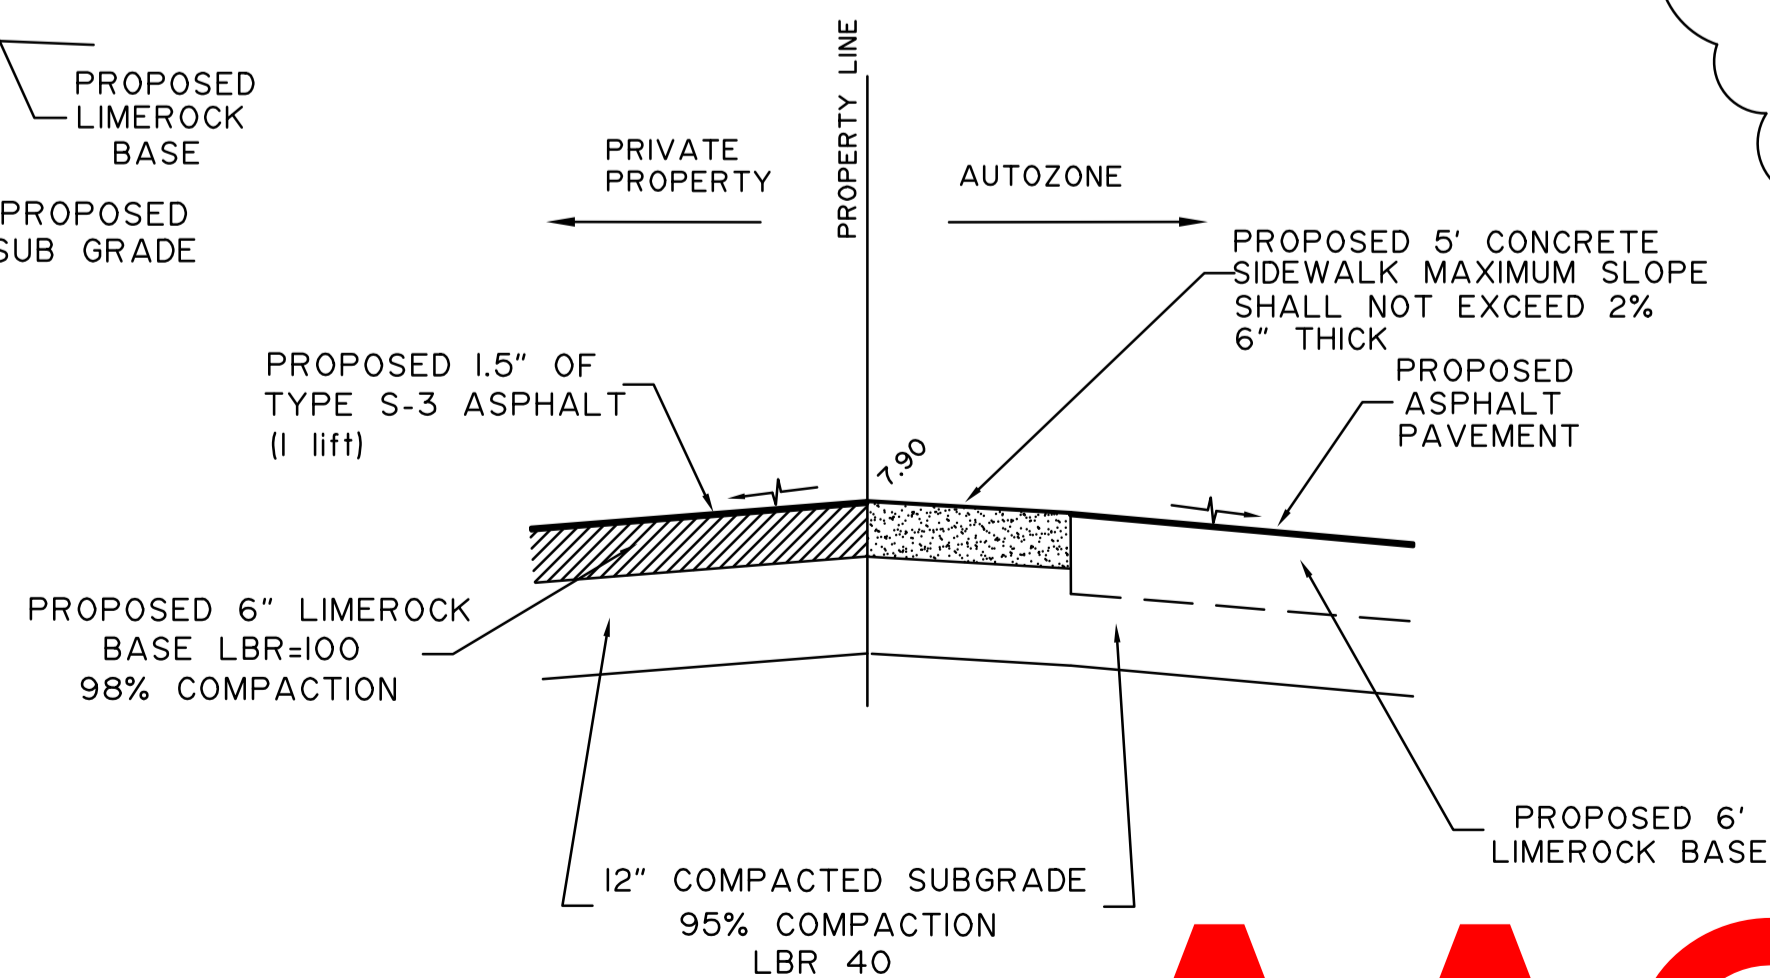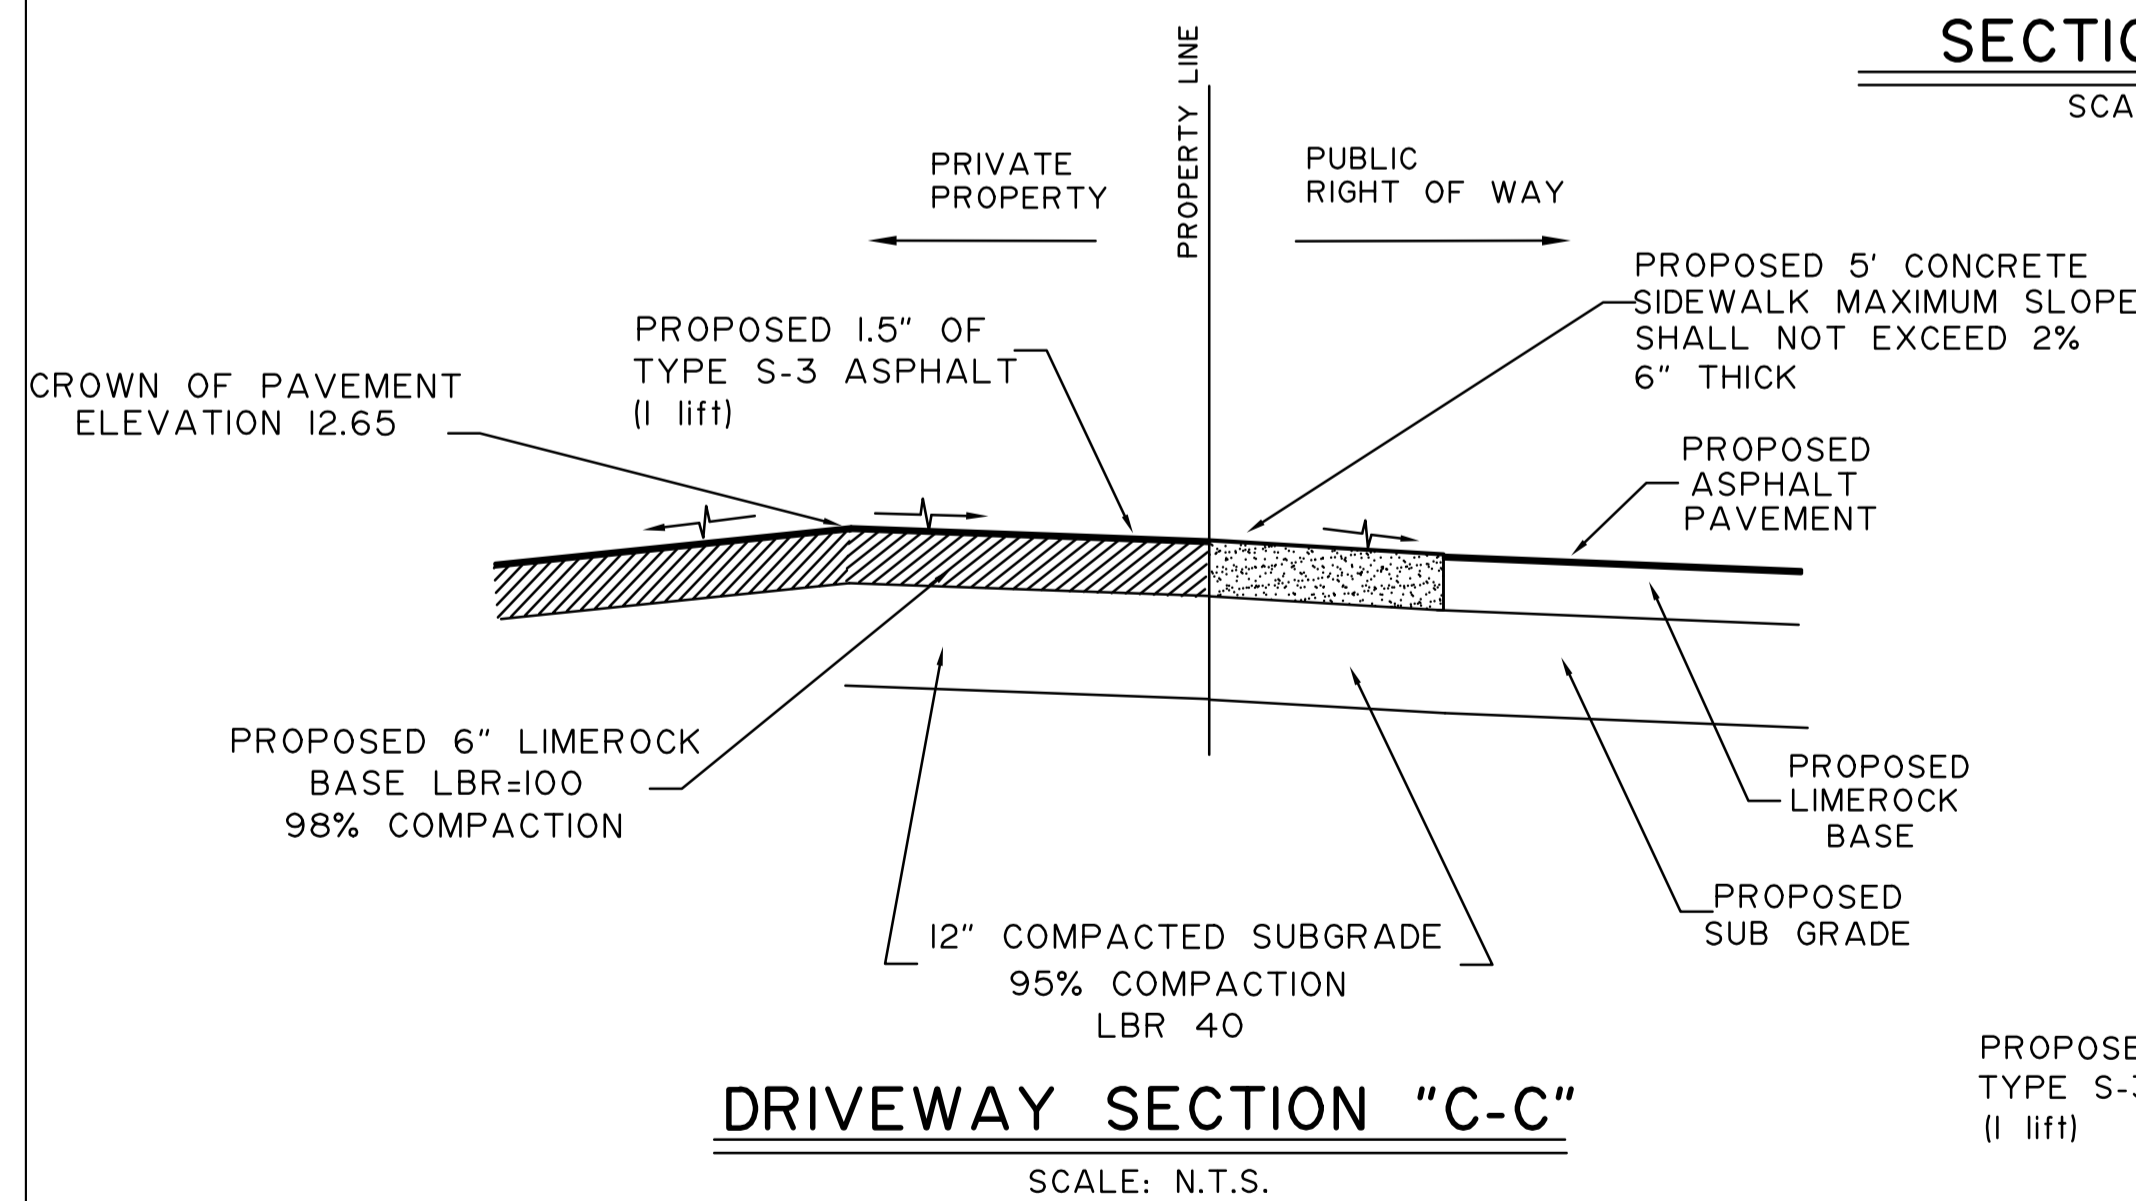


NOTES:

1. WHEELSTOP SIZES MAY VARY DEPENDING ON MANUFACTURER.
2. WHEELSTOPS SHALL BE UNPAINTED OR PAINTED WHITE OR YELLOW EXCEPT AT HANDICAP SPACES WHICH SHALL IN ALL CASES BE UNPAINTED.
3. ANCHOR RODS SHALL BE MINIMUM OF #4 REBAR, 12" LONG WITH 7" MINIMUM EMBEDMENT.
4. IN PAVEMENT AREAS THE ANCHOR RODS SHALL BE A MINIMUM OF 18" LONG. HOLES SHALL BE PRE-DRILLED.
5. WHEELSTOPS ARE REQUIRED ON ALL ANGLED PARKING SPACES (EXCEPT PARALLEL SPACES) AND ALL PARKING SPACES LESS THAN 20 FEET IN LENGTH.
6. DISTANCE FROM END OF PARKING TO FACE OF WHEELSTOP SHALL BE THE SAME THROUGHOUT THE PROJECT.

WHEELSTOP DETAIL

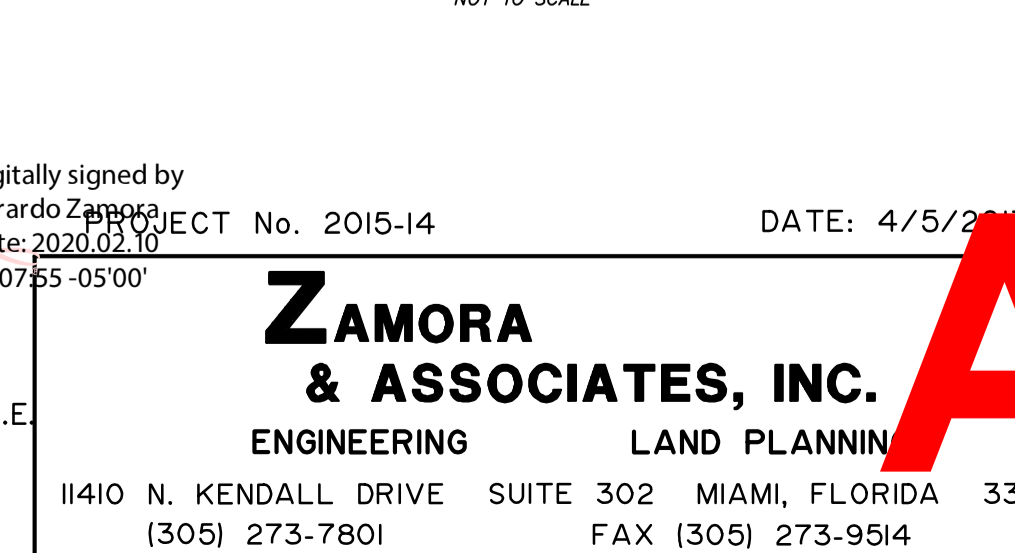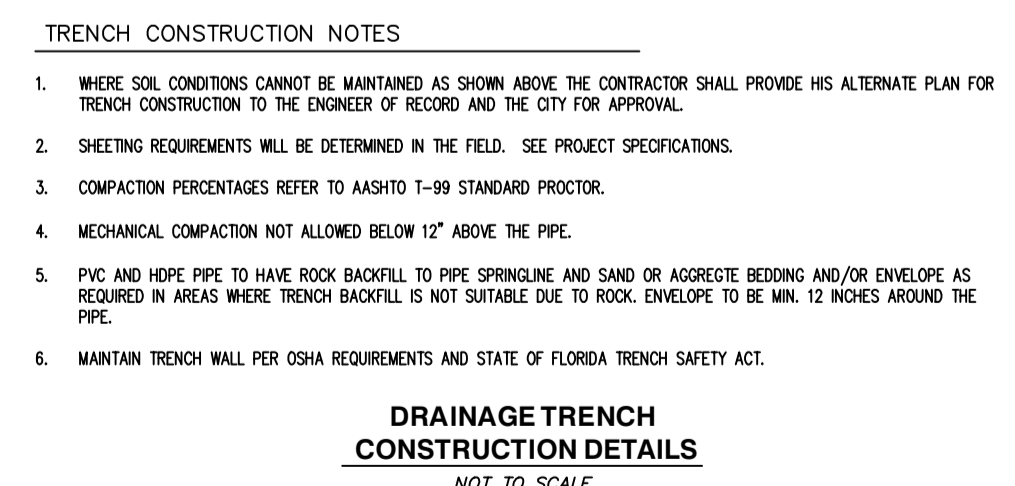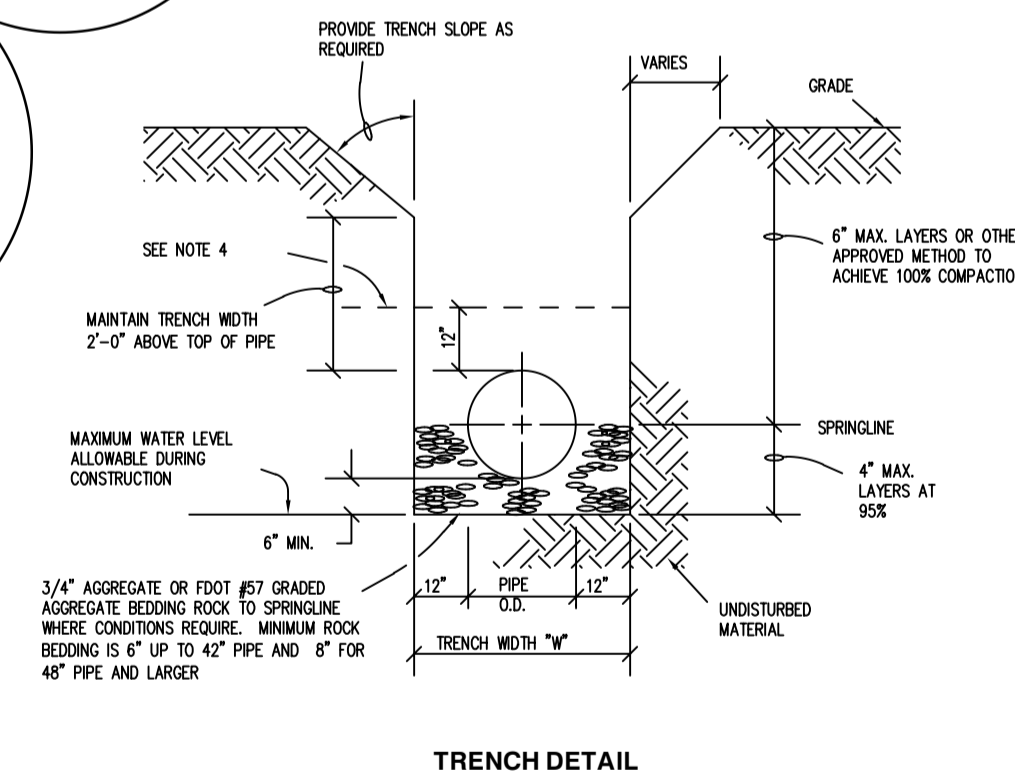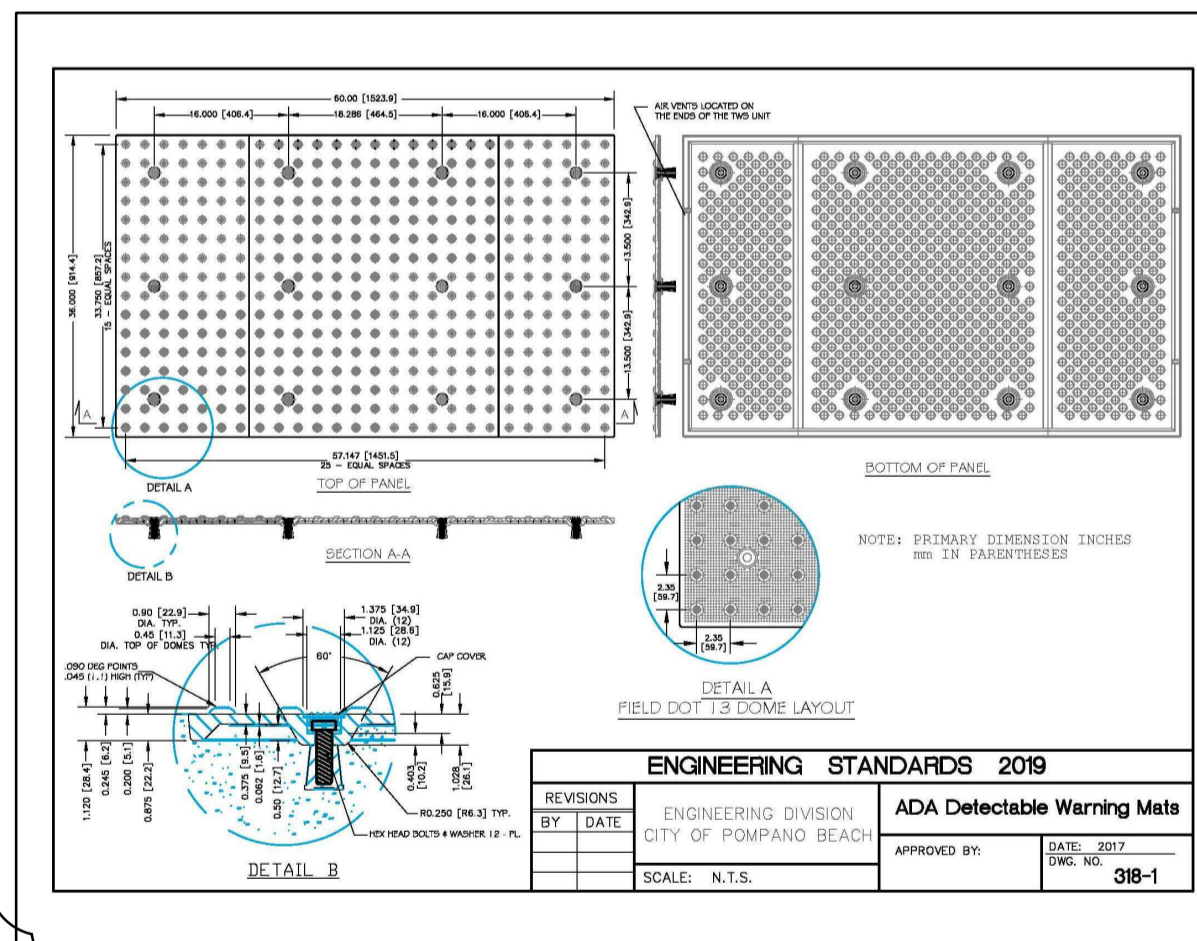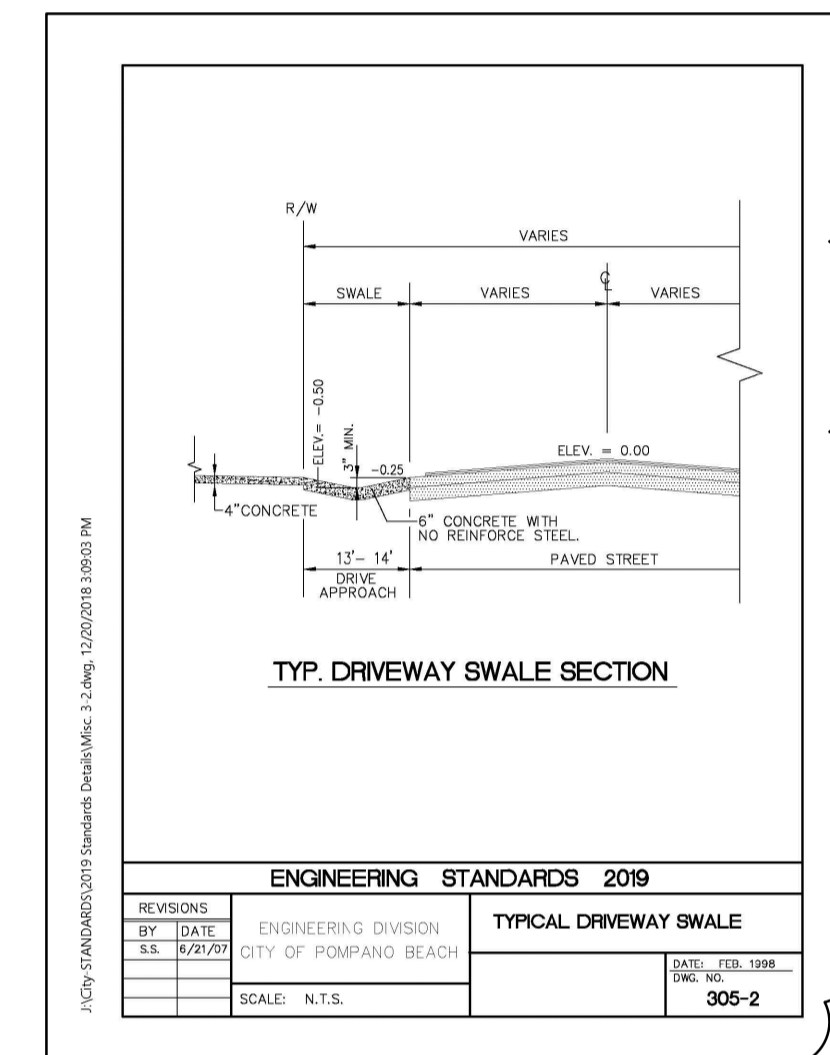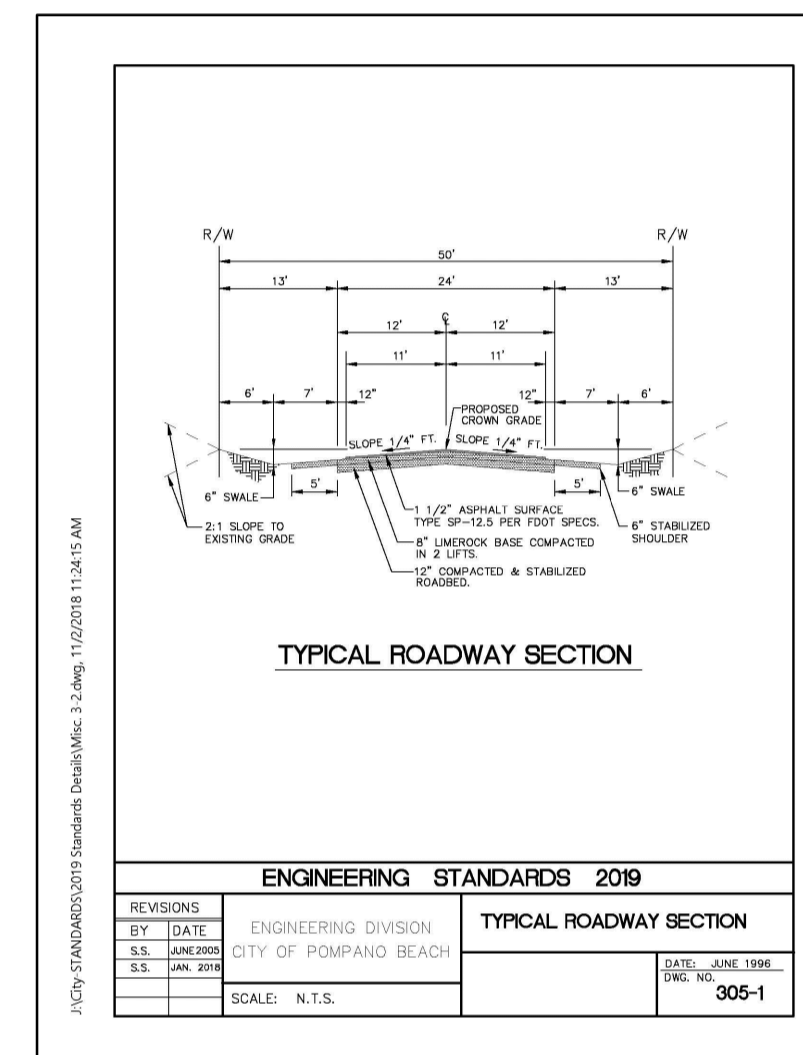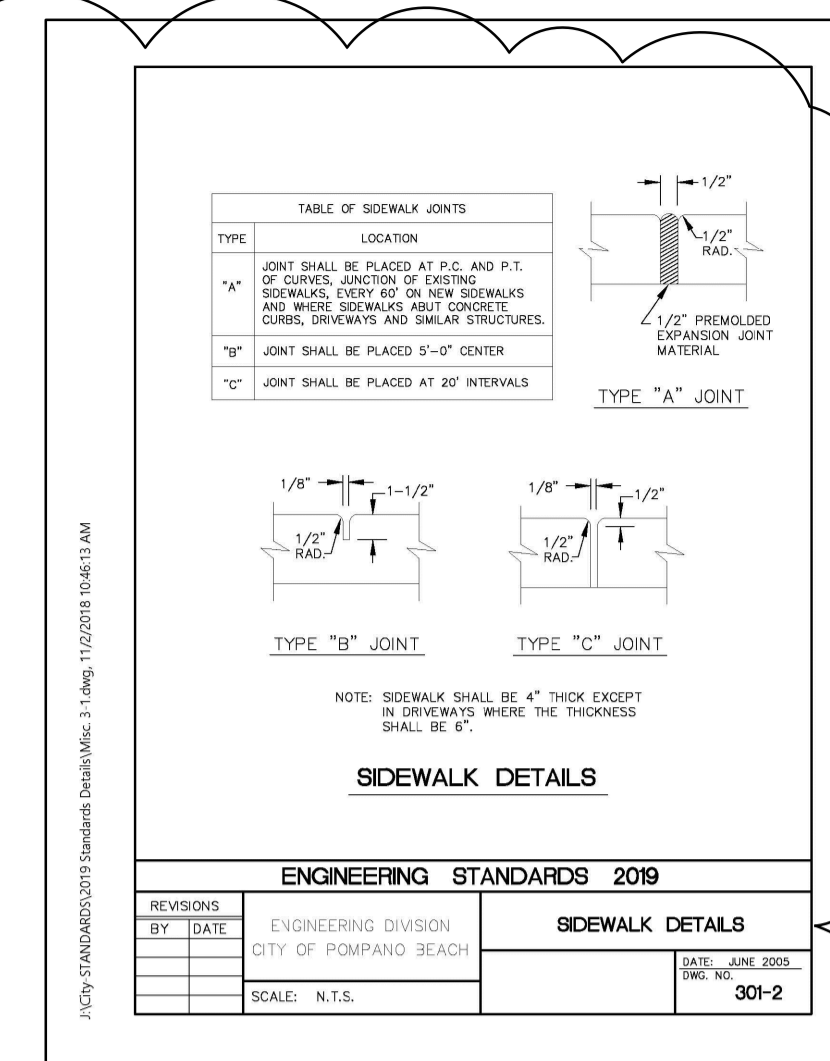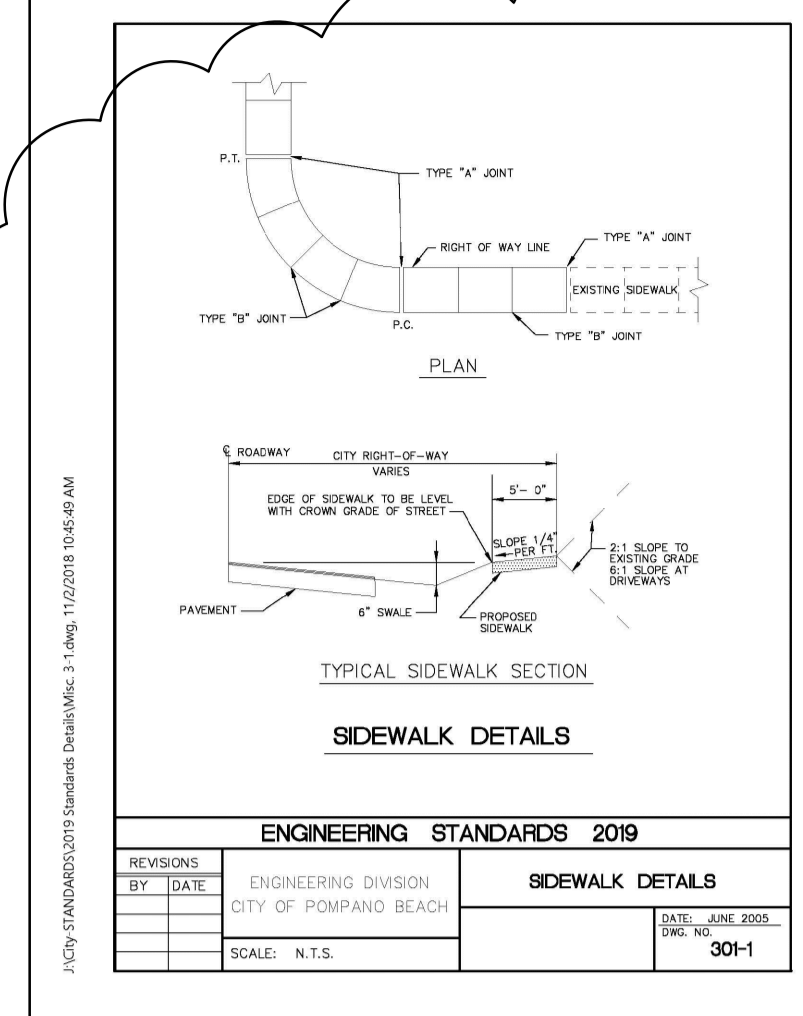

OWNER:
AutoZone, Inc.
123 S. FRONT STREET, 3rd FLOOR
MEMPHIS, TENNESSEE 38103



PREPARED FOR: **AutoZone STORE DEVELOPMENT**
Store No.: 6365
3001 W. Atlantic Avenue
Pompano Beach, FL 33069

SCALE: 1" = 20'-0"

REVISIONS

1.	1/5/18	COORDINATION
2.	2/7/20	CITY COMMENTS
3.		
4.		
5.		
6.		
7.		
ARCHITECT:		
DRAFTSMAN: CEH		
CHECKED BY:		
DATE		11/17/15
PROTOTYPE SIZE		

AAC
PZ20-12000007
2/2/21

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY GERARDO ZAMORA JR. P.E. ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED & SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Gerardo Zamora
P.E. No. 44207
E.B. 0006791
STATE OF FLORIDA

Gerardo Zamora
P.E. No. 44207
E.B. 0006791
STATE OF FLORIDA

AAC
PZ20-12000007
03/03/2020