







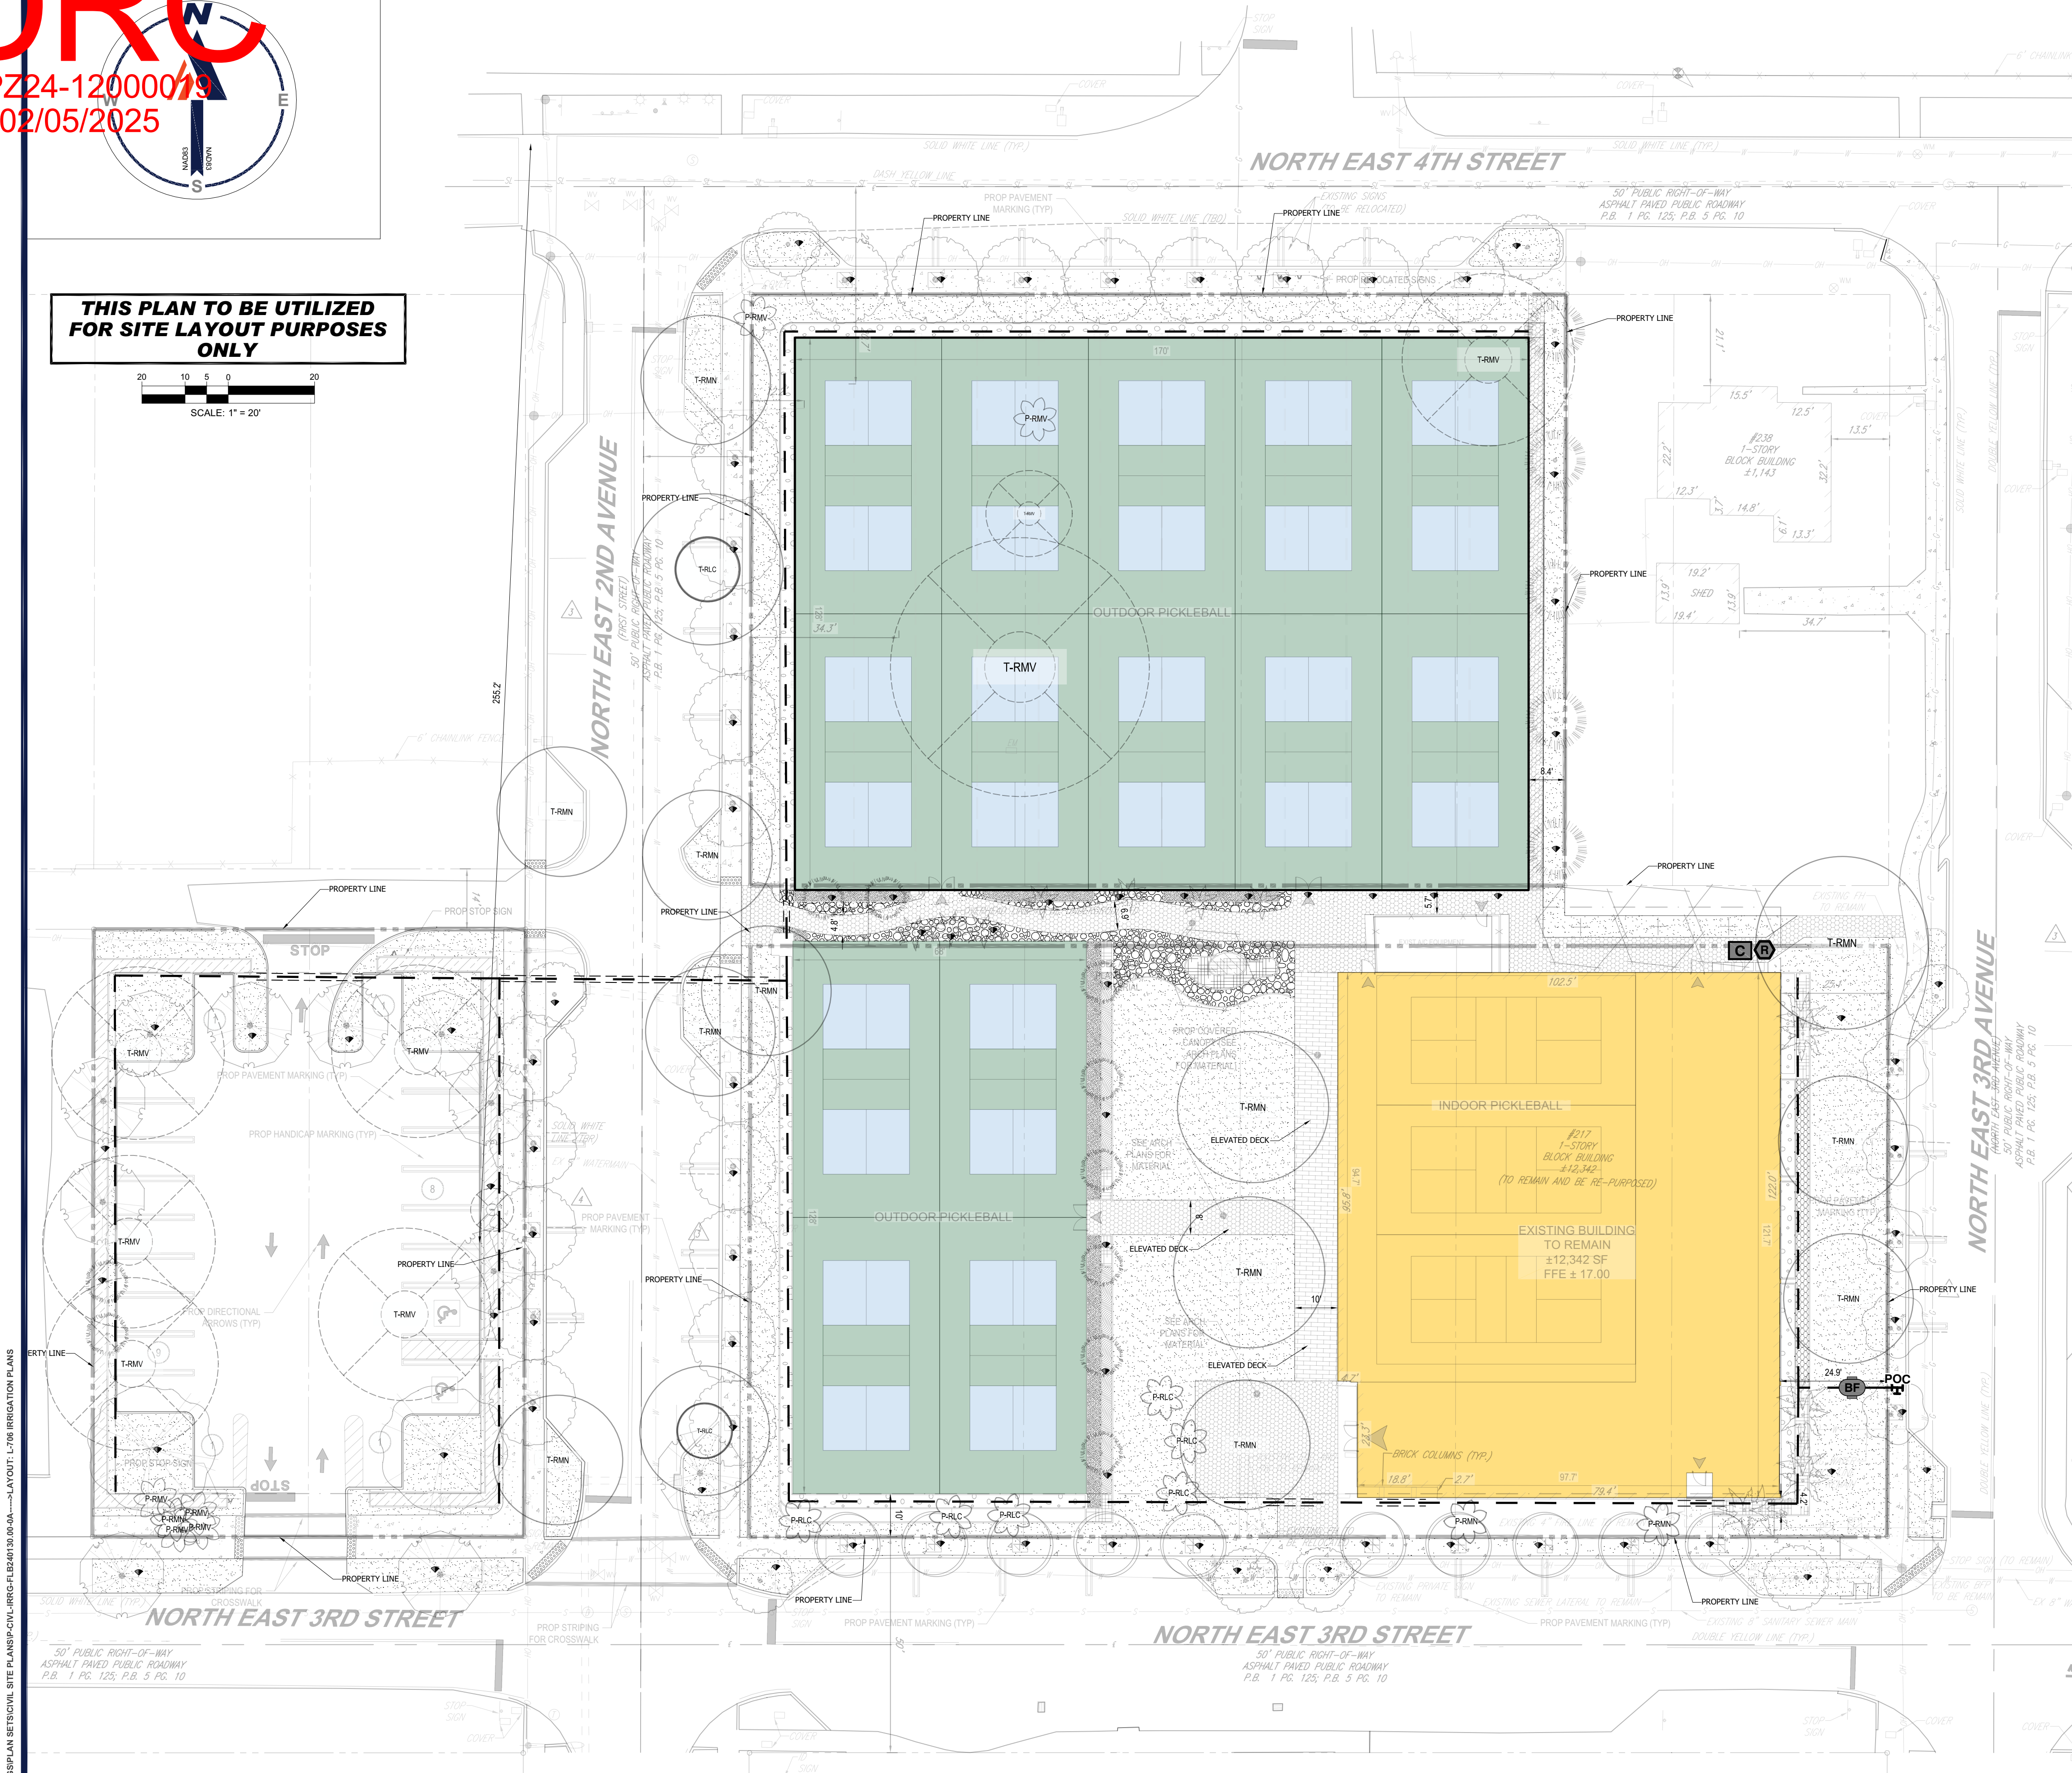




**THIS PLAN TO BE UTILIZED
FOR SITE LAYOUT PURPOSES
ONLY**



IRRIGATION SCHEDULE

<u>SYMBOL</u>	<u>MANUFACTURER/MODEL/DESCRIPTION</u>	<u>QTY</u>	<u>PSI</u>	<u>DETAIL</u>
	RAIN BIRD 1806-1400 FLOOD FLOOD BUBBLER 6.0N. POPUP	85	20	
<u>SYMBOL</u>	<u>MANUFACTURER/MODEL/DESCRIPTION</u>	<u>QTY</u>		<u>DETAIL</u>
	FEBO 765 1-1/2" PRESSURE VACUUM BREAKER, BRASS WITH BALL VALVE SOV. INSTALL 12IN. ABOVE HIGHEST DOWNSTREAM OUTLET AND THE HIGHEST POINT IN THE DOWNSTREAM PIPING.	1		
	RAIN BIRD ESP4M5 WITH (3) ESP-SM3 13 STATION, HYBRID MODULAR OUTDOOR CONTROLLER. FOR RESIDENTIAL OR LIGHT COMMERCIAL USE. LNK WIFI MODULE AND FLOW SENSOR READY.	1		
	RAIN BIRD RSD-BEX RAIN SENSOR, WITH METAL LATCHING BRACKET, EXTENSION WIRE.	1		
	POINT OF CONNECTION 3" WATER POINT OF CONNECTIONS	1		
	IRRIGATION MAINLINE: PVC SCHEDULE 40		1,219 L.F.	
	PIPE SLEEVE: PVC CLASS 200 SDR 21		118.7 L.F.	
	Valve Callout			
	Valve Number Valve Flow Valve Size			

REVISIONS

[illegible]

Call 811 or visit sunshine811.com two full business days before digging to have buried facilities located and marked.

Check positive response codes before you dig!

**ISSUED FOR MUNICIPAL &
AGENCY REVIEW & APPROVAL**

THIS DRAWING IS INTENDED FOR MUNICIPAL AND/OR AGENCY
VIEW AND APPROVAL. IT IS NOT INTENDED AS A CONSTRUCTION
DOCUMENT UNLESS INDICATED OTHERWISE.

PROJECT No.: FLB240130.00-0A
DRAWN BY: GD
CHECKED BY: BW
DATE: 09/11/2024
CAD I.D.: P-CIVL-IRRG

PROJECT:

PROP.
SITE PLAN
DOCUMENTS
— FOR —


**POMPANO
PICKLE, LLC**

PROPOSED DEVELOPMENT

10-217 NE 3RD STREET
POMPANO BEACH, FL
BROWARD COUNTY

BOHLER//

**1900 NW CORPORATE BOULEVARD
SUITE 101E
BOCA RATON, FLORIDA 33431**
Phone: (561) 571-0280
Fax: (561) 571-0281
FLORIDA BUSINESS CERT. OF AUTH. No. 30780



THIS ITEM HAS BEEN DIGITALLY SIGNED AND
SEALED BY BRETT MICHAEL WALDMAN, PLA, ON
THE DATE ADJACENT TO THE SEAL. PRINTED
COPIES OF THIS DOCUMENT ARE NOT CONSIDERED
SIGNED AND SEALED AND THE SIGNATURE MUST
BE VERIFIED ON ANY ELECTRONIC COPIES.

SHEET TITLE:

IRRIGATION PLAN

SHEET NUMBER:

L-706

ORG. DATE - 09/11/2024