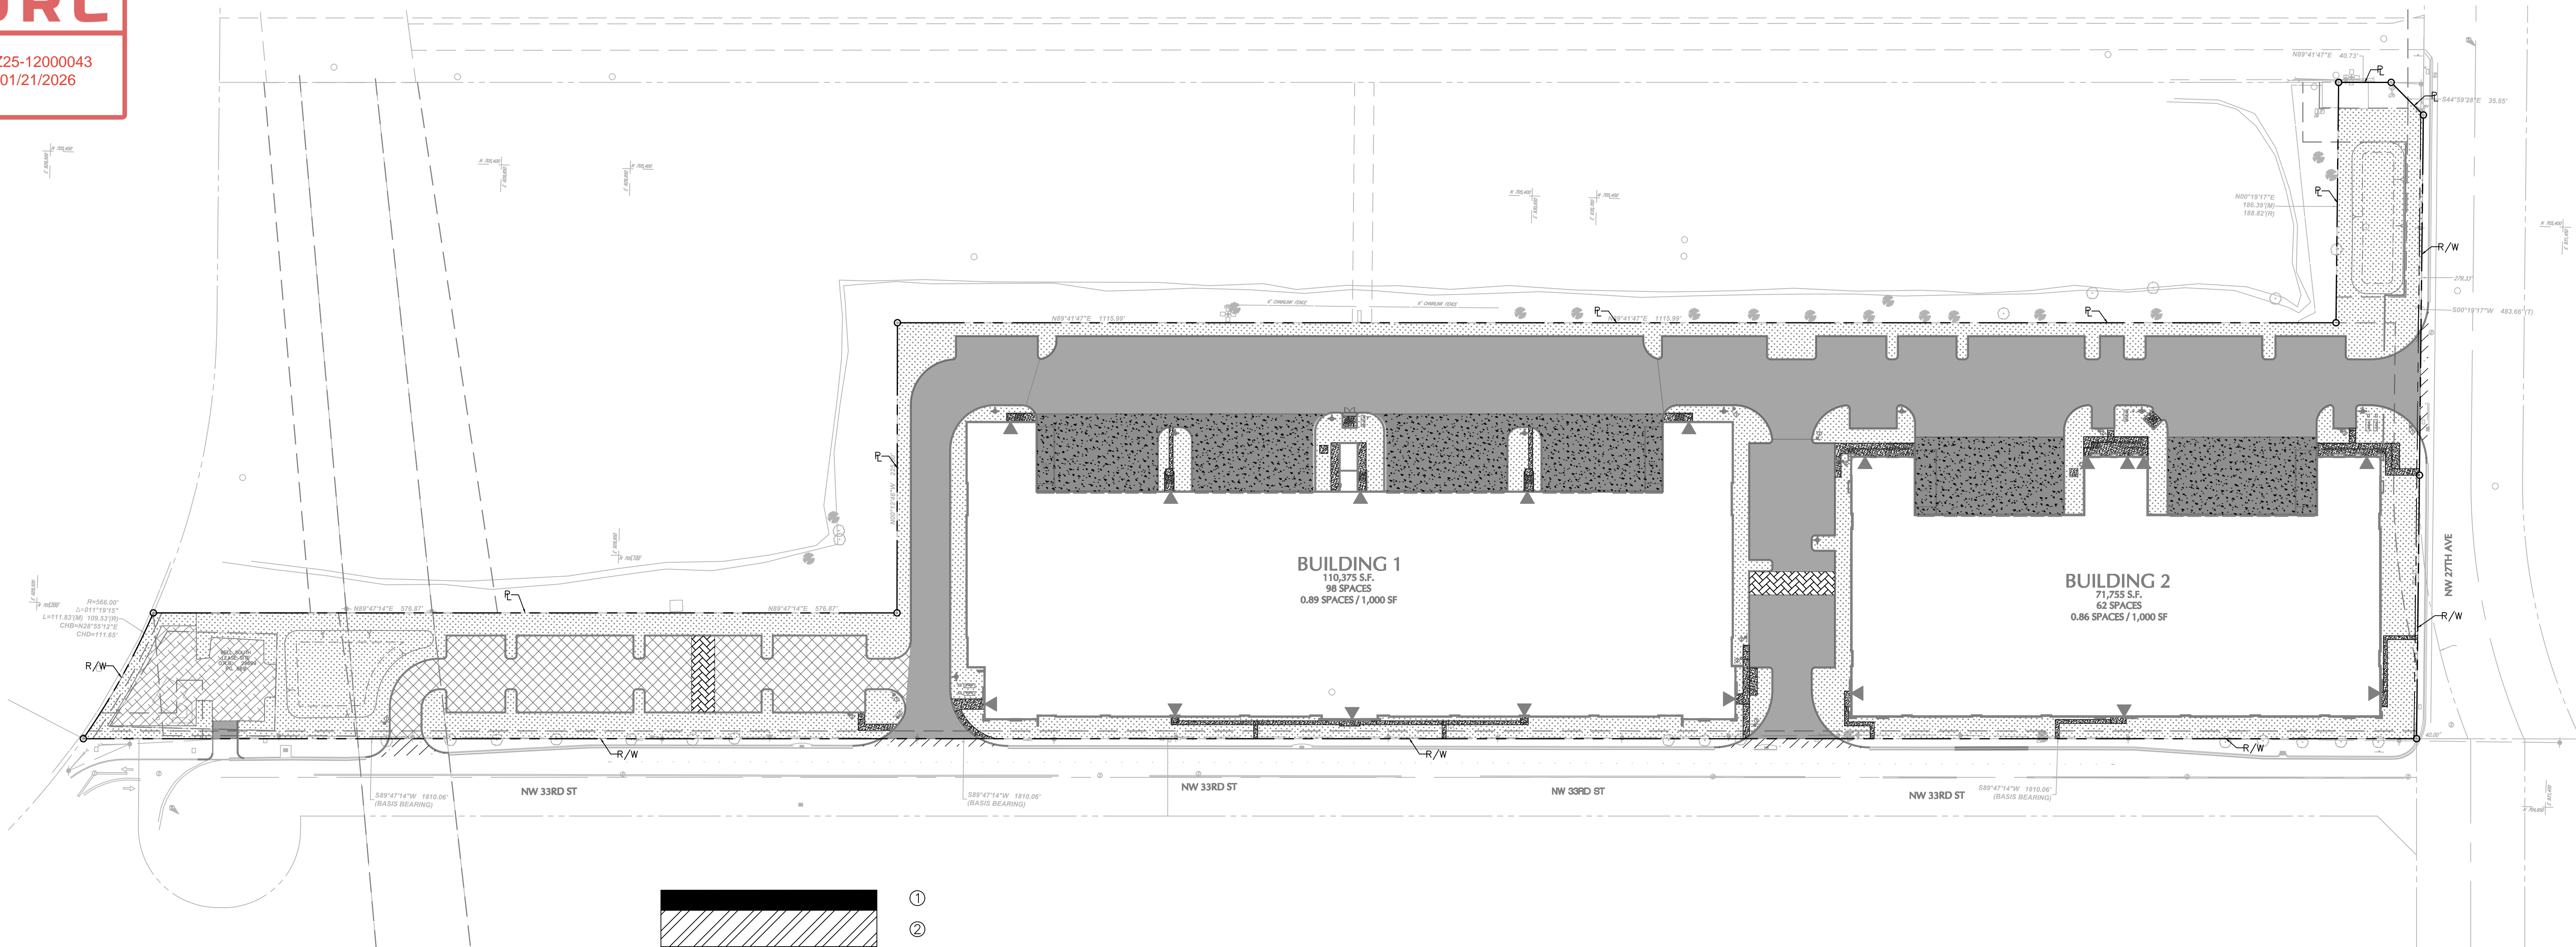



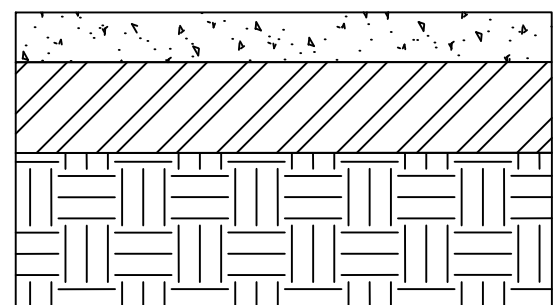
A  
B  
C  
D  
E  
F

## ON-SITE CONCRETE SIDEWALK




1. ALL SIDEWALKS WITHIN THE PROJECT SITE OUTSIDE OF VEHICULAR PATHWAYS SHALL BE 4" THICK CONCRETE WITH BROOM FINISH.
2. ALL SIDEWALKS WITHIN VEHICULAR PATHWAYS SHALL BE 6" THICK CONCRETE WITH BROOM FINISH.
3. CONTRACTOR SHALL REFER TO LANDSCAPE PLANS FOR LIMITS OF CONCRETE COLORING AND STAMPING.

## ON-SITE CONCRETE SIDEWALK

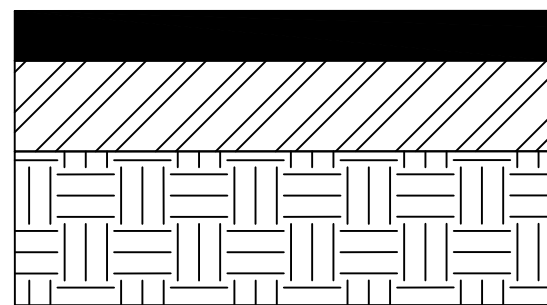
①  
②  
③

## HEAVY DUTY CONCRETE PAVEMENT



1. 6" 4,000 PSI CONCRETE REINFORCED WITH #3 BAR @16" ON-CENTER EACH WAY AND WITH SYNTHETIC MICROFIBERS @ 7.5 LBS/CY
2. 8" LIMEROCK BASE MIN. LBR 100, COMPACTED 98% MAX. DENSITY PER AASHTO T-180
3. 12" STABILIZED SUBGRADE MIN. LBR 40, COMPACTED TO 58% MAX. DENSITY PER AASHTO T-180

## HEAVY DUTY CONCRETE PAVEMENT

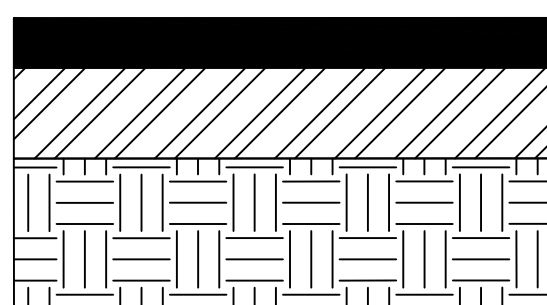
①  
②  
③

## LIGHT DUTY ASPHALT



1. 1.5" FC-9.5 OR FC-12.5 SURFACE COURSE
2. 6" LIMEROCK BASE MIN. LBR 100, COMPACTED 98% MAX. DENSITY PER AASHTO T-180
3. 12" STABILIZED SUBGRADE MIN. LBR 40, COMPACTED TO 98% MAX. DENSITY PER AASHTO T-180

## LIGHT DUTY ASPHALT PAVEMENT

①  
②  
③


## HEAVY DUTY ASPHALT




1. 2" FC-9.5 OR FC-12.5 SURFACE COURSE
2. 8" LIMEROCK BASE MIN. LBR 100, COMPACTED 98% MAX. DENSITY PER AASHTO T-180
3. 12" STABILIZED SUBGRADE MIN. LBR 40, COMPACTED TO 98% MAX. DENSITY PER AASHTO T-180

## HEAVY DUTY ASPHALT PAVEMENT

## EXISTING ASPHALT TO BE MILLED AND RESURFACED

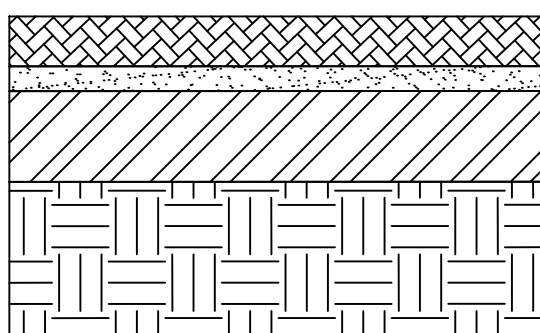


## PROPOSED ROW PAVEMENT



1. CONTRACTOR SHALL MATCH EXISTING PAVEMENT PER FDOT STANDARDS SPECIFICATIONS.

## PROPOSED ROW PAVEMENT

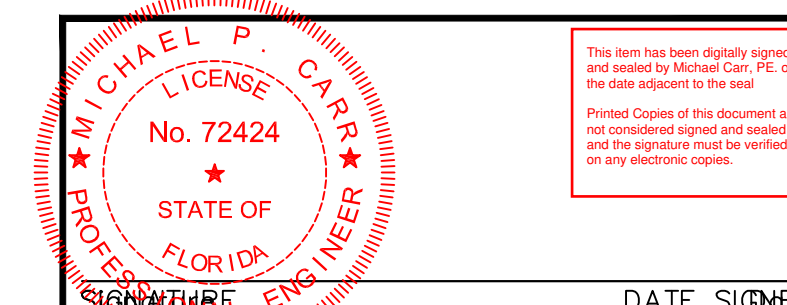
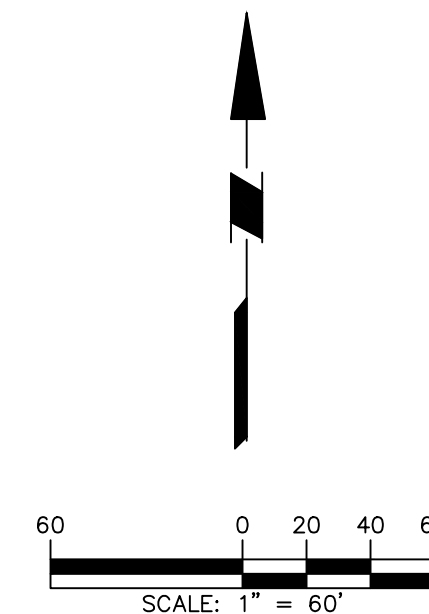
①  
②  
③  
④

## PROPOSED PAVERS



1. 4" TRAFFIC RATED PAVERS
2. 1" BEDDING SAND
3. 8" LIMEROCK BASE MIN. LBR 100, COMPACTED 98% MAX. DENSITY PER AASHTO T-180
4. 12" STABILIZED SUBGRADE MIN. LBR 40, COMPACTED TO 98% MAX. DENSITY PER AASHTO T-180

## PROPOSED TRAFFIC RATED PAVERS

MICHAEL CARR  
PROFESSIONAL ENGINEER FL Lic. No. 72424**LANGAN**  
Langan Engineering and  
Environmental Services, LLC.110 East Broward Boulevard, Suite 1500  
Fort Lauderdale, FL 33301T: 954.320.2100 F: 954.320.2101 www.langan.com  
FBPE REGISTRY NO. 65011.B8172L.B8198

Project

FESTIVAL SOUTH

NW 33RD ST  
POMPAÑO BEACH

BROWARD COUNTY FLORIDA

Drawing Title

PAVEMENT PLAN

Project No.

330134202

Date

DECEMBER 2025

Drawn By

DMP

Checked By

CL

Drawing No.

C-3.0

Date	Description	No.
Revisions		