




NOTE
Underground utility information is taken from the best available sources, but should be verified by contractor in the field with the appropriate utility agency prior to commencement of any work.

Existing utility lines other than those indicated in this drawing may be on site. The contractor is warned to proceed with caution with all work. He is to make all possible investigation as to possible unmarked utility lines.

UTILITY PLAN

NOTE:
CONTRACTOR TO VERIFY AND COORDINATE THE TELEPHONE AND ELECTRIC CONNECTIONS WITH UTILITY COMPANY PRIOR TO CONSTRUCTION

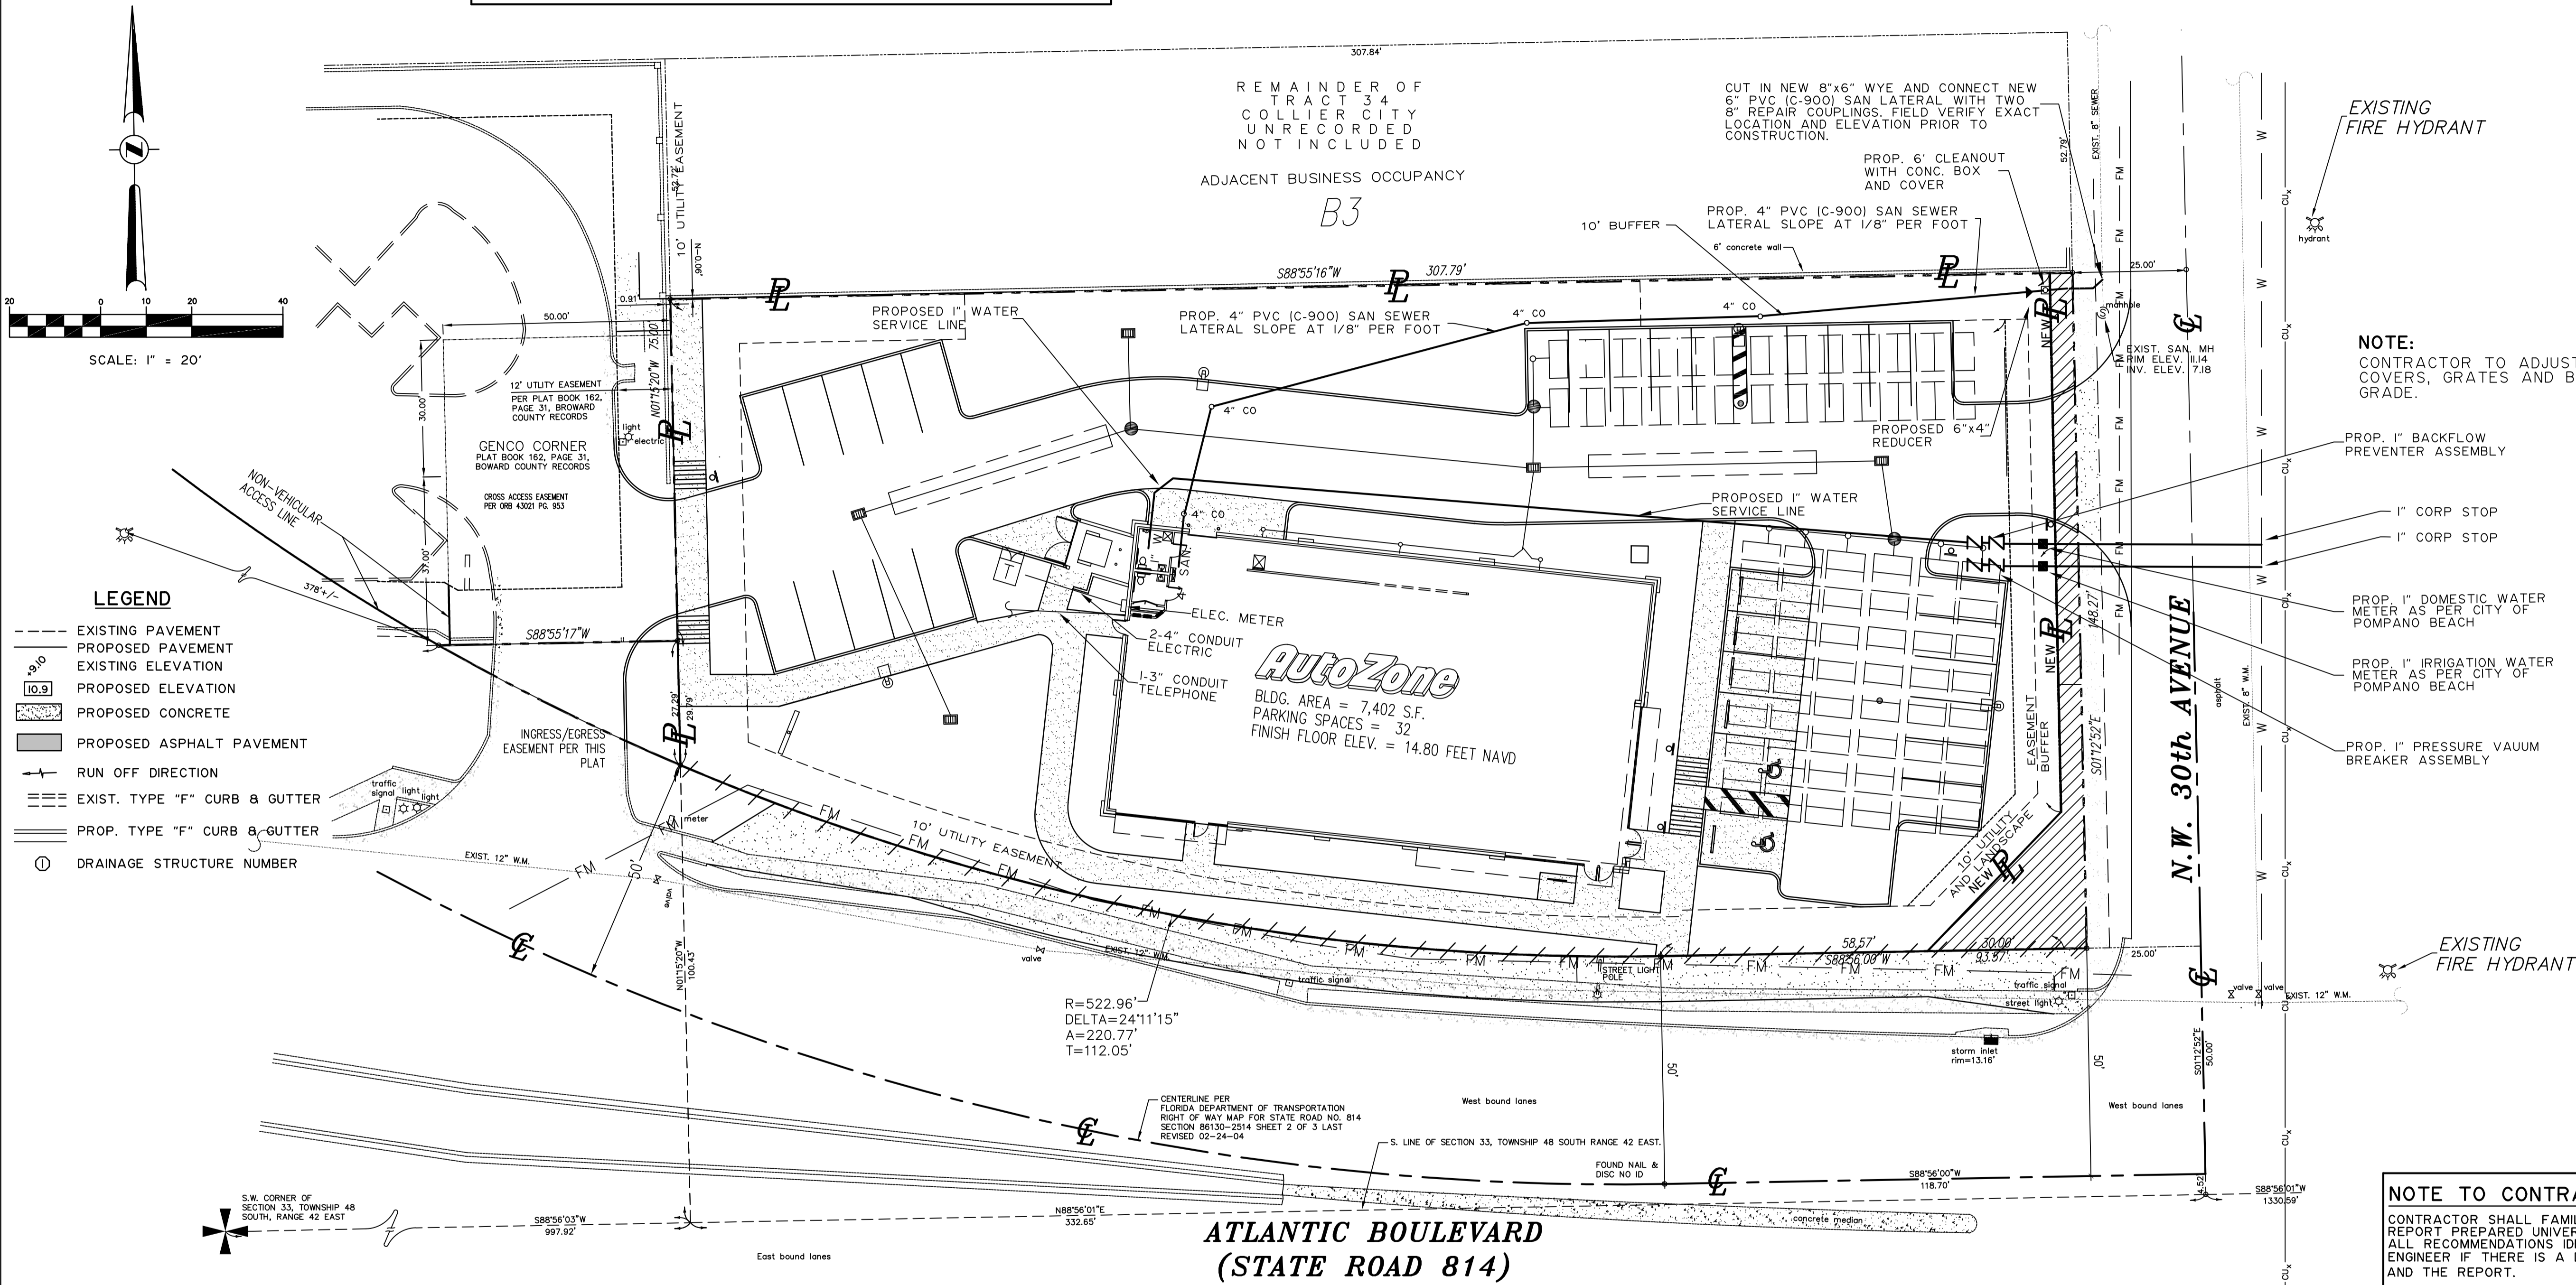

NOTE:
CONTRACTOR TO ADJUST UTILITY MANHOLE COVERS, GRATES AND BOXES TO NEW FINISHED GRADE.

- EXISTING FIRE HYDRANT
- PROPOSED 1" BACKFLOW PREVENTER ASSEMBLY
- 1" CORP STOP
- 1" CORP STOP
- PROPOSED 1" DOMESTIC WATER METER AS PER CITY OF POMPANO BEACH
- PROPOSED 1" IRRIGATION WATER METER AS PER CITY OF POMPANO BEACH
- PROPOSED 1" PRESSURE VAUUM BREAKER ASSEMBLY

EXISTING FIRE HYDRANT


NOTE TO CONTRACTOR
CONTRACTOR SHALL FAMILIARIZE HIMSELF WITH THE SOILS REPORT PREPARED UNIVERSAL SOILS AND SHALL IMPLEMENT ALL RECOMMENDATIONS IDENTIFIED. CONTRACTOR TO NOTIFY ENGINEER IF THERE IS A DISCREPANCY BETWEEN THE PLANS AND THE REPORT.

- GENERAL NOTES:**
- ALL MATERIALS AND LABOR UNDER THIS PROJECT SHALL CONFORM TO THE CITY OF POMPANO BEACH ENGINEERING DEPARTMENT AND FLORIDA BUILDING CODE STANDARDS AND SPECIFICATIONS.
 - EXISTING UTILITY LINES OTHER THAN THOSE INDICATED IN THIS DRAWING MAY BE ON SITE. THE CONTRACTOR IS WARNED TO PROCEED WITH CAUTION WITH ALL WORK. HE IS TO MAKE ALL POSSIBLE INVESTIGATION AS TO POSSIBLE UNMARKED UTILITY LINES.
 - ALL CLEANOUTS IN DRIVEWAY TO HAVE TRAFFIC BEARING CAP.
 - COORDINATE WATER AND SEWER WORK WITH MECHANICAL AND PLUMBING PLANS.
 - ANY UNUTILIZED CITY WATER AND/OR SEWER LINE TO LOT SHALL BE CUT AND PLUGGED AT THE SERVICE MAIN.

- UNDERGROUND CONTRACTOR:**
- Underground Contractor shall comply with the Trench Safety Act, HB 3183, Florida Statutes, which incorporates, but is not limited to, the following:
 - OSHA Standard 29 C.F.R. Part 1926, Subpart P, Excavation and Trenches.
 - Contract bids for trench excavations (in excess of 5 feet deep) shall include reference to the safety standards, written assurance of compliance, and a separate item identifying the cost of compliance.
 - Adhere to any special shoring requirements of the state or other political subdivision.
 - Engineer is not responsible for the safety of the excavation or design and construction of any shoring.

AAC
PZ20-12000007
2/2/21

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY GERARDO ZAMORA JR P.E. ON THE DATE ADJACENT TO THE SEAL.
PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED & SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

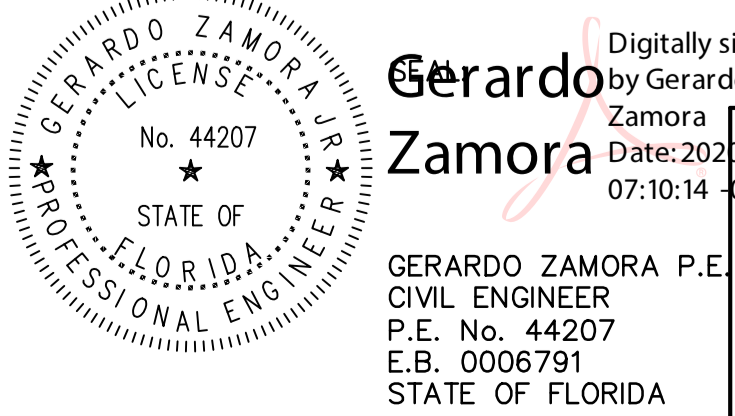

Digitally signed by Gerardo Zamora
Date: 2020.02.10 07:10:14 -0500
PROJECT No. 2015-14
DATE: 4/5/2015
ZAMORA & ASSOCIATES, INC.
ENGINEERING LAND PLANNING
11410 N. KENDALL DRIVE SUITE 302 MIAMI, FLORIDA 33176
(305) 273-7801 FAX (305) 273-9514

AAC
PZ20-12000007
03/03/2020

AutoZone, Inc.
123 S. FRONT STREET, 3rd FLOOR
MEMPHIS, TENNESSEE 38103

AutoZone STORE DEVELOPMENT
Store No.: 6365
3001 W. Atlantic Avenue
Pompano Beach, FL 33069

UTILITY PLAN

SCALE: 1" = 20'-0"

REVISIONS
1. 1/5/18 COORDINATION
2.
3.
4.
5.
6.
7.
ARCHITECT:
DRAFTSMAN: CEH
CHECKED BY:
DATE: 11/17/15
PROTOTYPE SIZE