


STATE ROAD NO. A-1-A  
OCEAN BOULEVARD

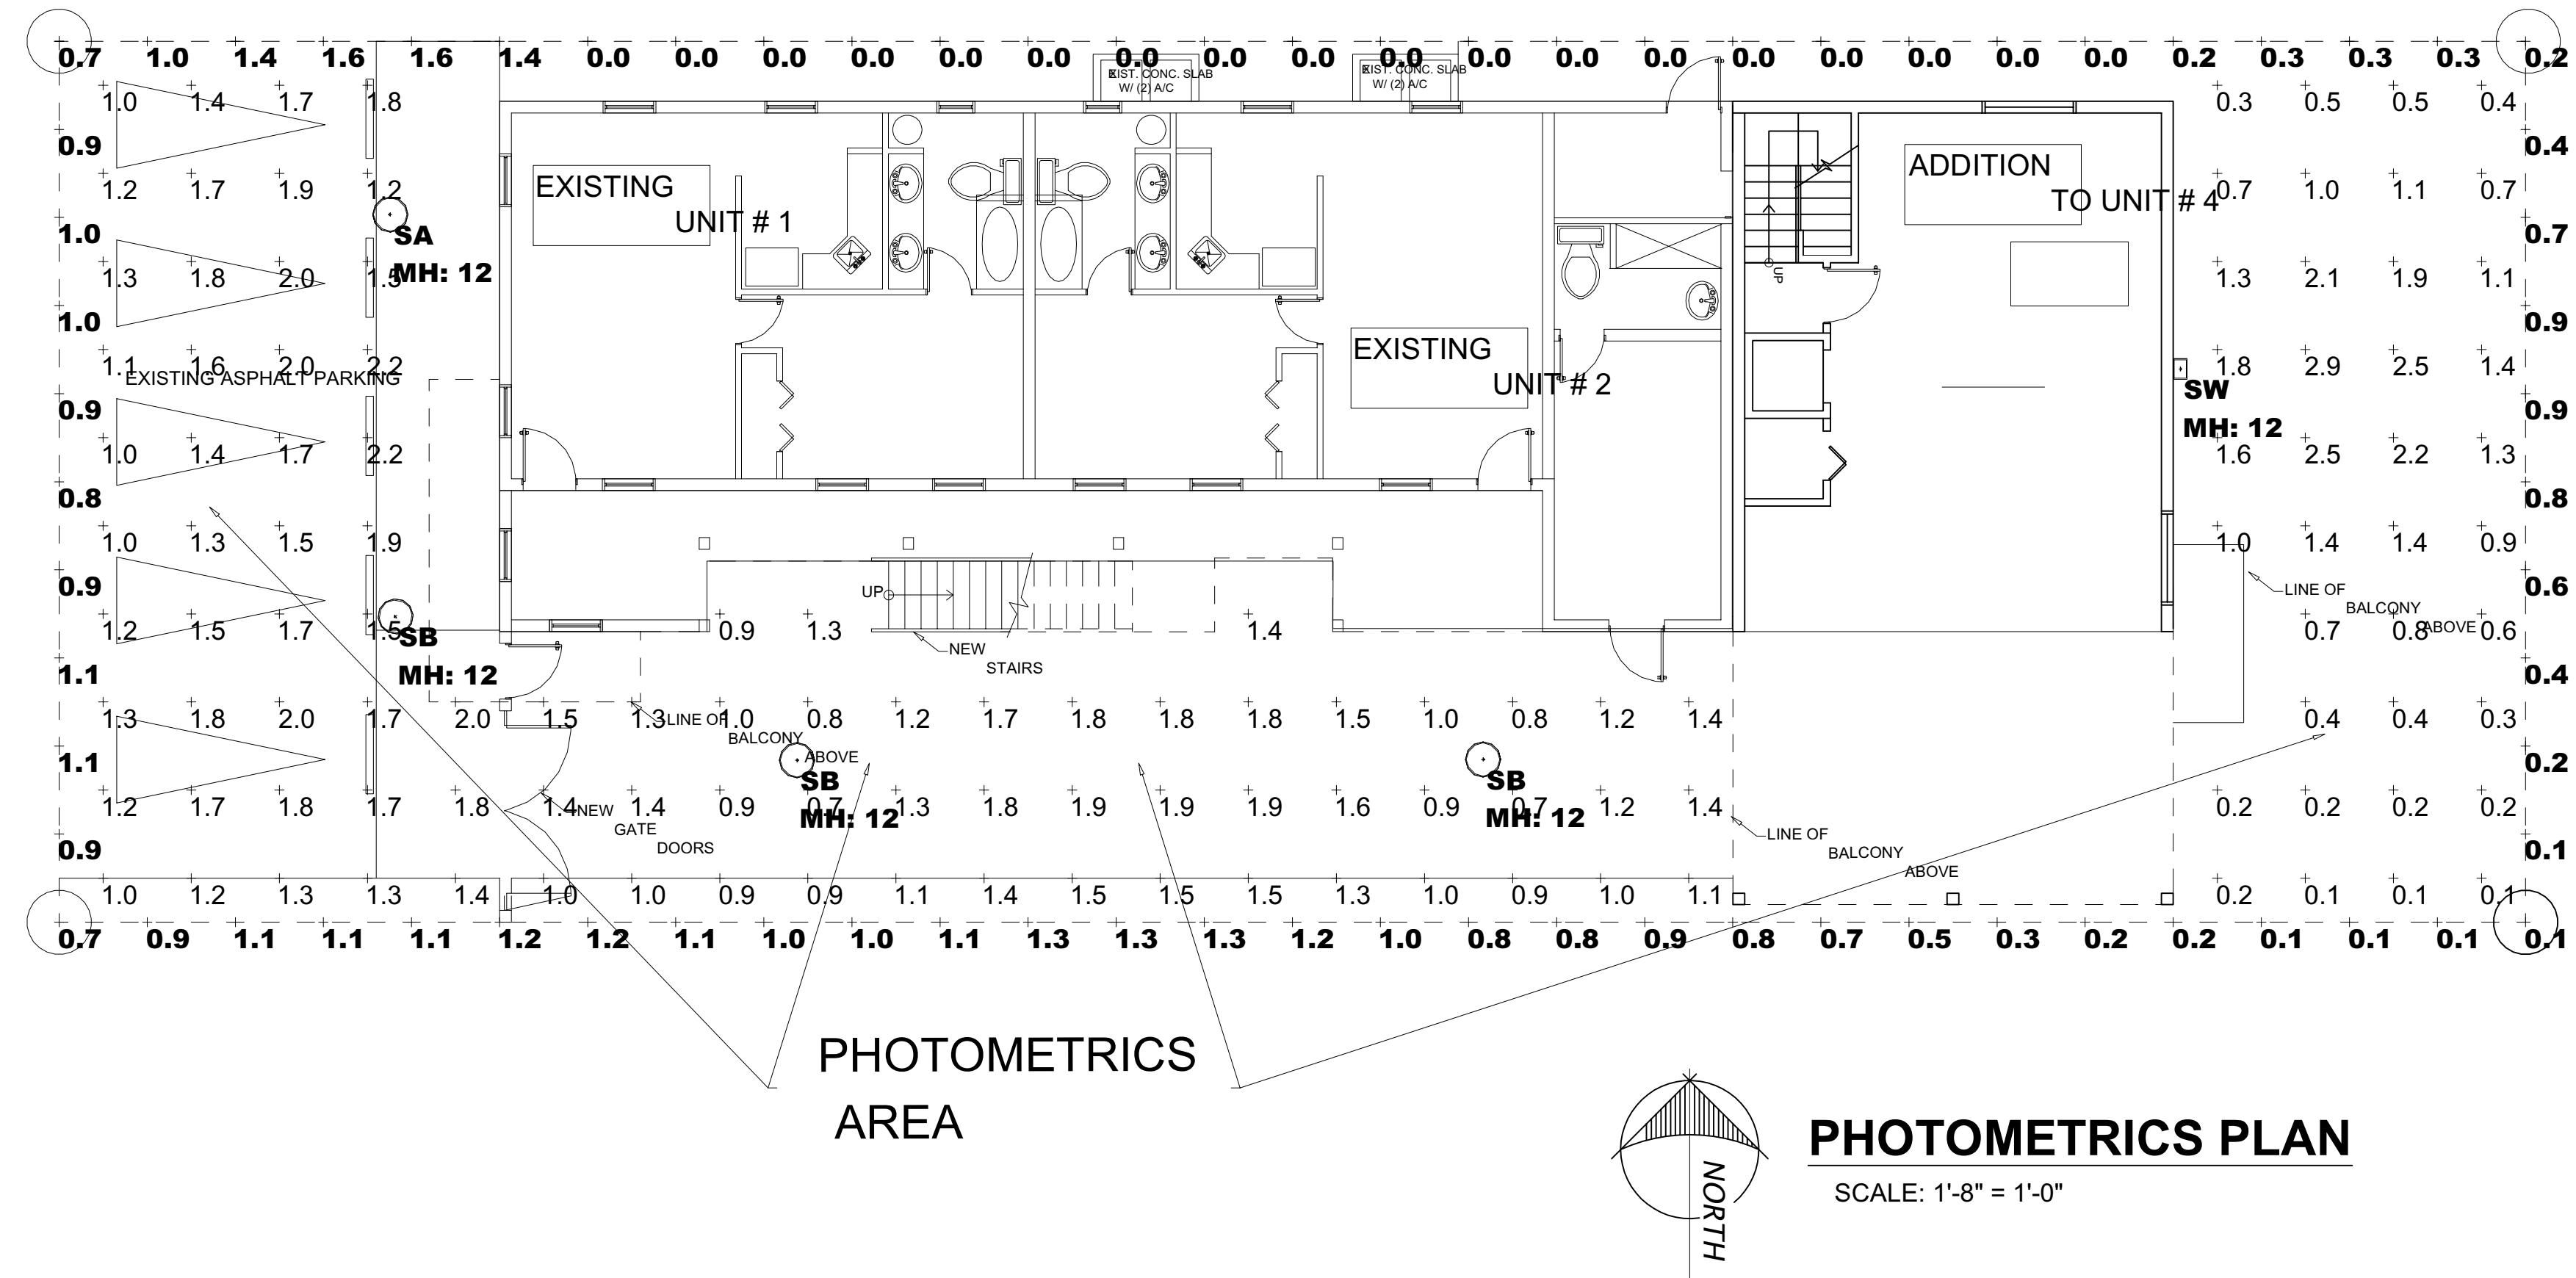

Luminaire Schedule									
Project: 504 OCEAN BLVD - SITE POMPANO, FL 03/03/2021									
Symbol	Qty	Label	Arrangement	Manufacturer	Description	Luminaire Lumens	LLF	Luminaire Watts	Assembly Watts
	1	SA	SINGLE	Lithonia Lighting	RADPT P1 40K SYM MH: POST TOP MOUNT A.F.G	3343	0.855	25.4134	25.4134
	3	SB	SINGLE	Lithonia Lighting	RADPT P1 40K PATH MH: POST TOP MOUNT A.F.G	2592	0.855	25.4134	25.4134
	1	SW	SINGLE	Lithonia Lighting	ARC2 LED P1 40K MH: WALL MOUNT A.F.G	1587	0.855	10.6112	10.6112

Calculation Summary							
Project: 504 OCEAN BLVD - SITE POMPANO, FL 03/03/2021							
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
PROPERTY LINE	Illuminance	Fc	0.60	1.6	0.0	N.A.	N.A.
PARKING LOT	Illuminance	Fc	1.53	2.2	1.0	1.53	2.20
SITE	Illuminance	Fc	1.16	2.9	0.1	11.60	29.00

DRC  
PZ21-12000018  
9/15/2021

DRC  
PZ21-12000018  
7/7/2021

REVISIONS BY

PROPERTY OWNER:  
**ANAM USMAN**  
PROPERTY ADDRESS:  
504 SOUTH OCEAN BLVD  
POMPANO BEACH FL

TITLE SHEET  
PHOTOMETRICS  
FLOOR PLAN

Digitally signed by Luis E. Uriarte  
DN: cn=Luis E. Uriarte, o=0000017819588, ou=000001AE9, email=000001AE9, c=US  
Date: 2021.06.09 10:47:21 -0400

ARCHITECT:  
LUIS E. URIARTE  
Florida Architect  
18100 ATLANTIC BOULEVARD PHONE  
786 290 9807 Email: invusa@live.com

DRAWN BY:  
**LUIS URIARTE**  
DATE: **6.3.2021**  
SCALE: **AS NOTED**  
PROJECT: