



SYMBOL LEGEND ::

XXXXXXXXXXXX

PERIMETER STAKED SILT FENCE
PER FDOT INDEX NO. 102




TYPICAL PROPOSED CATCH BASIN
WITH FILTER FABRIC (SEE NOTE 3)



TYPICAL STABILIZED ROCK ENTRY DRIVE
PER FDOT INDEX NO. 102

SEDIMENT & EROSION CONTROL NOTES ::

1. CONTRACTOR SHALL INSTALL AND MAINTAIN EROSION CONTROL AND SEDIMENTATION CONTROL MEASURES IN ACCORDANCE WITH THE STANDARDS FOR SOIL EROSION AND SEDIMENT CONTROL IN FLORIDA (HEREAFTER REFERRED TO AS FL. GUIDELINES)
2. MAINTENANCE MEASURES SHALL BE APPLIED AS NEEDED DURING THE ENTIRE CONSTRUCTION CYCLE. AFTER EACH RAINFALL, A VISUAL INSPECTION SHALL BE MADE OF ALL INSTALLED EROSION CONTROL MEASURES AND REPAIRS SHALL BE CONDUCTED TO ENSURE THEIR CONTINUING FUNCTION AS DESIGNED.
3. CATCH BASIN, INLETS AND STORM SEWER MANHOLES, STRUCTURES WITHIN THE SITE WILL BE PROTECTED DURING FILLING OPERATIONS FROM SEDIMENT RUNOFF AND DEBRIS BY PLACING A FILTER FABRIC MATERIAL IN THE FRAME AND GRATE/MANHOLE COVER. PREVENTIVE METHODS MUST BE UTILIZED AROUND THESE STRUCTURES, DURING FILLING OPERATIONS, BY GRADING TO DRAIN AWAY FROM STRUCTURES AND ANY OTHER METHODS APPROVED BY THE COUNTY/MUNICIPAL ENGINEER OR DESIGN ENGINEER OF RECORD.

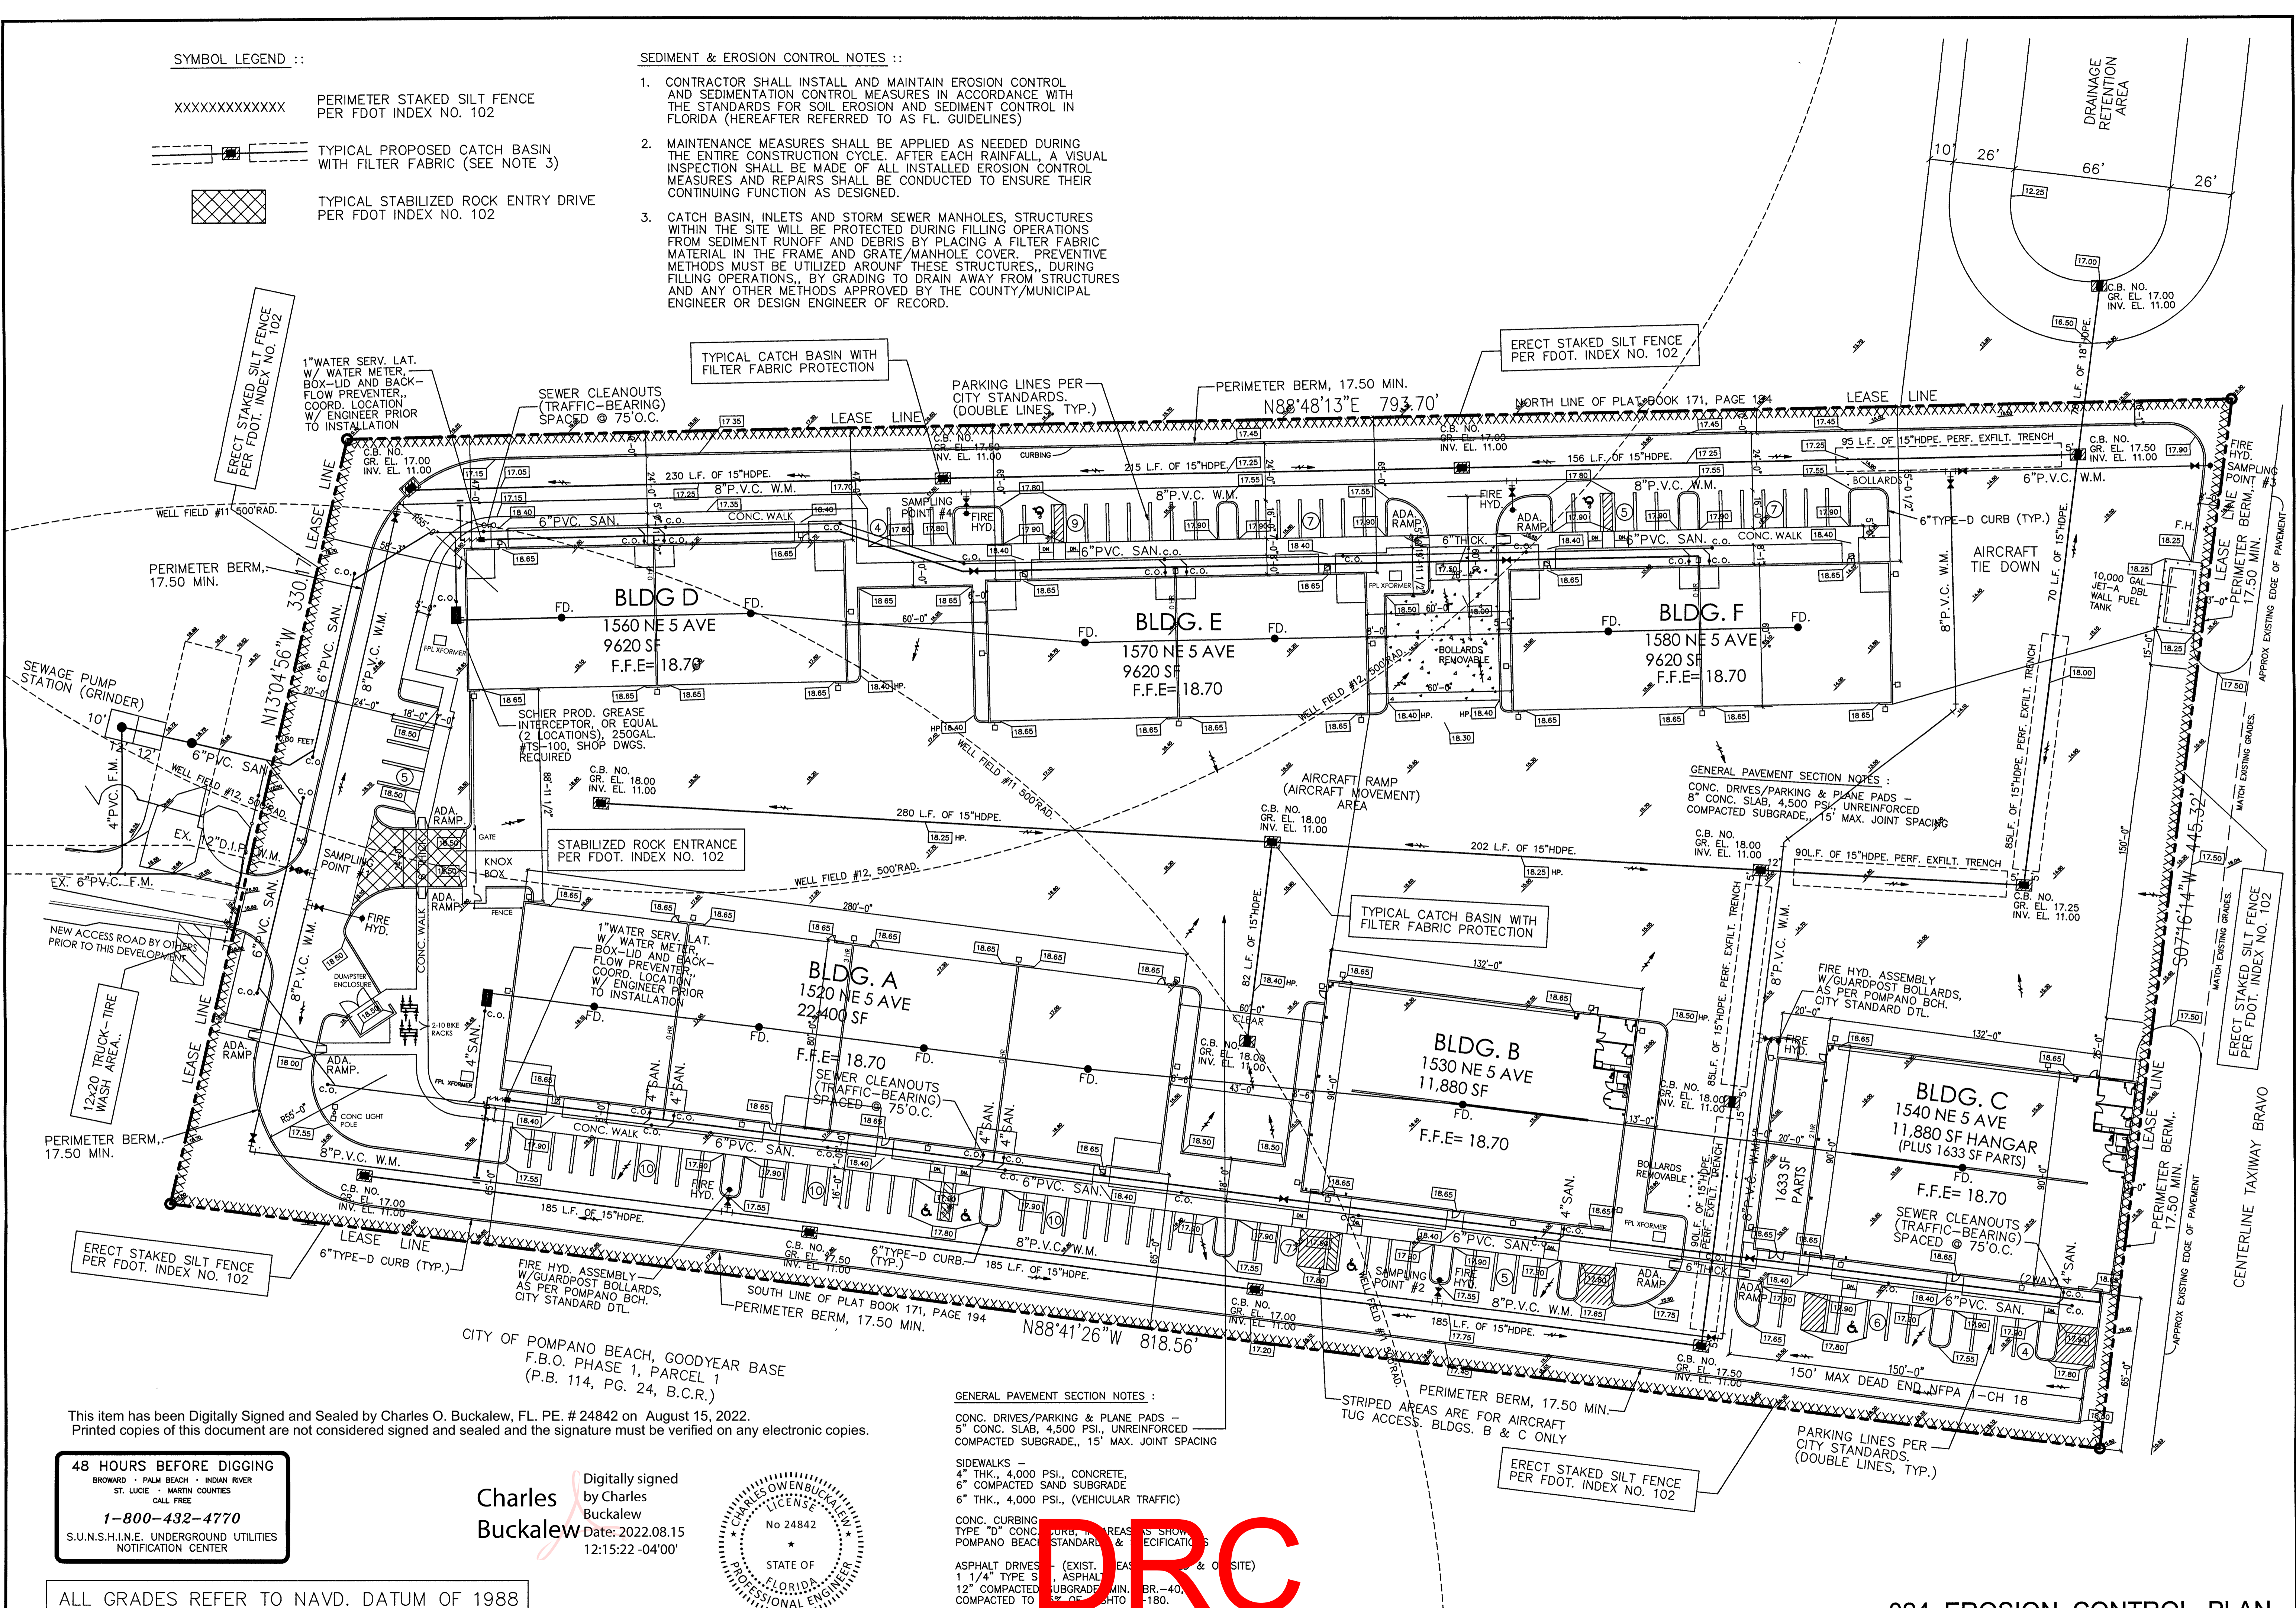

SITE IMPROVEMENT PLANS FOR POMPAÑO BEACH AIR PARK - PARCEL Y

1520-1580 NE. 5th. AVENUE, POMPAÑO BEACH FLORIDA 33060

Charles O. Buckalew

Consulting Engineering Services, Inc.
801 South Ocean Drive, Suite 201
Hollywood, Florida 33019
C.O.A. Number: 6255
Tele.: (954) 558-1189 Fax: (954) 929-8988




CHARLES O. BUCKALEW, P.E.
FLORIDA REG. NO. 24842

This item has been Digitally Signed and Sealed by Charles O. Buckalew, FL. PE, # 24842 on August 15, 2022.
Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

48 HOURS BEFORE DIGGING
BROWARD • PALM BEACH • INDIAN RIVER
ST. LUCIE • MARTIN COUNTIES
CALL FREE
1-800-432-4770
S.U.N.S.H.I.N.E. UNDERGROUND UTILITIES
NOTIFICATION CENTER

Charles O. Buckalew
Digitally signed by Charles
Buckalew Date: 2022.08.15
12:15:22 -04'00'

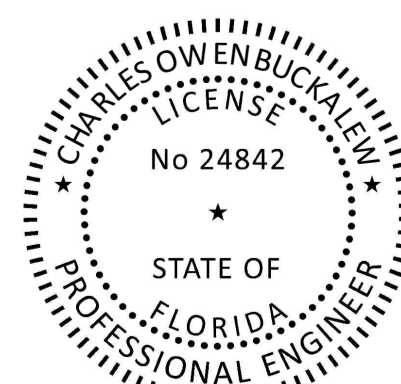

GENERAL PAVEMENT SECTION NOTES :
CONC. DRIVES/PARKING & PLANE PADS -
5" CONC. SLAB, 4,500 PSI., UNREINFORCED
COMPACTED SUBGRADE, 15' MAX. JOINT SPACING
SIDEWALKS -
4" THK., 4,000 PSI., CONCRETE,
5" COMPACTED SAND SUBGRADE
6" THK., 4,000 PSI., (VEHICULAR TRAFFIC)
CONC. CURBING
TYPE "D" CONC. CURB, 18" HIGH, 12" WIDE, 12" RADIUS, 12" COMPACTED SUBGRADE, 15' MAX. JOINT SPACING
POMPAÑO BEACH SPECIFICATIONS
ASPHALT DRIVES (EXIST. EAS. & SITE)
1 1/4" TYPE S, ASPHALT
12" COMPACTED SUBGRADE MIN. BR.-40,
COMPACTED TO 1% OF SHTO -180.

DRC

P722-12000020
9/21/2022

024 EROSION CONTROL PLAN

DATE MAY, 2022
SCALE 1"=30'-0"
BY C.R.W.
JOB MA-2285
SHT EC-1