
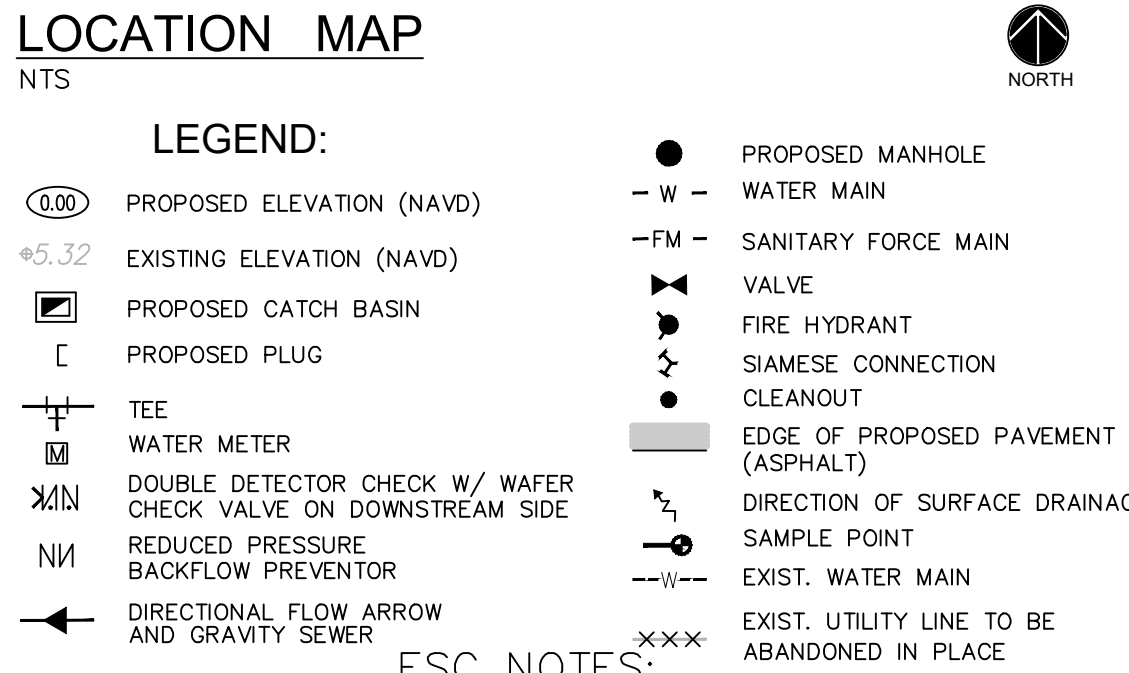


This document has been digitally
signed and sealed by
Blake M. Kidwell on 08/19/2025.


Printed copies of this document are not
considered signed and sealed.

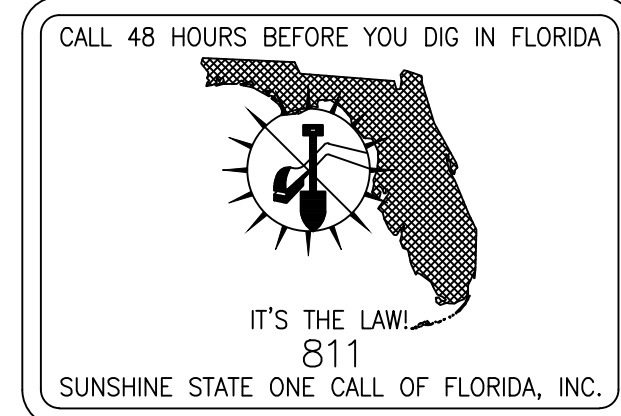

1. THIS PLAN REFLECTS THE ENGINEER'S SUGGESTION FOR EROSION AND SEDIMENT CONTROL. SITE OPERATOR TO MODIFY PLAN AS NEEDED TO MAINTAIN "BEST MANAGEMENT PRACTICES" DURING CONSTRUCTION.
2. AT ALL TIMES DURING CONSTRUCTION, ALL STORMWATER MUST REMAIN ON SITE. NO DISCHARGE INTO THE PUBLIC RIGHT OF WAY OR ADJOINING PROPERTIES IS ALLOWED.
3. DRAINAGE STRUCTURES INSTALLED TO BE PROTECTED WITH FILTER FABRIC AND/OR PERIMETER SILT FENCE.
4. PROVIDE FILTER FABRIC OR OTHER METHOD OF SEDIMENT PROTECTION FOR ANY EXISTING CATCH BASIN/INLET WITHIN 10 FEET OF THE PROJECT AREA.
5. ANY SEDIMENT THAT IS TRACKED ONTO ROADS MUST BE SWEEP UP IMMEDIATELY.
6. SEDIMENT SHALL NOT BE REMOVED BY WASHING/FLUSHING WITH WATER AT THE RIGHT OF WAY.
7. PRIOR TO START OF CONSTRUCTION, AN ENGINEERING ROUGH INSPECTION MUST BE SCHEDULED TO VERIFY EROSION AND SEDIMENTATION CONTROL IS SETUP PROPERLY AND SO THAT INSPECTION CAN BE DONE AT SITE FOR CONSTRUCTION MITIGATION TO REQUEST AN INSPECTION.

Revisions		
1		
2		
3		
4		
5		
6		
7		
8		

Phase:
PERMIT
DOCUMENTS

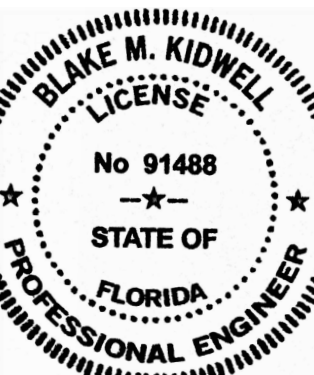

Scale: 1"=20'	Date 12/18/24
Job No. 24-1832.00	Plot Date 08/19/25
Drawn by BMK	Sheet No. ESC
Proj. Mgr. BMK	
Appr. by BMK	4 of -