


STATE ROAD NO. A-1-A  
OCEAN BOULEVARD

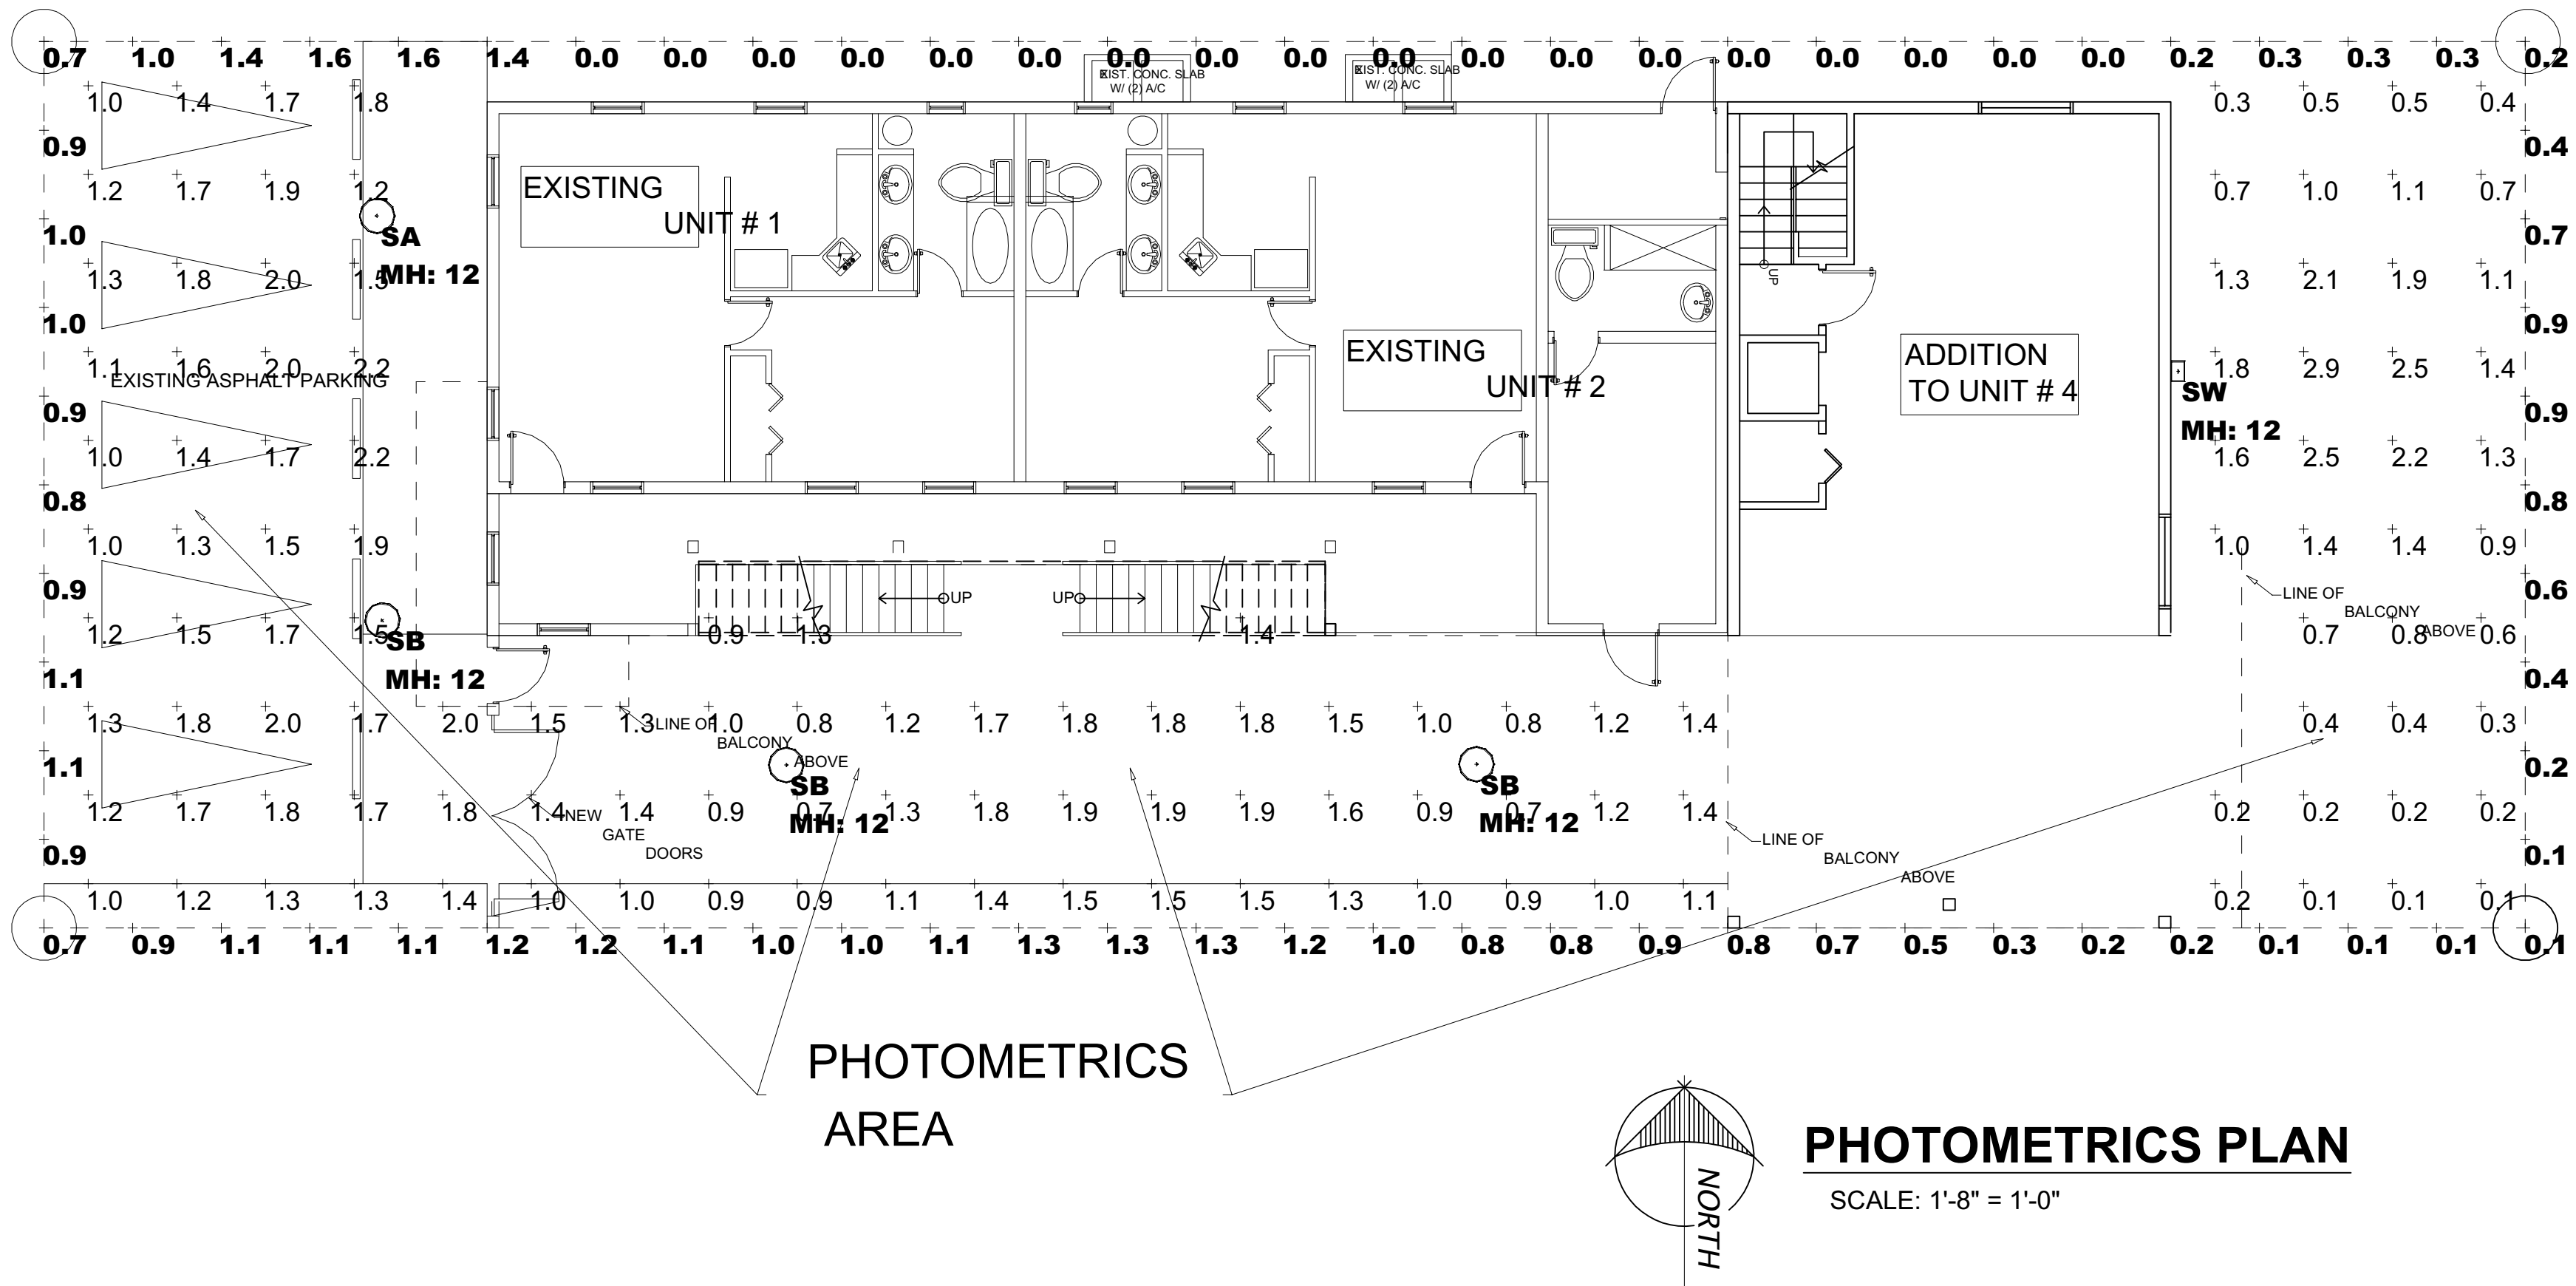

Luminaire Schedule									
Project: 504 OCEAN BLVD - SITE    POMPANO, FL    03/03/2021									
Symbol	Qty	Label	Arrangement	Manufacturer	Description	Luminaire Lumens	LLF	Luminaire Watts	Assembly Watts
	1	SA	SINGLE	Lithonia Lighting	RADPT P1 40K SYM    MH: POST TOP MOUNT A.F.G	3343	0.855	25.4134	25.4134
	3	SB	SINGLE	Lithonia Lighting	RADPT P1 40K PATH    MH: POST TOP MOUNT A.F.G	2592	0.855	25.4134	25.4134
	1	SW	SINGLE	Lithonia Lighting	ARC2 LED P1 40K    MH: WALL MOUNT A.F.G	1587	0.855	10.6112	10.6112

Calculation Summary							
Project: 504 OCEAN BLVD - SITE    POMPANO, FL    03/03/2021							
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
PROPERTY LINE	Illuminance	Fc	0.60	1.6	0.0	N.A.	N.A.
PARKING LOT	Illuminance	Fc	1.53	2.2	1.0	1.53	2.20
SITE	Illuminance	Fc	1.16	2.9	0.1	11.60	29.00

AAC  
PZ21-12000018  
12/07/21

ARCHITECT / ENGINEER STATEMENT NOTE:  
TO THE BEST OF THE ARCHITECT'S OR ENGINEER'S KNOWLEDGE, THE PLANS AND SPECIFICATIONS COMPLY WITH THE APPLICABLE MINIMUM BUILDING CODES AND THE APPLICABLE FIRE STANDARDS AS DETERMINED BY THE LOCAL AUTHORITY IN ACCORDANCE WITH THIS SECTION & CHAPTER 833, FLORIDA STATUTES.

REVISIONS BY

PROPERTY OWNER:  
ANAM USMAN  
PROPERTY ADDRESS:  
504 SOUTH OCEAN BLVD  
POMPANO BEACH FL

TITLE SHEET  
PHOTOMETRICS  
FLOOR PLAN

Digitally signed  
by Luis E. Uriarte  
DN: cn=Luis E. Uriarte, o=Invusa LLC, email=luise@invusa.com, c=US

luis e  
uriarteA01410D  
0000017819588  
29200001AE9

Date:  
2021.09.29  
03:34:45 -0400

ARCHITECT:  
LUIS E. URIARTE  
Florida Architect  
18100 ATLANTIC BOULEVARD  
786 290 9807

License # AR 94107  
BOULEVARD PHONE  
Email: invusa@ive.com

DRAWN BY:  
LUIS URIARTE

DATE  
6.3.2021

SCALE:  
AS NOTED

PROJECT :

013  
PHOTO