

SEAL:

PROJECT NUMBER: CLR2023-03

CLIENT:  THE COLLIER COMPANIES


TITLE:

BUILDING 2000
LEVEL 01

SHEET NUMBER

A1-21



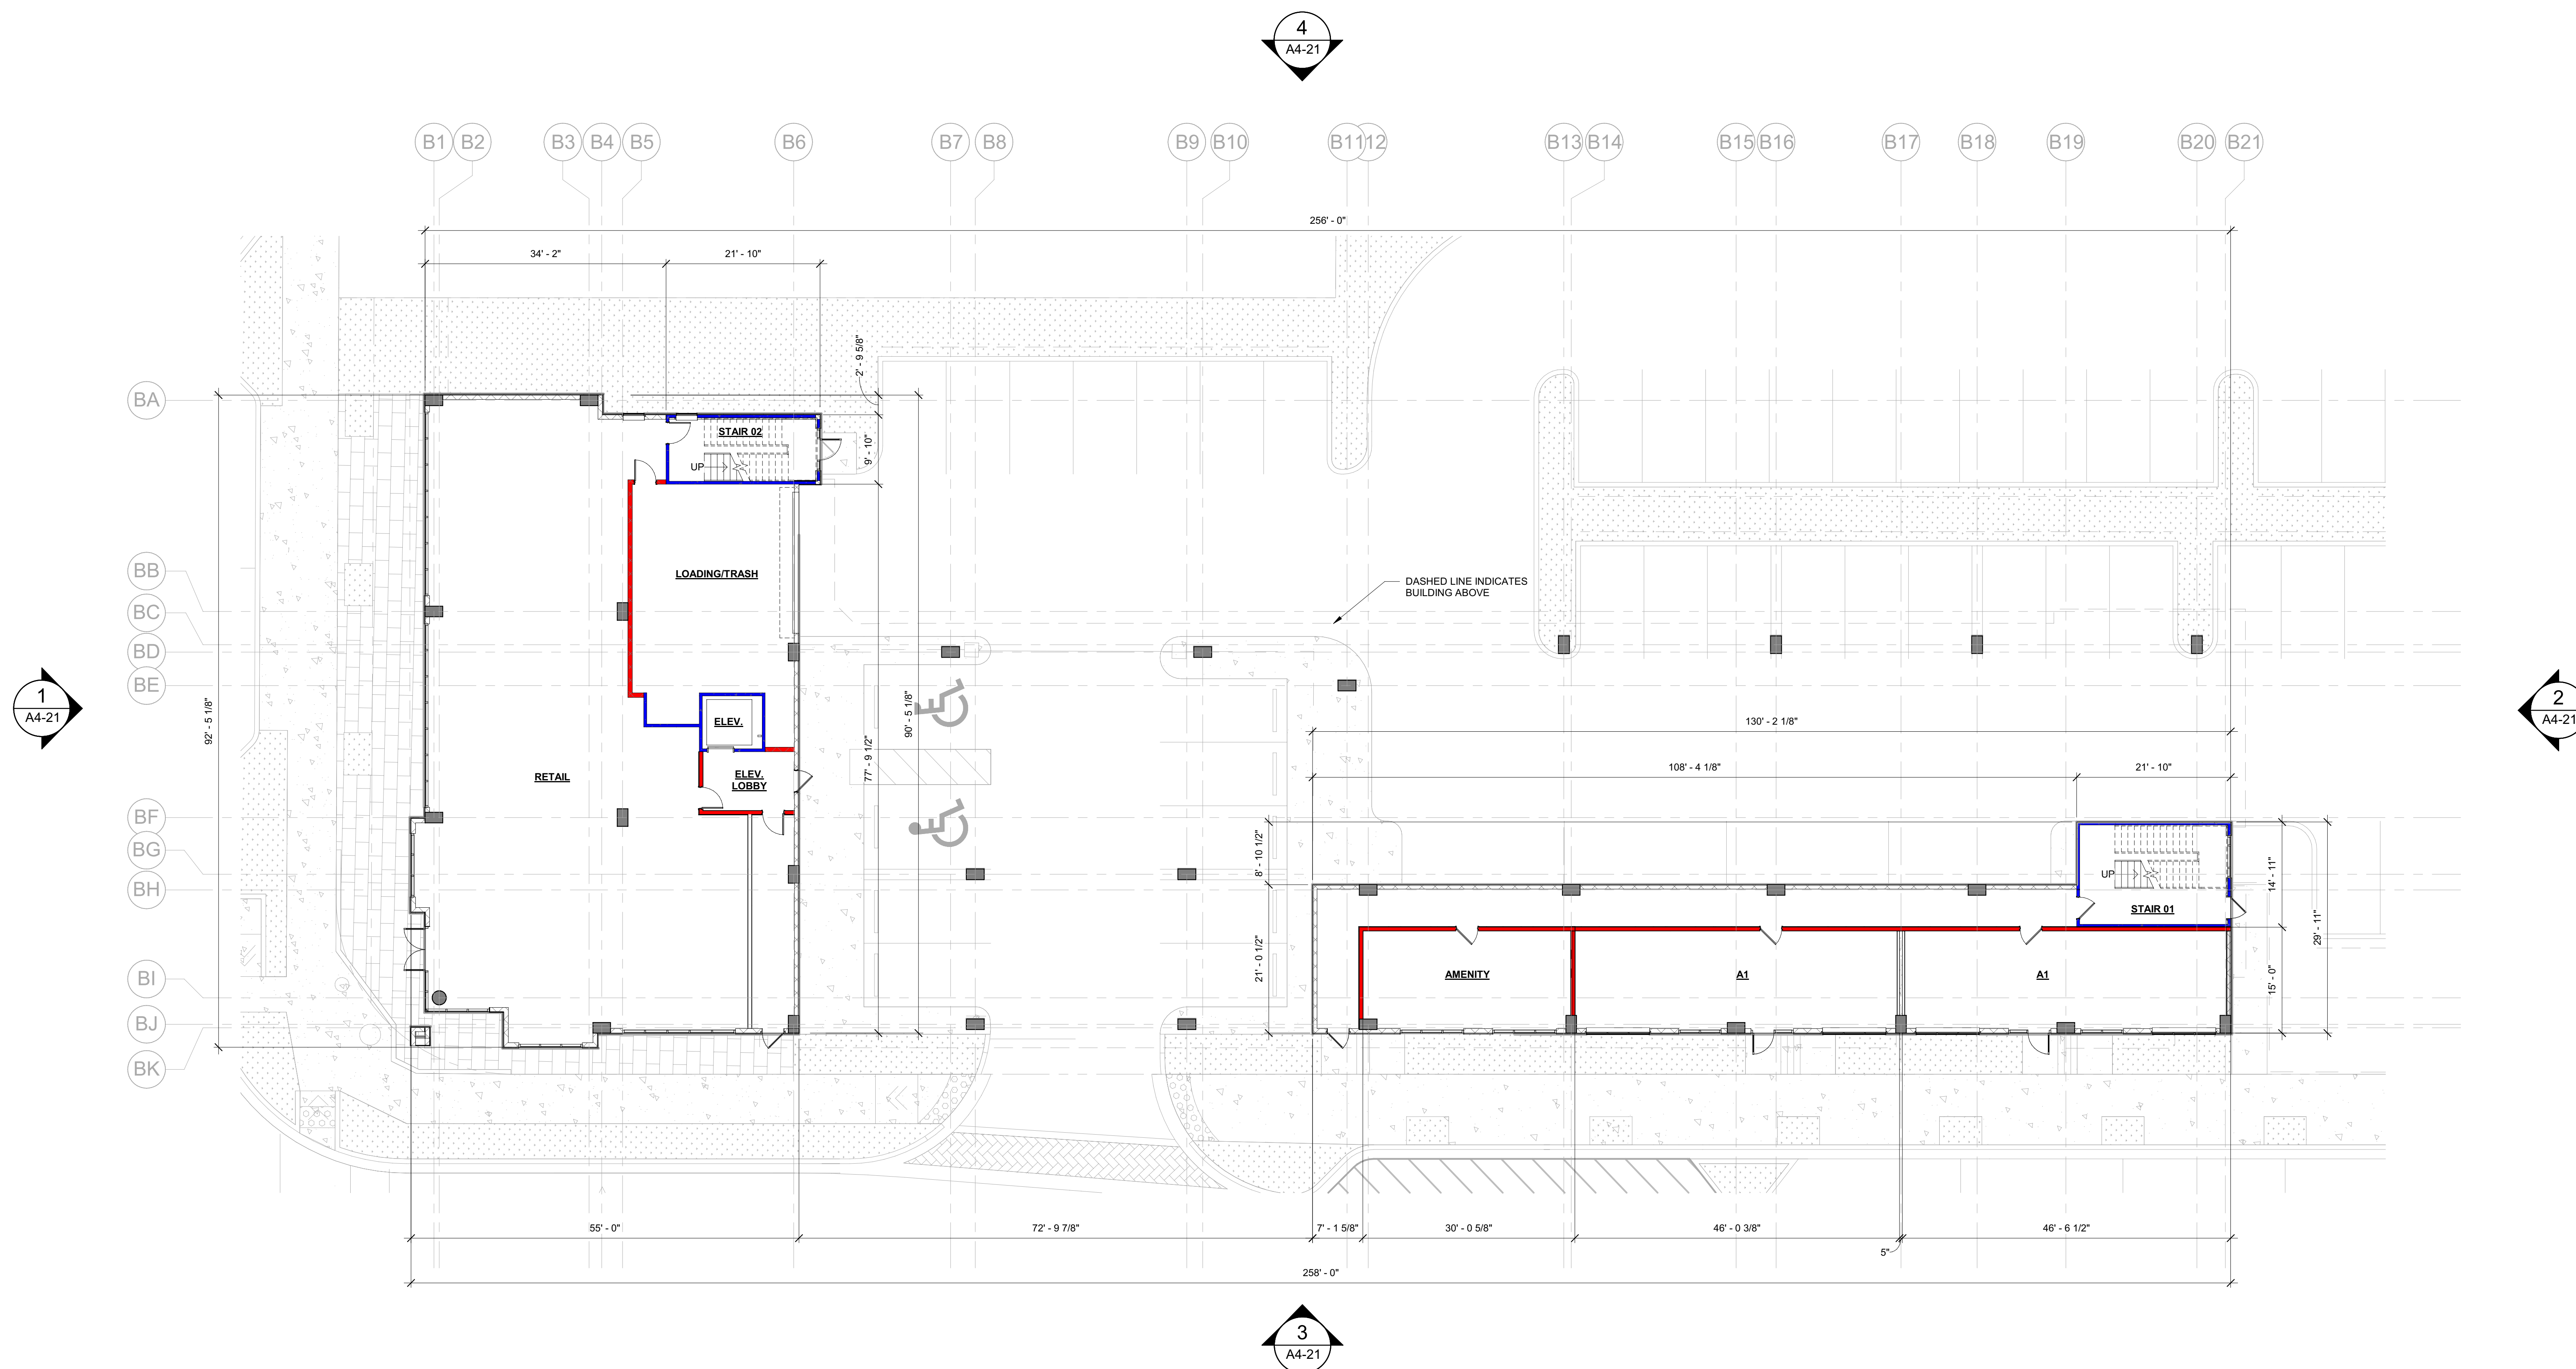


© COPYRIGHT 2024 DYNAMIK DESIGN



1 BLDG 2000 - LEVEL 01
SCALE: 3/32" = 1'-0"

Figure 10: Examples of Unit Identification Callouts

Callout Symbol	Description
	CMU WALL
	CAST-IN-PLACE CONCRETE WALL
	PRECAST CONCRETE WALL
	ROOM NUMBER RESIDENTIAL UNIT DESIGNATION LOCATION OF ENLARGED UNIT PLANS, RCP AND INTERIOR ELEVATION REFERENCES
	WALL PARTITION
	DOOR CALLOUT
	WINDOW TYPE CALLOUT
	STOREFRONT TYPE CALLOUT

	FIRE EXTINGUISHER CABINET - SURFACE MOUNT
	FIRE EXTINGUISHER CABINET - SEMI-RECESSED
	FIRE EXTINGUISHER CABINET - RECESSED
	1-HOUR RATING
	2-HOUR RATING

1. REFER TO A3 SERIES FOR ENLARGED RESIDENTIAL UNIT PLANS, INTERIOR DOOR TYPES AND LOCATIONS, RESIDENTIAL UNIT RCPs, FISH FLOOR PLAN, AND FHA PLAN.
2. REFER TO SHEET CD SERIES FOR WALL AND FLOOR/CEILING ASSEMBLY TYPES AND ADDITIONAL INFORMATION.
3. REFER TO A8 SERIES FOR DOOR SCHEDULES, LEGENDS, AND DETAILS.
4. ALL SLOPES TO BE 1/4" U.O.N.
5. REFER TO INTERIOR DRAWINGS FOR AMENITY LIGHTING AND FISH SPECIFICATIONS.
6. REFER TO INTERIOR DESIGN DRAWINGS FOR CONDITIONED CORRIDOR FINISHES. CONTROL JOINTS IN CORRIDOR CEILING TO BE 30'-0" O.C. MAX. PROVIDE JOINTS BEGINNING AT CORRIDOR INTERSECTIONS UNLESS NOTED OTHERWISE.

* DOOR LOCATIONS NOT SHOWN SHOULD BE LOCATED AT MIDPOINT OF WALL OR 4" CLEAR FROM ADJACENT WALL CORNER TO FINISH SIDE, TYPICAL.