


TREE DISPOSITION TABLE

NO.	BOTANICAL NAME	COMMON NAME	DISPOSITION	DBH (in)	CT (palms)	CONDITION	REMARKS	REMOVAL/MITIGATION	
								PALM (1:1)	DBH
1	SABAL PALMETTO	SABAL PALM	REMAIN		10	50%			
2	SABAL PALMETTO	SABAL PALM	REMAIN		11	50%			
2A	SABAL PALMETTO	SABAL PALM	REMAIN		5	50%			
3	CALOPHYLLUM INOPHYLLUM	CALOPHYLLUM TREE	TO BE REMOVED	17		40%	OHW conflict		17
4	CANOCARPUS ERECTUS	GREEN BUTTONWOOD	REMAIN	12		20%	OHW conflict		
5	SABAL PALMETTO	SABAL PALM	REMAIN		6	50%			
6	SABAL PALMETTO	SABAL PALM	REMAIN		10	50%			
7	SABAL PALMETTO	SABAL PALM	TO BE REMOVED		14	50%		1	
8	QUERCUS VIRGINIANA	LIVE OAK	REMAIN	21		45%			
9	SABAL PALMETTO	SABAL PALM	TO BE REMOVED		14	50%		1	
10	QUERCUS VIRGINIANA	LIVE OAK	REMAIN	19		50%			
11	FICUS AUREA	STRANGLER FIG	REMAIN	72		50%			
11A	SABAL PALMETTO	SABAL PALM	TO BE REMOVED		20	45%		1	
12	MAHOGANI SWIETENIA	MAHOGANY TREE	TO BE REMOVED	5		20%	minimal value		5
13	SABAL PALMETTO	SABAL PALM	TO BE REMOVED		9	50%		1	
14	QUERCUS VIRGINIANA	LIVE OAK	REMAIN	19		40%			
15	QUERCUS VIRGINIANA	LIVE OAK	TO BE REMOVED	17		40%			17
16	ARCHONTOPHOENIX ALEXANDRAE	ALEXANDER PALM	REMAIN		15	35%			
17	ADONIDIA MERRILLII	ADONIDIA PALM (CLUSTER)	TO BE REMOVED		11	50%		1	
18	ADONIDIA MERRILLII	ADONIDIA PALM	TO BE REMOVED		19	35%		1	
19	SYAGRUS ROMANZOFFIANA	QUEEN PALM	REMAIN		18	45%			


	REMAIN	REMOVE	TOTAL EXISTING	
TREES	5	3	8	
PALMS	7	6	13	
TOTAL PALMS TO BE REMOVED				
TOTAL TREES TO BE REMOVED IN DBH				
TOTAL CAL. INCH REQUIREMENTS				
TOTAL PROPOSED MITIGATION CANOPY (LIVE OAKS)				
TOTAL PROPOSED LIVE OAK WITH EXTRA HEIGHT TOWARDS MITIGATION				
LIVE OAK -12' HT MARKET VALUE				
LIVE OAK -20' HT MARKET VALUE				
TOTAL PROVIDED EXTRA HEIGHT IN ESTIMATED MARKET VALUE (10x20' HT LIVE OAKS)				
TOTAL PROPOSED REPLACEMENT 14' HT PALMS				

LEGEND

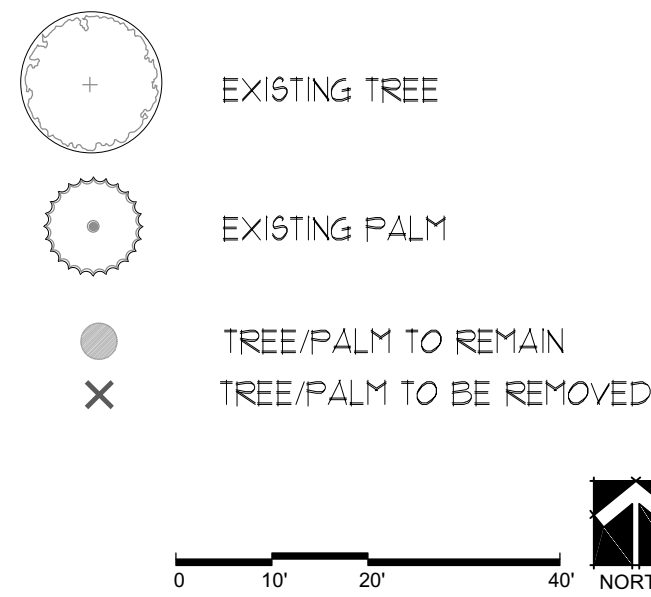

TREE DISPOSITION NOTES

- TREE DISPOSITION PLAN IS BASED ON ALL AVAILABLE INFORMATION. CONTRACTOR TO REPORT ALL DISCREPANCIES TO LANDSCAPE ARCHITECT FOR REVIEW PRIOR TO CONSTRUCTION/DEMOLITION.
- ALL PITS TO BE FILLED THE SAME DAY OF REMOVAL OF TREES AND/OR PALMS. RESTORE SURFACE WITH SOD OR MULCH TO MATCH EXISTING CONDITIONS.
- CONTRACTOR SHALL VERIFY ALL EXISTING ABOVE AND UNDERGROUND UTILITIES 48 HOURS PRIOR TO ANY ON-SITE EXCAVATION.
- ALL EXISTING TREES/PALMS TO REMAIN TO BE PROTECTED PER INDUSTRY STANDARDS. SEE TREE PROTECTION DETAIL.
- ALL TREES TO REMAIN SHALL BE PRUNED BY AN ISA CERTIFIED ARBORIST UNDER THE DIRECTION OF A BCMA OR ASCA REGISTERED CONSULTING ARBORIST.
- UNDERGROUND UTILITY LINES SHALL BE ROUTED AROUND THE TREE PROTECTION AREA WHEREVER POSSIBLE. IF IT IS NOT POSSIBLE, A TUNNEL MADE BY A POWER-DRIVEN SOIL AUGER MAY BE USED UNDER THE TREE.
- NO DEVELOPMENT, WORK OR DEMO ACTIVITY SHALL BE ALLOWED WITHIN THE DRIPLINE OF A TREE OR TREE PROTECTION AREA.
- PENALTIES WOULD INCUR BY THE CONTRACTOR FOR DAMAGES TO THE EXISTING TREES ON SITE FROM THE CONTRACTOR, THE SUBCONTRACTORS, OR EMPLOYEES. ANY ENCROACHMENT WITHIN THE TREE PROTECTION ZONE, FAILURE TO MAINTAIN THE TREE PROTECTION ZONE, OR ANY DAMAGE TO THE TREE(S) OR CRITICAL ROOT ZONES WILL RESULT IN MITIGATION. THE CAUSE OF DAMAGES WOULD INCLUDE, BUT NOT BE LIMITED TO, STORAGE OF MATERIALS, PLACING FILL OR DEBRIS, DISPOSAL OF PAINT OR SOLVENTS, PARKING OF MACHINES UNDER TREES OR TREE PROTECTION ZONE ENCROACHMENT. AN EXAMPLE OF THIS WOULD BE: VIOLATIONS OF THIS WILL RESULT IN A FINE OF \$1000.00 FOR THE FIRST OFFENSE, \$1500.00 FOR THE SECOND, AND \$2000.00 FOR THE THIRD, ETC. IF PHYSICAL DAMAGE IS DONE TO THE TREE, AN APPRAISAL OF THE DAMAGES AND RELATED FEES WILL BE DETERMINED BY AN ASCA REGISTERED CONSULTING ARBORIST, AND BE BASED ON ALL, OR A PERCENTAGE OF, THE ESTABLISHED VALUE ASSIGNED TO THE TREE.
- TREE SURVEY DATED 09/11/2023, PROVIDED BY: McLAUGHLIN ENGINEERING COMPANY
1700 NW 64TH STREET, SUITE 400
FORT LAUDERDALE, FL 33309
PHONE: 954 763 7611
- ARBORIST REPORT DATED 09/20/2023, PROVIDED BY: JAMES LEGETTE, LAUDERDALE TREE SERVICE, INC.
4320 SW 74TH AVENUE,
DAVIE, FLORIDA 33314
PHONE: 954 583 1888

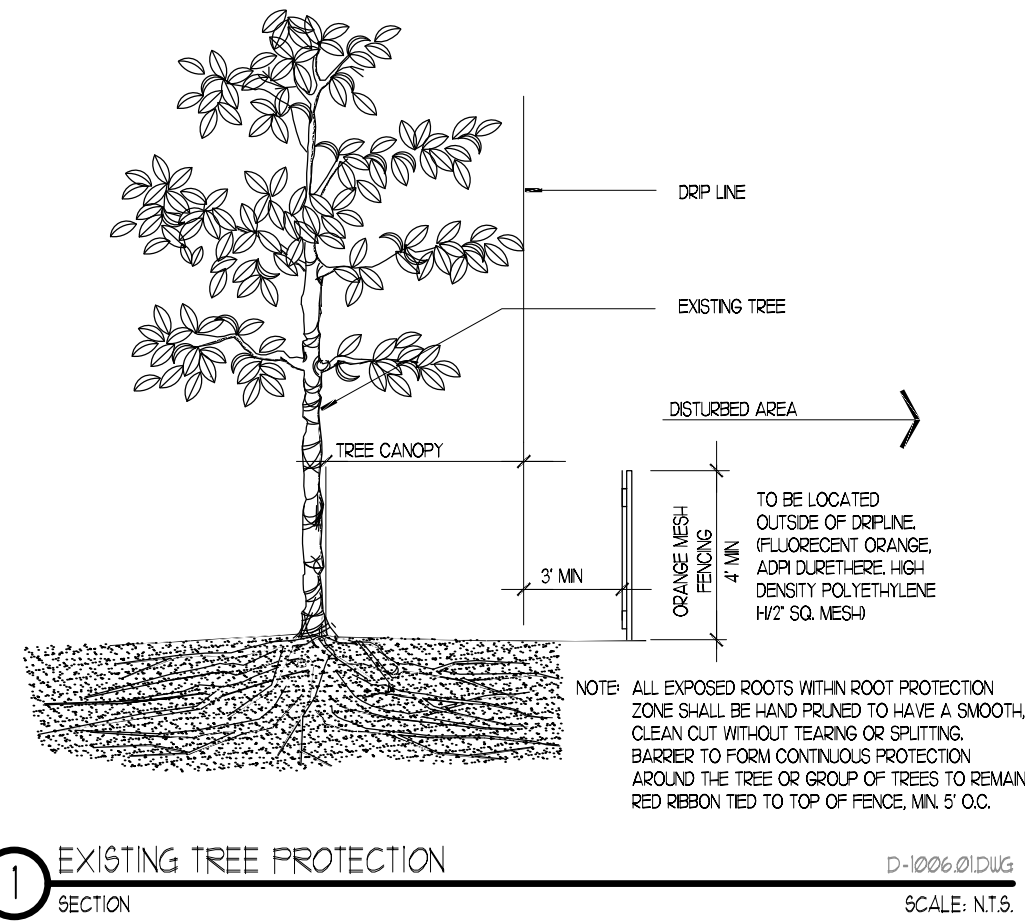

DULAND DESIGN
landscape architects

PROJECT: RETAIL DEVELOPMENT
4191 N. FEDERAL HIGHWAY
FORT LAUDERDALE, FLORIDA

TITLE: TREE DISPOSITION

DATE: MAY 6, 2024
DRAWN BY: CD
CHECKED BY: CD

JOB NO: 3017

SHEET: L 1.01

CALL 48 HOURS BEFORE YOU DIG
IT'S THE LAW!
811
SUNSHINE STATE ONE CALL OF FLORIDA, INC.

SITE PLAN REVIEW SUBMITTAL